

查询"HMC881LP5_10"供应商



v01.0110



HMC881LP5E


FILTER - TUNABLE, LOW PASS SMT
2.2 - 4.0 GHz

Typical Applications

The HMC881LP5E is ideal for:

- Test & Measurement Equipment
- Military, RADAR & EW
- SATCOM & Space
- R&D Laboratories

Functional Diagram

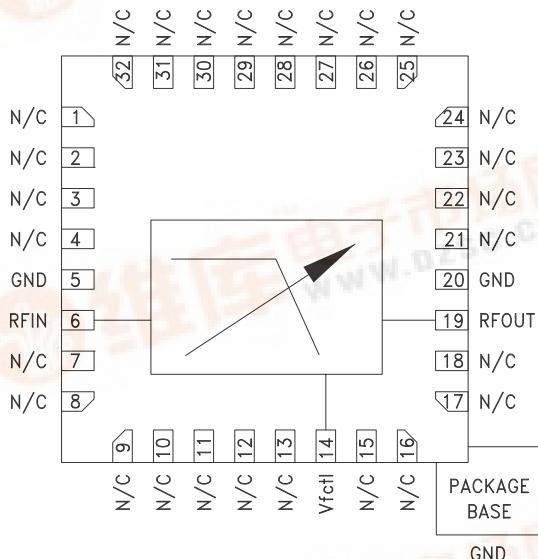

Electrical Specifications, $T_A = +25^\circ\text{C}$

Parameter	Min.	Typ.	Max.	Units
Passband	0		4	GHz
$f_{\text{cutoff}}^{[1]}$ Tuning Range	2.2		4	GHz
Stopband Frequency (Rejection >20 dB)		1.25 x f_{cutoff}		GHz
Re-entry Frequency (Rejection <30 dB)		30		GHz
Insertion Loss		3.8		dB
Return Loss		10		dB
Maximum Input Power for Linear Operation			10	dBm
Frequency Control Voltage (Vfctl)	0		14	V
Frequency Control Port Source/Sink Current (I_{fctl})			±1	mA
Residual Phase Noise [2] (1 MHz offset)		-165		dBc/Hz
f_{cutoff} Drift Rate (Fixed Vfctl)		-0.8		MHz/°C
Tuning Characteristics [3]				
tFULLBAND (0% Vfctl to 90% RF)		150		ns


[1] f_{cutoff} defined as the point at which the insertion loss is 3 dB below the minimum passband insertion loss.

[2] Optimum residual phase noise performance requires the use of a low noise driver circuit.


[3] Tuning speed is dependent on driver circuit. Data measured with a high speed op-amp driver and includes driver slew rate delay.




Broadband Insertion Loss vs. Control Voltage

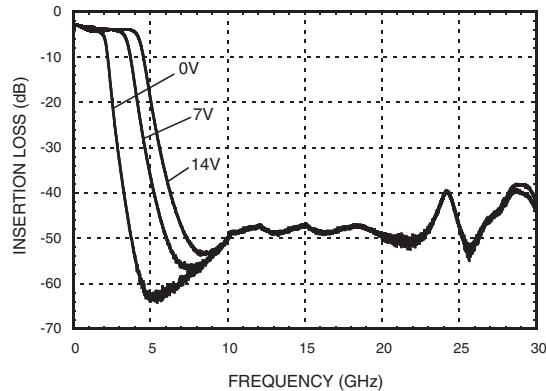


Broadband Return Loss vs. Control Voltage

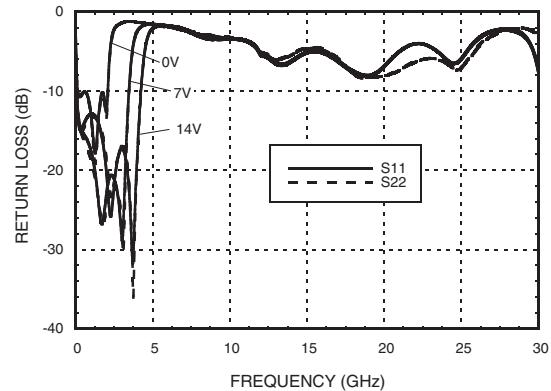


Insertion Loss vs. Control Voltage [1]

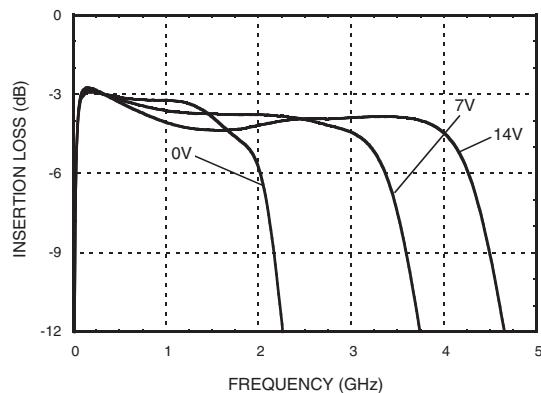


Return Loss vs. Control Voltage [1]

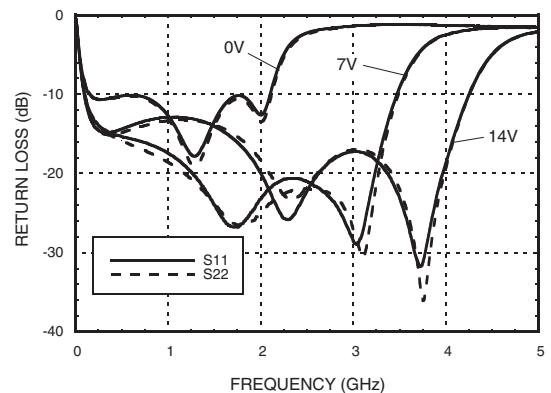

Insertion Loss vs. Temperature, Vfctl @ 7V [1]

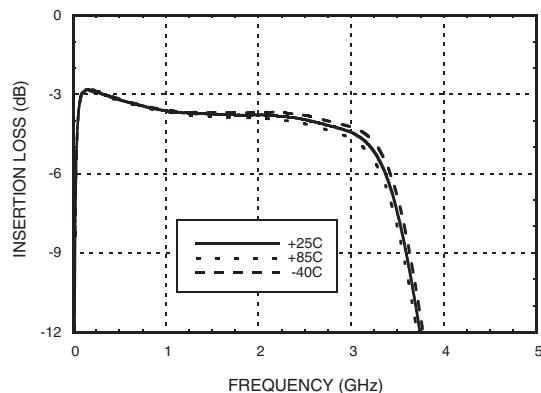

Return Loss vs. Temperature, Vfctl @ 7V [1]






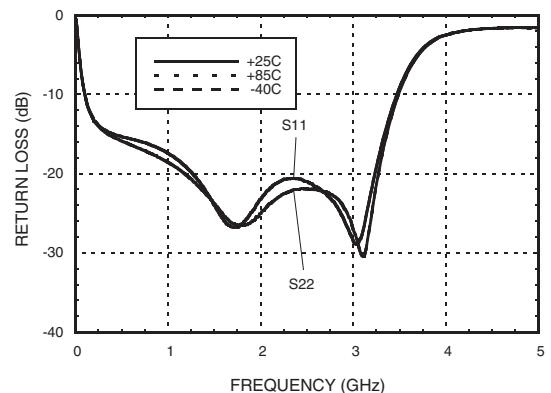


[1] Low frequency performance limited by external DC blocking capacitors at RF input and output.

查询"HMC881LP5_10"供应商



v01.0110

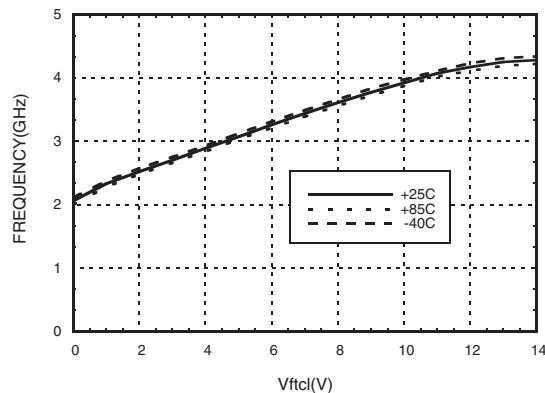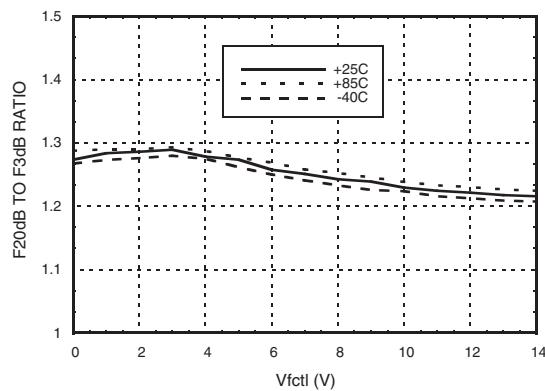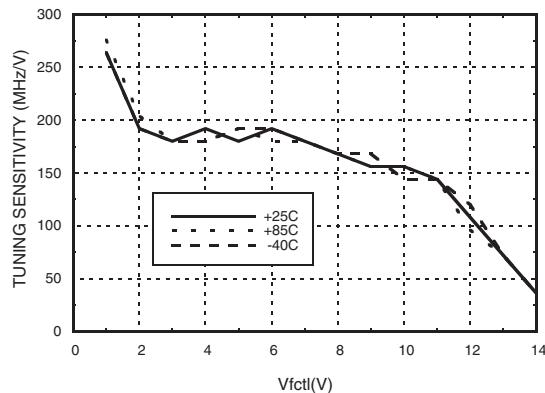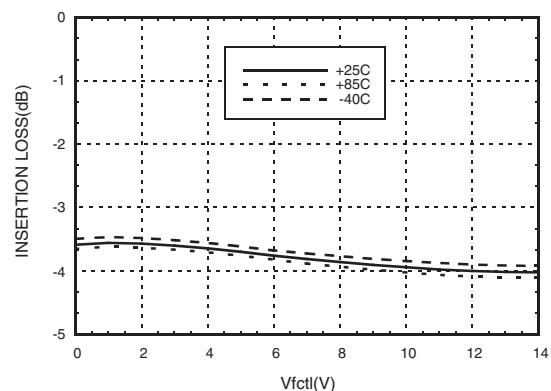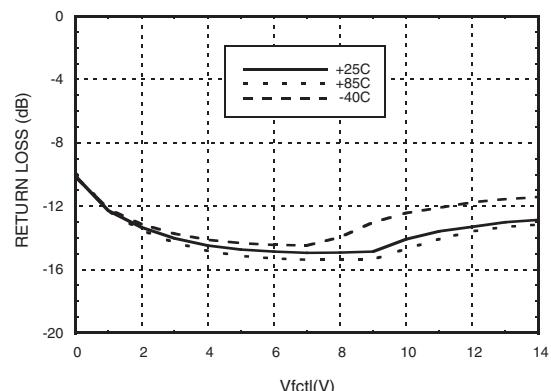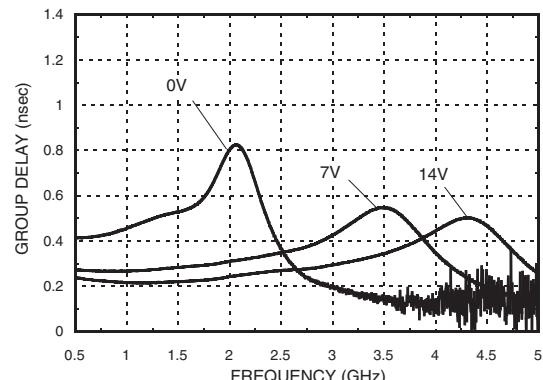**HMC881LP5E****FILTER - TUNABLE, LOW PASS SMT
2.2 - 4.0 GHz****Cutoff Frequency vs. Temperature****Rejection Ratio vs. Temperature^[1]****Tuning Sensitivity vs. Temperature****Average Insertion Loss vs.
Temperature in a 2 dB Bandwidth****Maximum Return Loss in a 2 dB
Bandwidth vs. Temperature****Group Delay**[1] Rejection ratio is defined as the ratio of the frequency at which the relative insertion loss is 20 dB, to f_{cutoff}

For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.comApplication Support: Phone: 978-250-3343 or apps@hittite.com

查询"HMC881LP5_10"供应商



v01.0110



HMC881LP5E

FILTER - TUNABLE, LOW PASS SMT
2.2 - 4.0 GHz

3

Absolute Maximum Ratings

Frequency Control Voltage (Vfctl)	-0.5 to +15V
RF Power Input	26.5 dBm
Storage Temperature	-65 to +150 °C
ESD Rating (HBM)	Class 1B


Reliability Information

Junction Temperature to Maintain 1 Million Hour MTTF	150 °C
Nominal Junction Temperature (T= 85 °C and Pin = 10 dBm)	90 °C
Operating Temperature	-40 to +85 °C



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing

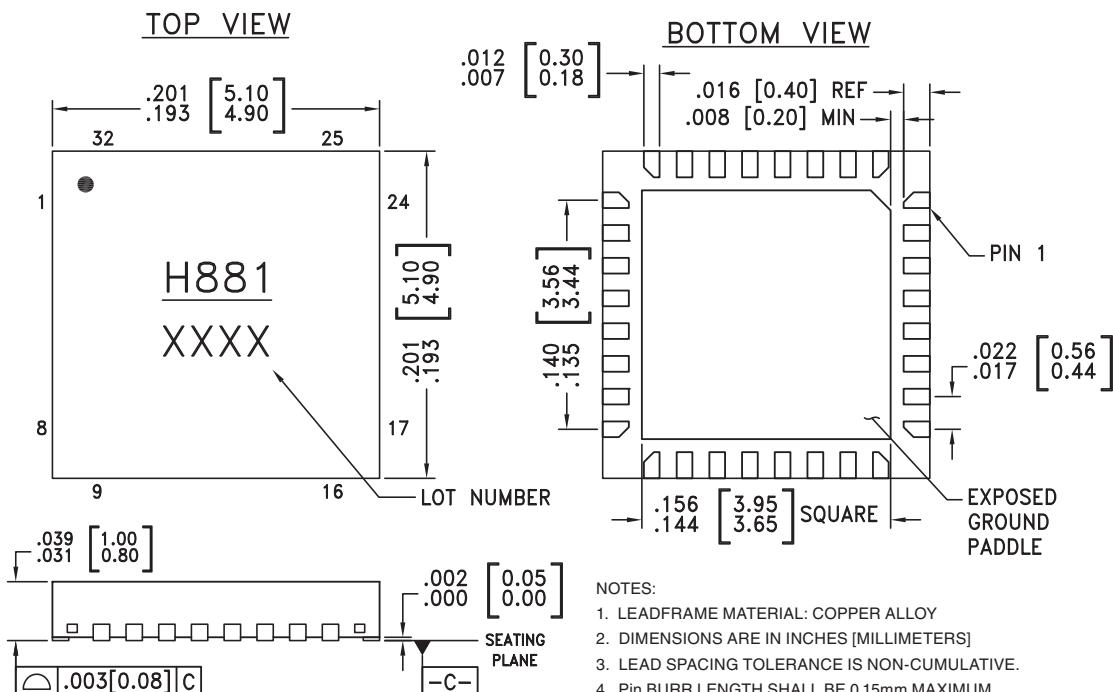

Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[1]
HMC881LP5E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[2]	H881 XXXX

[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C

For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support: Phone: 978-250-3343 or apps@hittite.com

FILTERS - TUNABLE - SMT

3 - 5

查询"HMC881LP5_10"供应商



HMC881LP5E

v01.0110




FILTER - TUNABLE, LOW PASS SMT
2.2 - 4.0 GHz

Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1 - 4, 7 - 13, 15 - 18, 21 - 32	N/C	The pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally.	
5, 20	GND	These pins and exposed paddle must be connected to RF/DC ground.	
6	RFIN	This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin.	
14	Vfctl	Cutoff frequency control voltage.	
19	RFOUT	This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin.	

Application Circuit

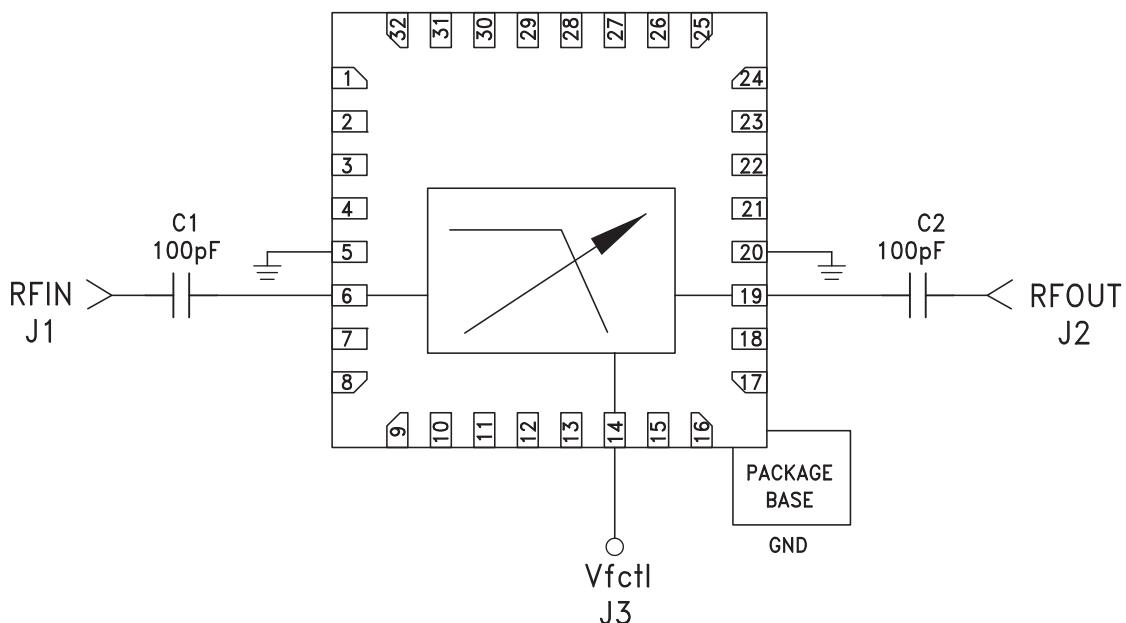

For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support: Phone: 978-250-3343 or apps@hittite.com

查询"HMC881LP5_10"供应商



v01.0110


HMC881LP5E



FILTER - TUNABLE, LOW PASS SMT
2.2 - 4.0 GHz

3

Evaluation PCB

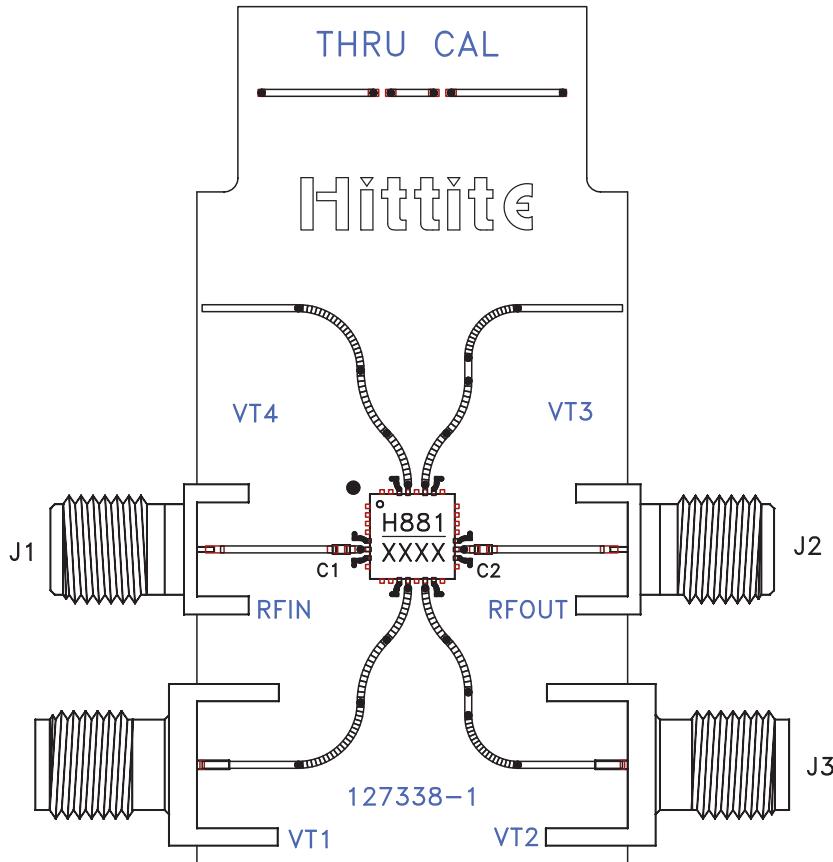

List of Materials for Evaluation PCB 128531 ^[1]

Item	Description
J1 - J3	SMA - SRI
C1, C2	100 pF Capacitor, 0402 Pkg.
U1	HMC881LP5E Filter
PCB [2]	127338 Evaluation PCB

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25FR or Rogers 25FR

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohms impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support: Phone: 978-250-3343 or apps@hittite.com

FILTERS - TUNABLE - SMT

3 - 7

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn