


[查询"MMBD717LT1G"供应商](#)

## Common Anode Schottky Barrier Diodes

These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand held and portable applications where space is limited.


- Extremely Fast Switching Speed
- Extremely Low Forward Voltage — 0.28 Volts (Typ) @  $I_F = 1 \text{ mAdc}$



**MMBD717LT1**

Motorola Preferred Device

**20 VOLT  
SCHOTTKY BARRIER  
DETECTOR AND SWITCHING  
DIODES**



**CASE 419-02, STYLE 2  
SOT-323 (SC-70)**

### MAXIMUM RATINGS ( $T_J = 125^\circ\text{C}$ unless otherwise noted)

| Rating   | Symbol    | Value           | Unit                       |
|--|-----------|-----------------|----------------------------|
| Reverse Voltage  | $V_R$     | 20              | Volts                      |
| Forward Power Dissipation<br>@ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_F$     | 200<br>1.6      | mW<br>mW/ $^\circ\text{C}$ |
| Operating Junction<br>Temperature Range  | $T_J$     | $-55$ to $+150$ | $^\circ\text{C}$           |
| Storage Temperature Range  | $T_{stg}$ | $-55$ to $+150$ | $^\circ\text{C}$           |

### DEVICE MARKING

MMBD717LT1 = B3

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic   | Symbol      | Min | Typ  | Max  | Unit            |
|--|-------------|-----|------|------|-----------------|
| Reverse Breakdown Voltage<br>( $I_R = 10 \mu\text{A}$ )                | $V_{(BR)R}$ | 20  | —    | —    | Volts           |
| Total Capacitance<br>( $V_R = 1.0 \text{ V}$ , $f = 1.0 \text{ MHz}$ ) | $C_T$       | —   | 2.0  | 2.5  | pF              |
| Reverse Leakage<br>( $V_R = 10 \text{ V}$ )                            | $I_R$       | —   | 0.05 | 1.0  | $\mu\text{Adc}$ |
| Forward Voltage<br>( $I_F = 1.0 \text{ mAdc}$ )                        | $V_F$       | —   | 0.28 | 0.37 | Vdc             |

**Preferred** devices are Motorola recommended choices for future use and best overall value.

Thermal Clad is a registered trademark of the Bergquist Company.

REV 3



# MMBD717LT1

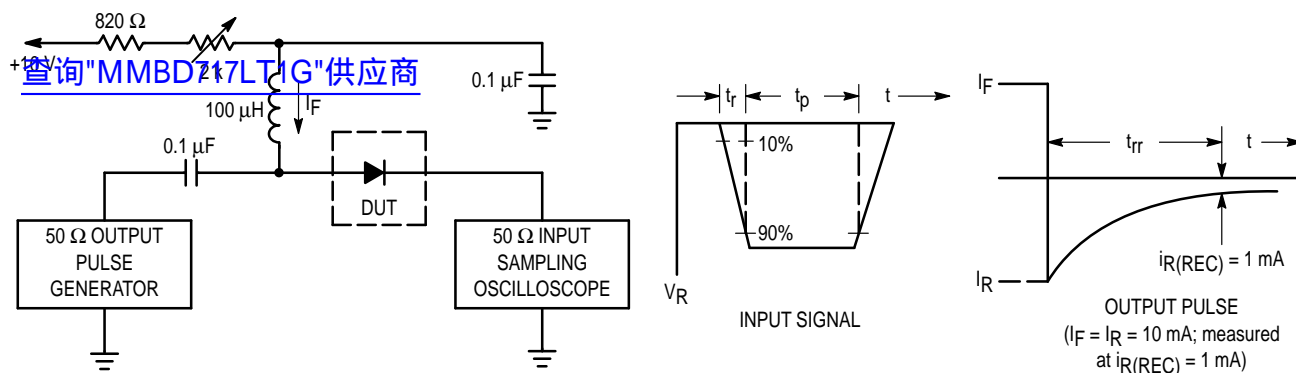


Figure 1. Recovery Time Equivalent Test Circuit

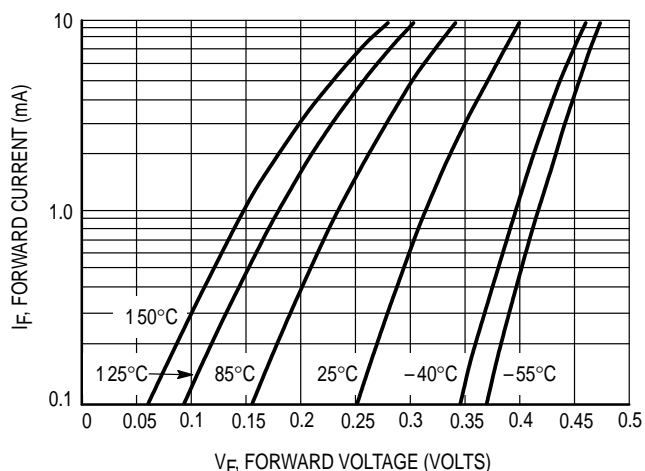


Figure 2. Typical Forward Voltage

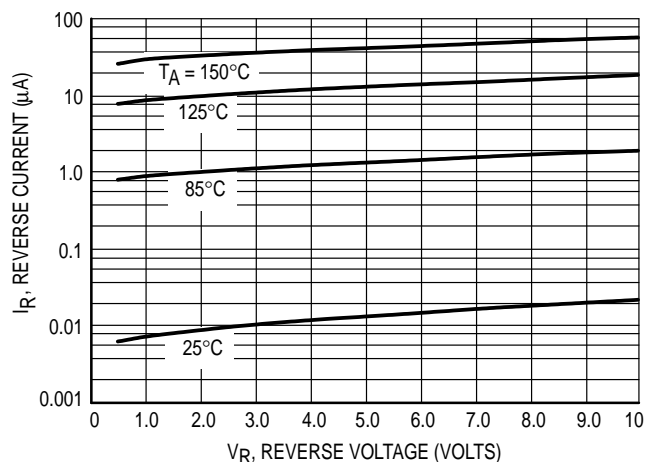


Figure 3. Reverse Current versus Reverse Voltage

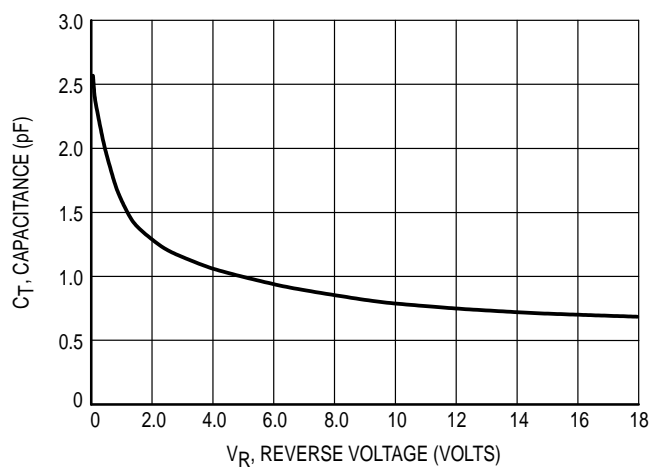


Figure 4. Typical Capacitance


## INFORMATION FOR USING THE SOT-323 SURFACE MOUNT PACKAGE

[查询"MMBD717LT1G"供应商](#)

### MINIMUM RECOMMENDED FOOTPRINT FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the semiconductor packages must be the correct size to insure proper solder connection

interface between the board and the package. With the correct pad geometry, the packages will self align when subjected to a solder reflow process.

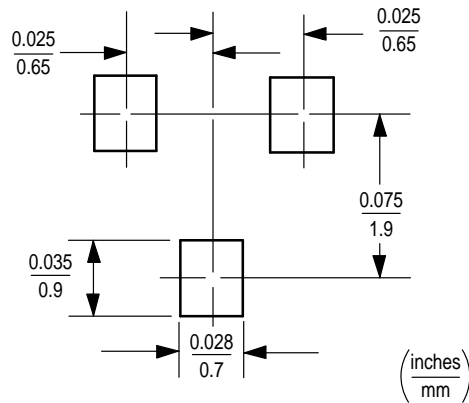

### SC-70/SOT-323 POWER DISSIPATION

The power dissipation of the SC-70/SOT-323 is a function of the collector pad size. This can vary from the minimum pad size for soldering to the pad size given for maximum power dissipation. Power dissipation for a surface mount device is determined by  $T_{J(max)}$ , the maximum rated junction temperature of the die,  $R_{\theta JA}$ , the thermal resistance from the device junction to ambient; and the operating temperature,  $T_A$ . Using the values provided on the data sheet,  $P_D$  can be calculated as follows.

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

The values for the equation are found in the maximum ratings table on the data sheet. Substituting these values into the equation for an ambient temperature  $T_A$  of 25°C, one can calculate the power dissipation of the device which in this case is 200 milliwatts.

$$P_D = \frac{150^\circ\text{C} - 25^\circ\text{C}}{625^\circ\text{C/W}} = 200 \text{ milliwatts}$$

The 625°C/W assumes the use of the recommended footprint on a glass epoxy printed circuit board to achieve a power dissipation of 200 milliwatts. There are other alternatives to achieving higher power dissipation from the SC-70/SOT-323 package. Another alternative would be to use a ceramic substrate or an aluminum core board such as Thermal Clad™. Using a board material such as Thermal Clad, a power dissipation of 300 milliwatts can be achieved using the same footprint.


### SOLDERING PRECAUTIONS

The melting temperature of solder is higher than the rated temperature of the device. When the entire device is heated to a high temperature, failure to complete soldering within a short time could result in device failure. Therefore, the following items should always be observed in order to minimize the thermal stress to which the devices are subjected.

- Always preheat the device.
- The delta temperature between the preheat and soldering should be 100°C or less.\*
- When preheating and soldering, the temperature of the leads and the case must not exceed the maximum temperature ratings as shown on the data sheet. When using infrared heating with the reflow soldering method, the difference should be a maximum of 10°C.
- The soldering temperature and time should not exceed 260°C for more than 10 seconds.
- When shifting from preheating to soldering, the maximum temperature gradient should be 5°C or less.
- After soldering has been completed, the device should be allowed to cool naturally for at least three minutes. Gradual cooling should be used as the use of forced cooling will increase the temperature gradient and result in latent failure due to mechanical stress.
- Mechanical stress or shock should not be applied during cooling

\* Soldering a device without preheating can cause excessive thermal shock and stress which can result in damage to the device.

## PACKAGE DIMENSIONS

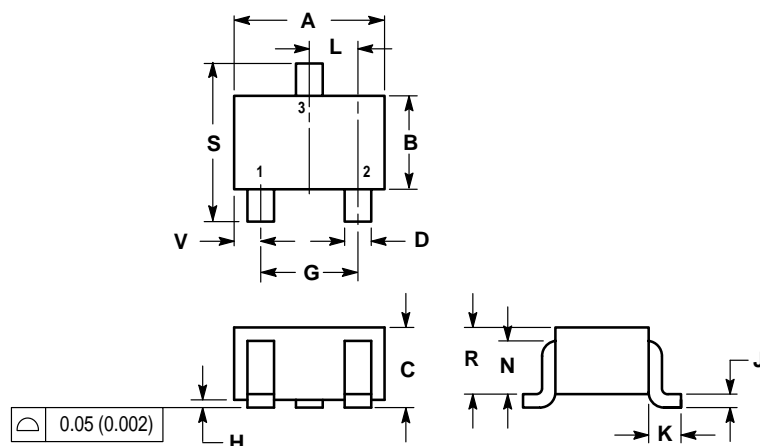[查询"MMBD717LT1G"供应商](#)

## NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.071     | 0.087 | 1.80        | 2.20 |
| B   | 0.045     | 0.053 | 1.15        | 1.35 |
| C   | 0.035     | 0.049 | 0.90        | 1.25 |
| D   | 0.012     | 0.016 | 0.30        | 0.40 |
| G   | 0.047     | 0.055 | 1.20        | 1.40 |
| H   | 0.000     | 0.004 | 0.00        | 0.10 |
| J   | 0.004     | 0.010 | 0.10        | 0.25 |
| K   | 0.017 REF |       | 0.425 REF   |      |
| L   | 0.026 BSC |       | 0.650 BSC   |      |
| N   | 0.028 REF |       | 0.700 REF   |      |
| R   | 0.031     | 0.039 | 0.80        | 1.00 |
| S   | 0.079     | 0.087 | 2.00        | 2.20 |
| V   | 0.012     | 0.016 | 0.30        | 0.40 |

## STYLE 2:

- PIN 1. ANODE
- N.C.
- CATHODE

**CASE 419-02  
ISSUE H  
SOT-323 (SC-70)**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

## How to reach us:

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4-32-1,  
Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan. 81-3-5487-8488

## Customer Focus Center: 1-800-521-6274

**Mfax™:** RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609  
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848  
– http://sps.motorola.com/mfax/

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

**HOME PAGE:** <http://motorola.com/sps/>



**MOTOROLA**



**MMBD717LT1/D**