

General Description

The AO7403 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge, and operation with gate voltages as low as 1.8V, in the small SOT323 footprint. It can be used for a wide variety of applications, including load switching, low current inverters and low current DC-DC converters. It is ESD protected to 2KV HBM. AO7403L (Green Product) is offered in a lead-free package.

Features



$$V_{DS} (V) = -20V$$

$$I_D = -0.7A$$

$$R_{DS(ON)} < 470m\Omega (V_{GS} = -4.5V)$$

$$R_{DS(ON)} < 625m\Omega (V_{GS} = -2.5V)$$

$$R_{DS(ON)} < 900m\Omega (V_{GS} = -1.8V)$$



Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 8	V
Continuous Drain Current ^A	I_D	$T_A=25^\circ C$	-0.7
		$T_A=70^\circ C$	-0.5
Pulsed Drain Current ^B	I_{DM}	-3	A
Power Dissipation ^A	P_D	$T_A=25^\circ C$	0.35
		$T_A=70^\circ C$	0.22
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^\circ C$

Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient ^A	$R_{\theta JA}$	$t \leq 10s$	300	$^\circ C/W$
Maximum Junction-to-Ambient ^A		Steady-State	350	$^\circ C/W$
Maximum Junction-to-Lead ^C	$R_{\theta JL}$	280	320	$^\circ C/W$

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=-250\mu\text{A}$, $V_{GS}=0\text{V}$	-20			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=-16\text{V}$, $V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			-1 -5	μA
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}$, $V_{GS}=\pm 8\text{V}$			± 10	μA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}$, $I_D=-250\mu\text{A}$	-0.5	-0.6	-0.9	V
$I_{D(ON)}$	On state drain current	$V_{GS}=-4.5\text{V}$, $V_{DS}=-5\text{V}$	-3			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=-4.5\text{V}$, $I_D=-0.7\text{A}$ $T_J=125^\circ\text{C}$		388 542	470 660	$\text{m}\Omega$
		$V_{GS}=-2.5\text{V}$, $I_D=-0.6\text{A}$		519	625	$\text{m}\Omega$
		$V_{GS}=-1.8\text{V}$, $I_D=-0.5\text{A}$		666	900	$\text{m}\Omega$
g_{FS}	Forward Transconductance	$V_{DS}=-5\text{V}$, $I_D=-0.7\text{A}$		1.7		S
V_{SD}	Diode Forward Voltage	$I_S=-0.5\text{A}$, $V_{GS}=0\text{V}$		-0.86	-1	V
I_S	Maximum Body-Diode Continuous Current				-0.4	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}$, $V_{DS}=-10\text{V}$, $f=1\text{MHz}$		114		pF
C_{oss}	Output Capacitance			17		pF
C_{rSS}	Reverse Transfer Capacitance			14		pF
R_g	Gate resistance	$V_{GS}=0\text{V}$, $V_{DS}=0\text{V}$, $f=1\text{MHz}$		12		Ω
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	$V_{GS}=-4.5\text{V}$, $V_{DS}=-10\text{V}$, $I_D=-0.7\text{A}$		1.44		nC
Q_{gs}	Gate Source Charge			0.14		nC
Q_{gd}	Gate Drain Charge			0.35		nC
$t_{D(on)}$	Turn-On Delay Time	$V_{GS}=-4.5\text{V}$, $V_{DS}=-10\text{V}$, $R_L=14.3\Omega$, $R_{GEN}=3\Omega$		6.5		ns
t_r	Turn-On Rise Time			6.5		ns
$t_{D(off)}$	Turn-Off Delay Time			18.2		ns
t_f	Turn-Off Fall Time			5.5		ns
t_{rr}	Body Diode Reverse Recovery Time	$I_F=-0.7\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$		10		ns
Q_{rr}	Body Diode Reverse Recovery Charge	$I_F=-0.7\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$		3		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The value in any a given application depends on the user's specific board design. The current rating is based on the $t \leq 10\text{s}$ thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C: The $R_{\theta JA}$ is the sum of the thermal impedance from junction to lead $R_{\theta JL}$ and lead to ambient.

D: The static characteristics in Figures 1 to 6, 12, 14 are obtained using 80 μs pulses, duty cycle 0.5% max.

E: These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The SOA curve provides a single pulse rating.

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

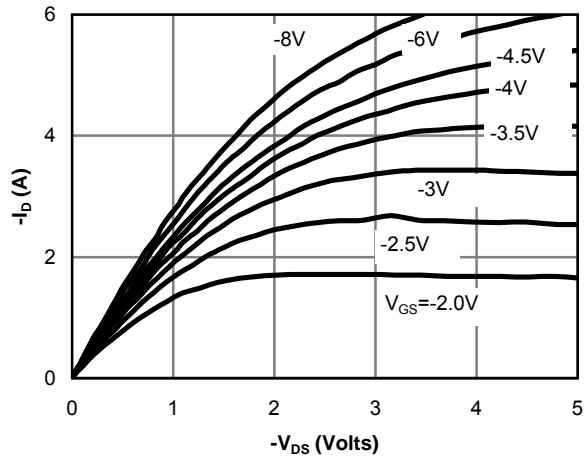


Fig 1: On-Region Characteristics

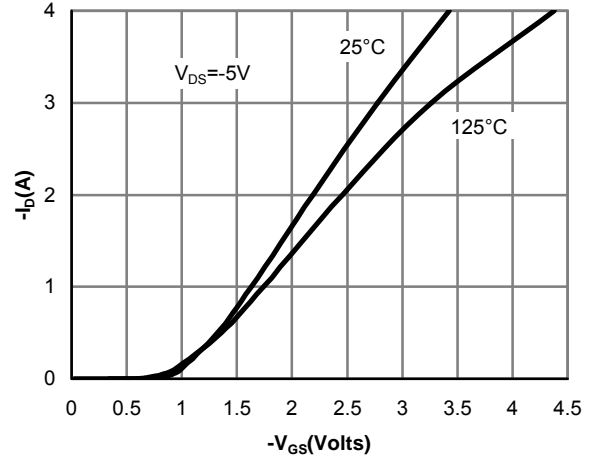


Figure 2: Transfer Characteristics

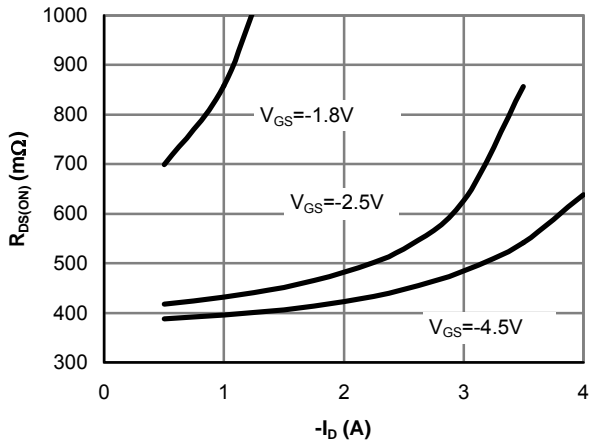


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

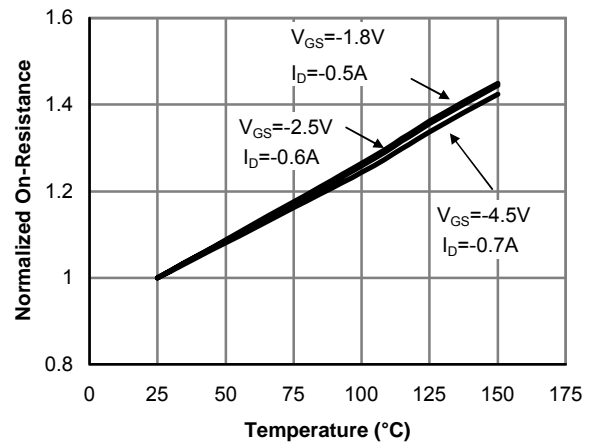


Figure 4: On-Resistance vs. Junction Temperature

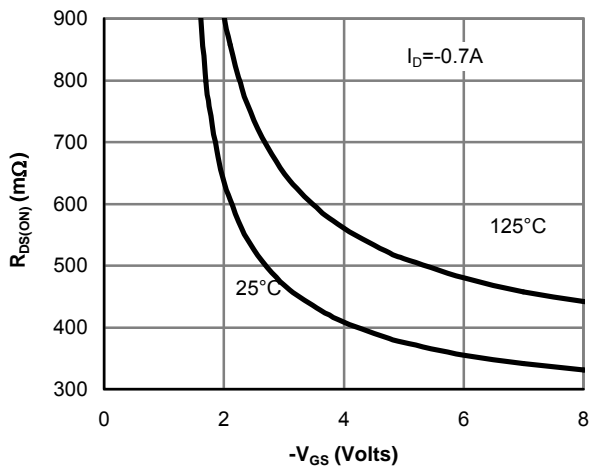


Figure 5: On-Resistance vs. Gate-Source Voltage

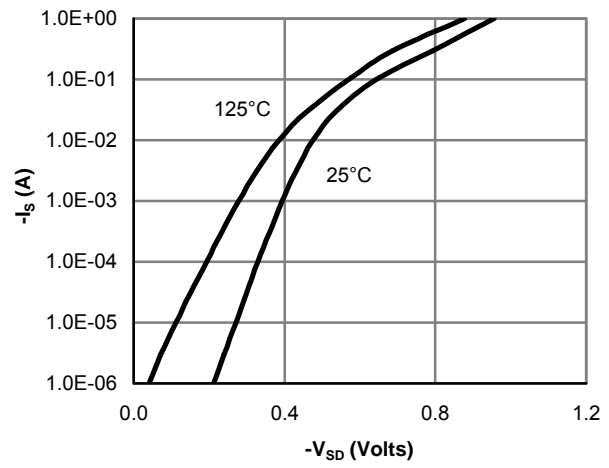


Figure 6: Body-Diode Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

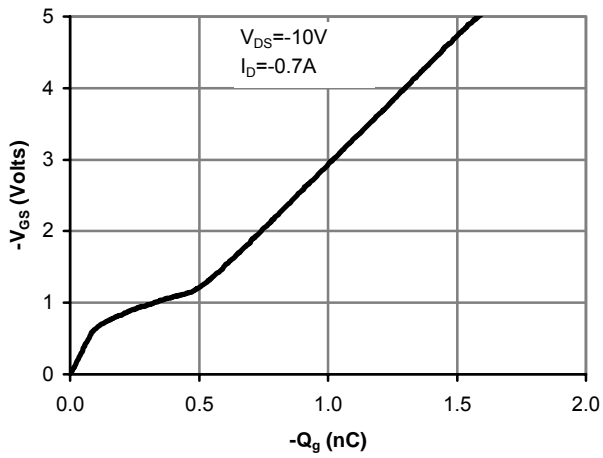


Figure 7: Gate-Charge Characteristics

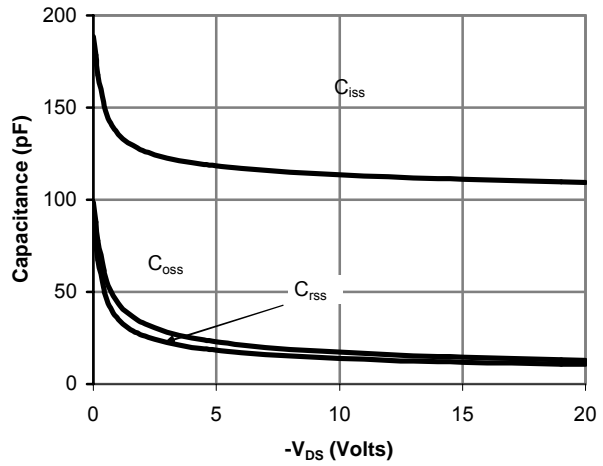


Figure 8: Capacitance Characteristics

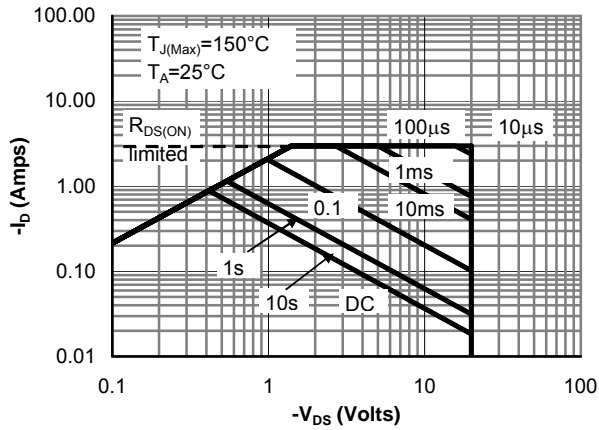


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

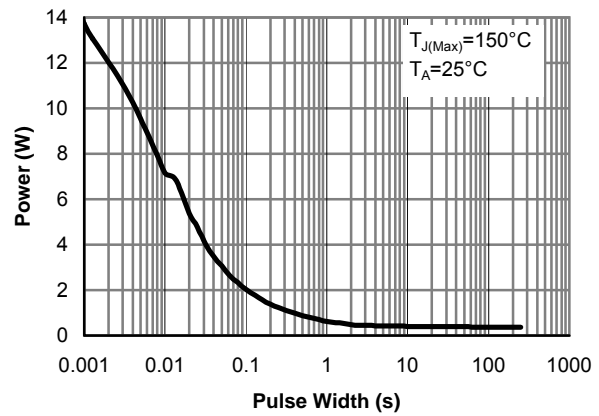


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)


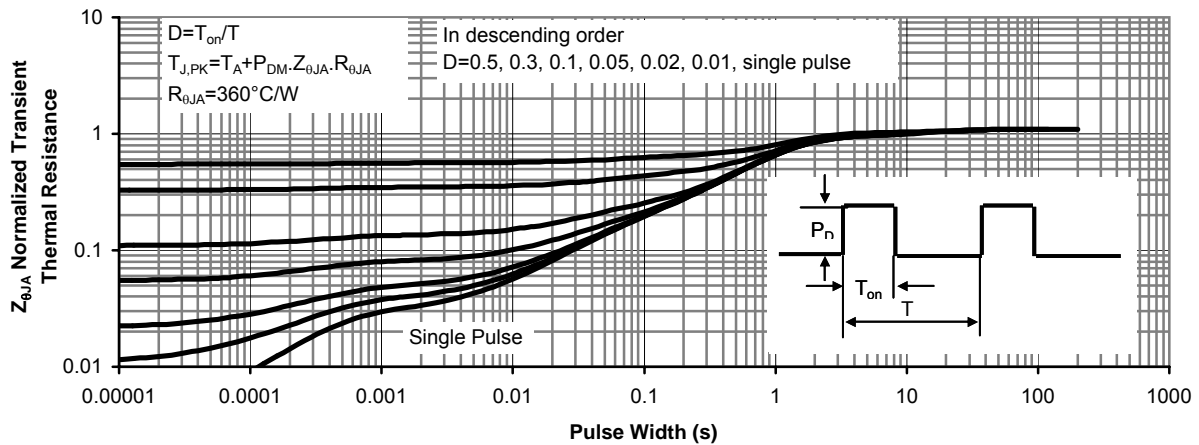



Figure 11: Normalized Maximum Transient Thermal Impedance

Document No.	PD-00128
Version	rev C
Title	AO7403 Marking Description

SC-70(3L) PACKAGE MARKING DESCRIPTION




Standard product




Green product

NOTE:
P - Product number code
N - Assembly&Foundry location code
W - Year and Week code
LT - Assembly lot code.


PART NO.	DESCRIPTION	CODE (P&N)
AO7403	Standard product	3&N
AO7403L	Green product	<u>3</u> &N

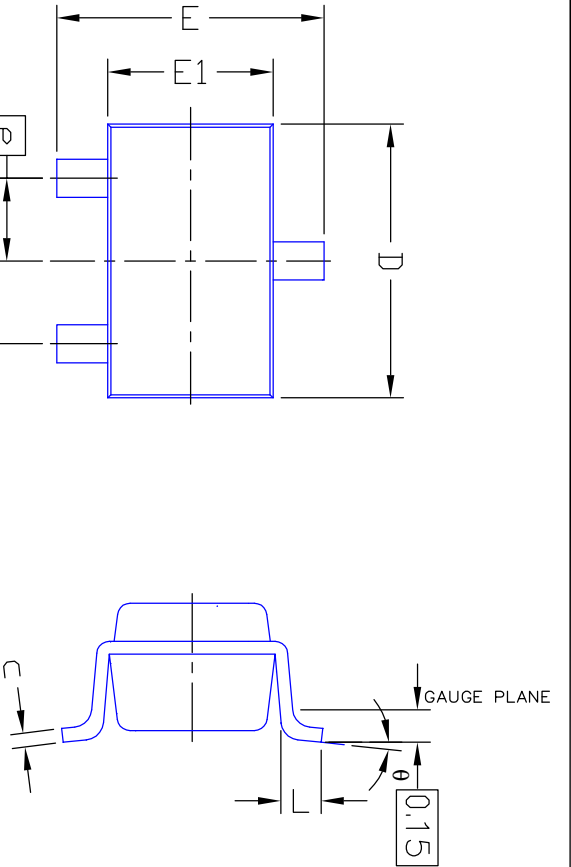

- NOTE**
1. ALL DIMENSIONS ARE IN MILLIMETERS.
 2. DIMENSIONS ARE INCLUSIVE OF PLATING.
 3. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
 4. DIE IS FACING UP FOR MOLD AND FACING DOWN FOR TRIM/FORM. i.e: REVERSE TRIM/FORM.
 5. DIMENSION L IS MEASURED IN GAUGE PLANE.
 6. CONTROLLING DIMENSION IS MILLIMETER. CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.

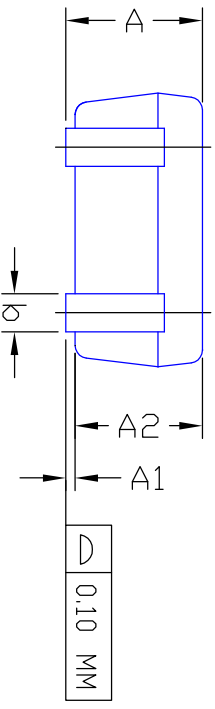

RECOMMENDATION OF LAND PATTERN

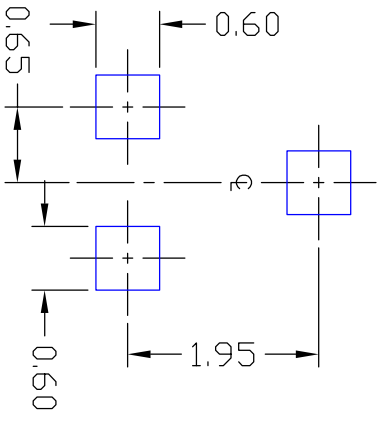


SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	---	---	1.10	---	---	0.043
A1	0.00	---	0.10	0.00	---	0.004
A2	0.7	0.9	1.00	0.028	0.035	0.039
b	0.15	---	0.30	0.006	---	0.012
c	0.08	---	0.22	0.003	---	0.009
D	1.85	2.10	2.15	0.073	0.083	0.085
E	1.80	2.30	2.40	0.071	0.091	0.094
e	0.65 BSC			0.026 BSC		
e1	1.30 BSC			0.051 BSC		
E1	1.1	1.30	1.4	0.043	0.051	0.055
L	0.26	0.36	0.46	0.010	0.014	0.018
theta	0°	4°	8°	0°	4°	8°

UNIT: mm

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMAL XX ± XXX ± XXXX ± ANGULAR ±		THIRD ANGLE PROJECTION 		 飞思卡尔(深圳)功半导体有限公司
INTERPRET DIM. AND TOL PER ASME Y14.5M - 1994 PRINTING IS SCALED TO FIT DO NOT SCALE DRAWING		Document No. PD-00012	Version rev C	
Title		SC-70-3L PACKAGE OUTLINE		


SC-70 3L Carrier Tape

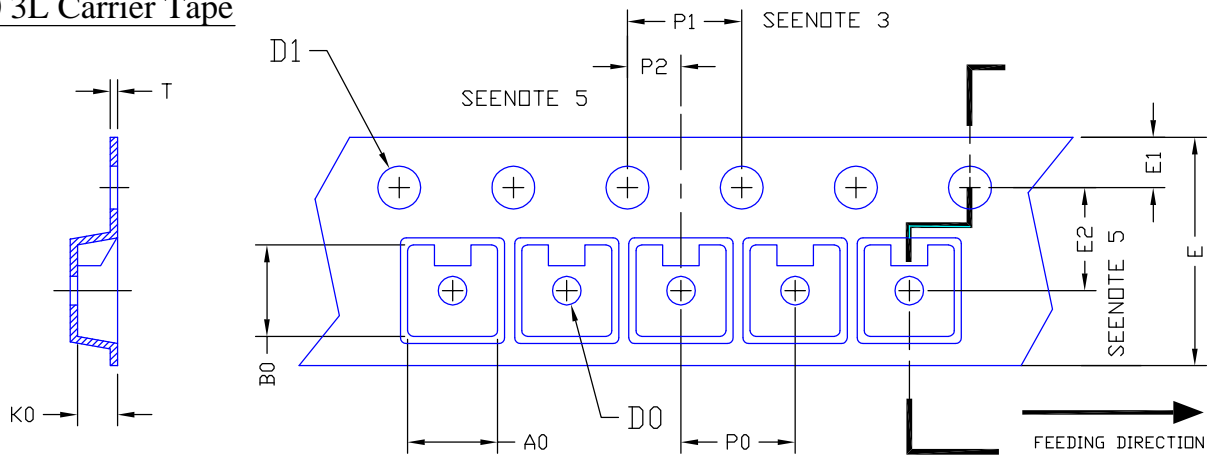

UNIT: MM

PACKAGE	A0	B0	K0	D0	D1	E	E1	E2	P0	P1	P2	T
SOT-23 (8 mm)	2.40 ±0.10	2.40 ±0.10	1.19 ±0.10	1.00 MIN	1.55 ±0.05	8.00 ±0.30	1.75 ±0.10	3.50 ±0.05	4.00 ±0.10	4.00 ±0.10	2.00 ±0.05	0.25 ±0.05

SC-70 3L Reel

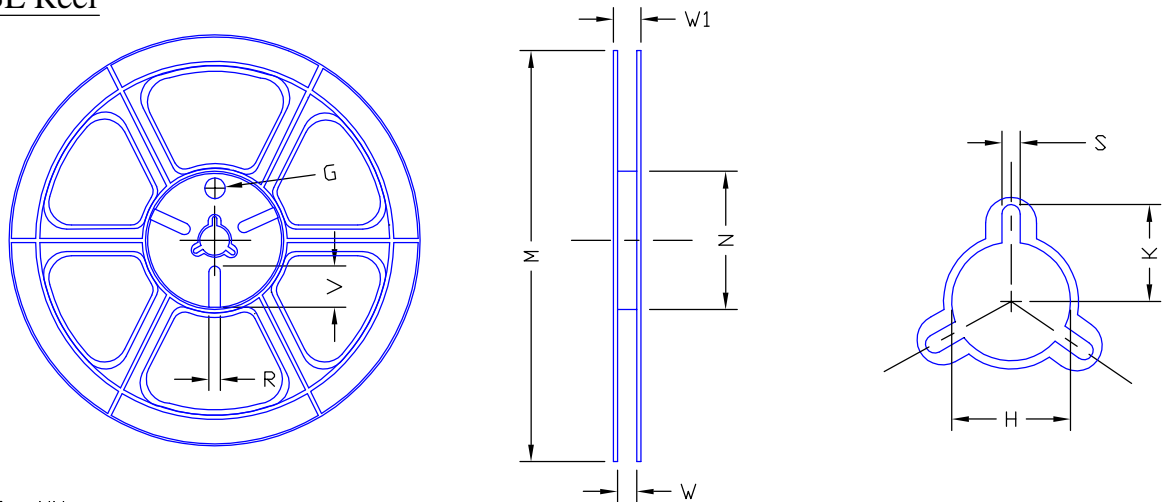

UNIT: MM

TAPE SIZE	REEL SIZE	M	N	W	W1	H	K	S	G	R	V
8 mm	ø180	ø180.00 ±0.50	ø60.50	9.00 ±0.30	11.40 ±1.00	ø13.00 +0.50 -0.20	10.60	2.00 ±0.50	ø9.00	5.00	18.00

SC-70 3L Tape

Leader / Trailer
& Orientation

