

0.8 μ A Low Power Consumption Dual Voltage Regulator

■ GENERAL DESCRIPTION

The XC6411/XC6412 series is a dual LDO regulator manufactured using CMOS process. The series achieves very low supply current 0.8 μ A typical by channel and consists of a reference voltage source, an error amplifier, a current foldback circuit, and a phase compensation circuit plus a driver transistor. The XC6411P series in SOT-25 packages, the XC6412B series in SOT-26 packages make high density mounting possible. Therefore, the series is ideally suited for applications where high density mounting is required such as mobile equipment.

Each output voltage of two regulators VR1 and VR2 is selectable in 0.1V increments within a range of 0.9V to 5.0V by laser trimming. The series is compatible with low ESR ceramic capacitors, which provides stable outputs. The VR1 and VR2 are completely isolated so that a cross talk during load fluctuation is minimized. The current limiter's foldback circuit also operates as a short protection for the output pin.


■ APPLICATIONS

- MP3 players, Portable AV equipment
- Mobile phones
- Cordless phones,
Wireless communication equipment
- Portable games
- Cameras, Video recorders
- PDAs

■ FEATURES

- Maximum Output Current** : 200mA (300mA Limit TYP.)
@ $V_{OUT}=3.0V$, $V_{IN}=4.0V$
- Dropout Voltage** : 320mV @ $I_{OUT} = 100mA$
@ $V_{OUT} = 3.0V$
- Input Voltage Range** : 1.5V ~ 6.0V
- Output Voltage Range** : 0.9V ~ 5.0V (0.1V increments)
- Highly Accurate** : $\pm 2\%$ ($1.5 < V_{OUT(T)} \leq 5.0V$)
 $\pm 0.03V$ ($0.9 < V_{OUT(T)} \leq 1.5V$)
- Low Power Consumption** : 0.8 μ A / ch. (TYP.)
- Operating Temperature Range** : - 40 ~ 85
- Low ESR Capacitor Compatible**: Ceramic capacitor
- Current Limiter Circuit Built-In**
- Small Packages** : SOT-25 (XC6411P)
: SOT-26 (XC6412B)

■ TYPICAL APPLICATION CIRCUIT

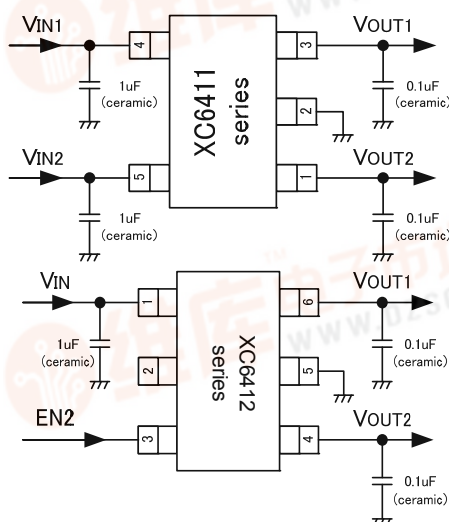


■ TYPICAL PERFORMANCE CHARACTERISTICS

- Supply Current vs. Input Voltage

VR1/VR2: 3.0V


$C_{IN}=1.0\mu F$ (ceramic), $C_L=0.1\mu F$ (ceramic)

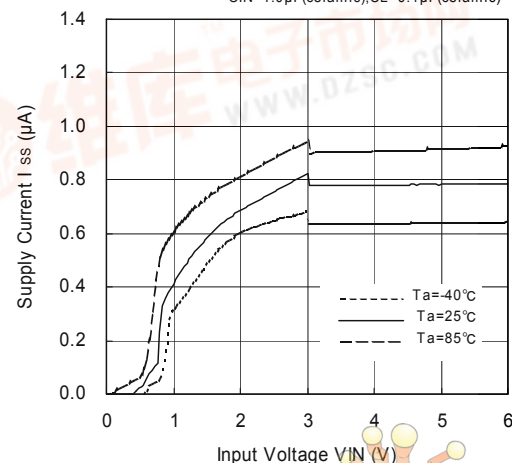

XC6411/XC6412 Series

[查询XC6412供应商](#)

■ PIN CONFIGURATION

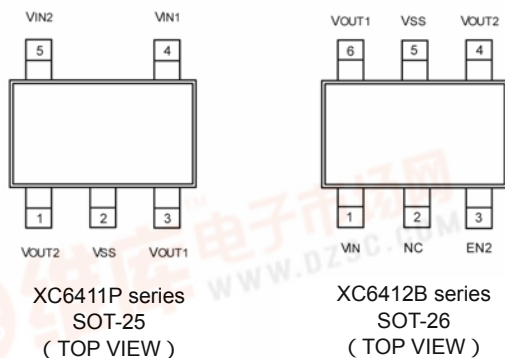

■ PIN ASSIGNMENT

PIN NUMBER		PIN NAME	FUNCTION
XC6411	XC6412B (SOT-26)		
1	4	VOUT2	Output 2
2	5	VSS	Ground
3	6	VOUT1	Output 1
-	1	VIN	Power Input
4	-	VIN1	Power Input 1
5	-	VIN2	Power Input 2
-	3	EN2	ON / Off Switch (ch. 2)
-	2	NC	No Connection

* When using an SOT-26 package for the XC6412B series, please note that No. 1 pin is common input voltage.

■ PRODUCT CLASSIFICATION

● Ordering Information

XC6411P

XC6412B


DESIGNATOR	DESCRIPTION	SYMBOL	DESCRIPTION
	Output Voltage	001~	: Serial number for VR1 and VR2 voltage combination Factory set range: 0.9~5.0V (0.1V increments)
	Package	M	: SOT-25 (XC6411P)
			: SOT-26 (XC6412B)
	Device Orientation	R	: Embossed tape, standard feed
		L	: Embossed tape, reverse feed

[查询XC6412供应商](#)

■ BLOCK DIAGRAMS

● XC6411P Series

● XC6412B Series (SOT-26)

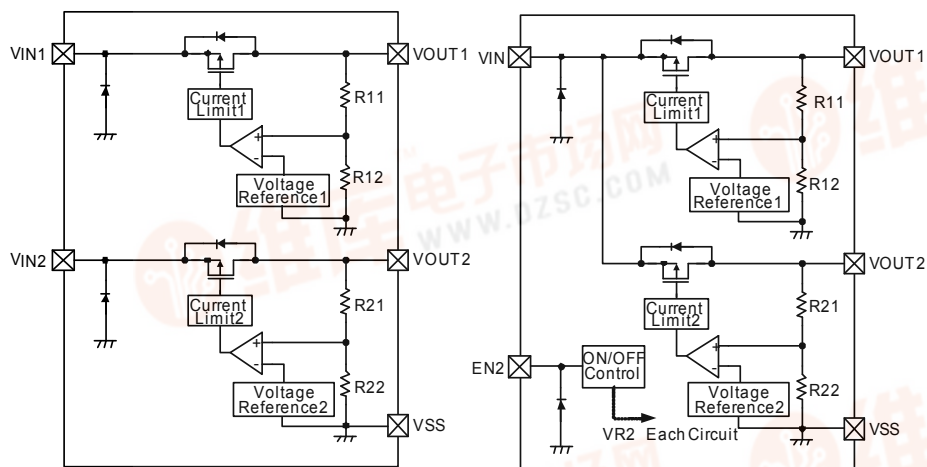

* Diodes shown in the above circuit are ESD protection diodes and parasitic diodes.

■ ABSOLUTE MAXIMUM RATINGS

Ta = 25

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		VIN	- 0.3 ~ + 7.0	V
Input Voltage 1		VIN1	- 0.3 ~ + 7.0	V
Input Voltage 2		VIN2	- 0.3 ~ + 7.0	V
Output Current 1		IOUT1	500 (*1)	mA
Output Current 2		IOUT2	500 (*1)	mA
Output Voltage 1		VOUT1	VSS - 0.3 ~ VIN + 0.3	V
Output Voltage 2		VOUT2	VSS - 0.3 ~ VIN + 0.3	V
EN2 Pin Voltage		VEN2	VSS - 0.3 ~ 0.7	V
Power Dissipation	SOT-25	Pd	250	mW
	SOT-26			
Operating Temperature Range		Topr	- 40 ~ + 85	
Storage Temperature Range		Tstg	- 55 ~ +125	

Note: *1: Please use the XC6411P (SOT-25) series with following to the equation;

$$Pd > [(VIN1 - VOUT1) \times IOUT1 + (VIN2 - VOUT2) \times IOUT2]$$

Please use the XC6412B (SOT-26) series with following to the equation;

$$Pd > [(VIN - VOUT1) \times IOUT1 + (VIN - VOUT2) \times IOUT2]$$

XC6411/XC6412 Series

[查询XC6412供应商](#)

■ ELECTRICAL CHARACTERISTICS

XC6411P/XC6412 Series, Regulator 1 and Regulator 2

Ta = 25

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage (*2)	VOUT(E)	VIN=VOUT(T) (*1) + 1.0V, IOUT=1mA	E-0 (*6)			V	
Maximum Output Current	IOUTMAX	VIN=VOUT(T) + 1.0V VOUT(T)=0.9V	50	70	-	mA	
		VIN=VOUT(T) + 1.0V VOUT(T)=1.0V ~ 1.1V	60	80	-		
		VIN=VOUT(T) + 1.0V VOUT(T)=1.2V ~ 1.3V	80	110	-		
		VIN=VOUT(T) + 1.0V VOUT(T)=1.4V ~ 1.6V	100	140	-		
		VIN=VOUT(T) + 1.0V VOUT(T)=1.7V ~ 2.2V	120	150	-		
		VIN=VOUT(T) + 1.0V VOUT(T)=2.3V ~ 2.9V	150	195	-		
		VIN=VOUT(T) + 1.0V VOUT(T) 3.0V	200	300	-		
Load Regulation	ΔVOUT	VIN=VOUT(T) + 1.0V, VOUT(T) = 0.9V 1mA IOUT 50mA	-	15	70	mV	①
		VIN=VOUT(T) + 1.0V VOUT(T)=1.0V ~ 1.1V 1mA IOUT 60mA					
		VIN=VOUT(T) + 1.0V VOUT(T)=1.2V~1.3V 1mA IOUT 80mA					
		VIN=VOUT(T) + 1.0V VOUT(T) 1.4V 1mA IOUT 100mA					
Dropout Voltage (*3)	Vdif	VOUT(T)=0.9V, IOUT =50mA	E-1(*6)			mV	①
		VOUT(T)=1.0V ~ 1.1V, IOUT =60mA					
		VOUT(T)=1.2V ~ 1.3V, IOUT =80mA					
		VOUT(T) 1.4V, IOUT =100mA					
Line Regulation	ΔVOUT / ΔVIN . VOUT	VOUT(T)=0.9V, 1.5V VIN 6.0V, IOUT =1mA	-	0.05	0.15	%V	
		VOUT(T)=1.0V~1.2V, VOUT(T)+0.5V VIN 6.0V IOUT =1mA					
		VOUT(T) 1.3V, VOUT(T)+0.5V VIN 6.0V IOUT =30mA					
Input Voltage	VIN	-	1.5	-	6.0	V	-
Output Voltage Temperature Characteristics	ΔVOUT / ΔTopr . VOUT	VIN= VOUT(T)+1.0V, IOUT =30mA, - 40 < Topr < 85	-	± 100	-	ppm /	

[查询XC6412供应商](#)

■ ELECTRICAL CHARACTERISTICS (Continued)

XC6411P/XC6412 Series, Regulator 1 and Regulator 2 (Continued)

Ta = 25

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Current Limit	ILIM	$V_{OUT}=V_{OUT(E)} \times 0.95$ $V_{OUT(T)}=0.9V$ $V_{IN}=V_{OUT(T)}+2.0V$	100	300	-	mA	
		$V_{OUT}=V_{OUT(E)} \times 0.95$ $V_{OUT(T)}=1.0V \sim 1.1V$ $V_{IN}=V_{OUT(T)}+2.0V$	120	300	-		
		$V_{OUT}=V_{OUT(E)} \times 0.95$ $V_{OUT(T)}=1.2V \sim 1.3V$ $V_{IN}=V_{OUT(T)}+2.0V$	160	300	-		
		$V_{OUT}=V_{OUT(E)} \times 0.95$ $V_{OUT(T)}=1.4V \sim 2.9V$ $V_{IN}=V_{OUT(T)}+2.0V$	200	300	-		
		$V_{OUT}=V_{OUT(E)} \times 0.95$ $V_{OUT(T)}=3.0V$ $V_{IN}=V_{OUT(T)}+1.0V$	200	300	-		
Short Circuit Current	Ishort	$V_{IN}=V_{OUT(T)}+1.0V$, $V_{OUT}=0V$	-	50	-	mA	

NOTE: *1: $V_{OUT(T)}$: Setting output voltage*2: $V_{OUT(E)}$ = Effective output voltage(i.e. the output voltage when " $V_{OUT(T)} + 1.0V$ " is provided at the VIN pin while maintaining a certain IOUT value).*3: $V_{dif} = \{V_{IN0}^{(*)} - V_{OUT0}^{(*)}\}$ *4: V_{IN0} = The input voltage when V_{OUT0} appears as input voltage is gradually decreased.*5: V_{OUT0} = A voltage equal to 98% of the output voltage whenever an amply stabilized IOUT { $V_{OUT(T)} + 1.0V$ } is input.

*6: Refer to "VOLTAGE CHART".

*7: Unless otherwise stated, $V_{EN2}=V_{IN}$ for the XC6412 series.*8: When the series are the XC6411P and XC6412C series, "VIN" shown in the conditions represents V_{IN1} or V_{IN2} .

■ ELECTRICAL CHARACTERISTICS (Continued)

XC6411P Series: Regulator 1, Regulator 2 (each channel)

Ta = 25

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Supply Current	IDD	VIN=VOUT(T) + 1.0V VOUT(T) 3.9V	-	0.8	1.5	μA	②
		VIN=VOUT(T) + 1.0V VOUT(T) 4.0V	-	1.0	1.8	μA	②

XC6412B Series (SOT-26)

Ta = 25

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Supply Current 2 (*8)	IDD2	VIN=VOUT(T) + 1.0V, VEN2=VIN VOUT(T) 3.9V	-	1.6	3.0	μA	②
		VIN=VOUT(T) + 1.0V, VEN2=VIN VOUT(T) 4.0V	-	2.0	3.6	μA	②
Supply Current 3 (*9)	IDD3	VIN=VOUT(T) + 1.0V, VEN2=VIN VOUT(T) 3.9V	-	0.8	1.6	μA	②
		VIN=VOUT(T) + 1.0V, VEN2=VIN VOUT(T) 4.0V	-	1.0	1.9	μA	②
EN 'H' Level Voltage	VENH	VIN=VOUT(T)+1.0V	1.0	-	6.0	V	
EN 'L' Level Voltage	VENL	VIN=VOUT(T)+1.0V	-	-	0.3	V	
EN 'H' Level Current	IENH	VIN=VOUT(T)+1.0V, VEN2=VIN	- 0.1	-	0.1	μA	
EN 'L' Level Current	IENL	VIN=VOUT(T)+1.0V, VEN2=VIN	- 0.1	-	0.1	μA	

NOTE:

*8: Supply current of the IC: (VR1 supply current + VR2 supply current)

*9: Supply current of the IC when VR2 is in stand-by mode: (VR1 supply current + VR2 stand-by current)


[查询XC6412供应商](#)

■ ELECTRICAL CHARACTERISTICS (Continued)

● Voltage Chart

Ta = 25


PARAMETER	E-0		E-1	
	OUTPUT VOLTAGE (V)		DROPOUT VOLTAGE 1 (mV)	
SETTING OUTPUT VOLTAGE	VOUT		Vdif	
VOUT(T)	MIN.	MAX.	TYP.	MAX.
0.9	0.870	0.930	870	1000
1.0	0.970	1.030	860	1000
1.1	1.070	1.130	780	950
1.2	1.170	1.230	800	1000
1.3	1.270	1.330	720	900
1.4	1.370	1.430	750	960
1.5	1.470	1.530	700	890
1.6	1.568	1.632	680	860
1.7	1.666	1.734	650	830
1.8	1.764	1.836	630	800
1.9	1.862	1.938	610	780
2.0	1.960	2.040	580	740
2.1	2.058	2.142	580	740
2.2	2.156	2.244	580	740
2.3	2.254	2.346	510	650
2.4	2.352	2.448	510	650
2.5	2.450	2.550	450	580
2.6	2.548	2.652	450	580
2.7	2.646	2.754	450	580
2.8	2.744	2.856	450	580
2.9	2.842	2.958	450	580
3.0	2.940	3.060	320	420
3.1	3.038	3.162	320	420
3.2	3.136	3.264	320	420
3.3	3.234	3.366	320	420
3.4	3.332	3.468	320	420
3.5	3.430	3.570	320	420
3.6	3.528	3.672	320	420
3.7	3.626	3.774	320	420
3.8	3.724	3.876	320	420
3.9	3.822	3.978	320	420
4.0	3.920	4.080	290	380
4.1	4.018	4.182	290	380
4.2	4.116	4.284	290	380
4.3	4.214	4.386	290	380
4.4	4.312	4.488	290	380
4.5	4.410	4.590	290	380
4.6	4.508	4.692	290	380
4.7	4.606	4.794	290	380
4.8	4.704	4.896	290	380
4.9	4.802	4.998	290	380
5.0	4.900	5.100	230	310

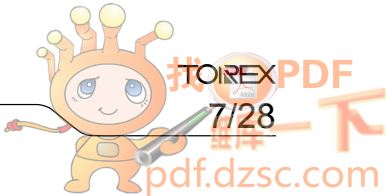


■ TEST CIRCUITS

● XC6411 Series

Circuit

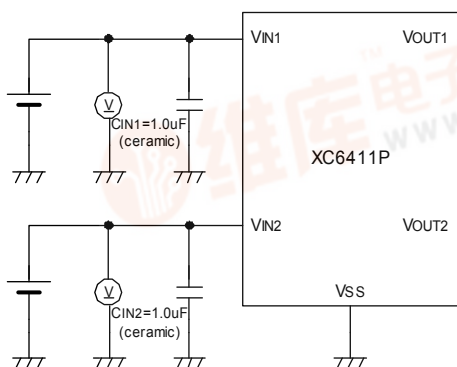


Circuit

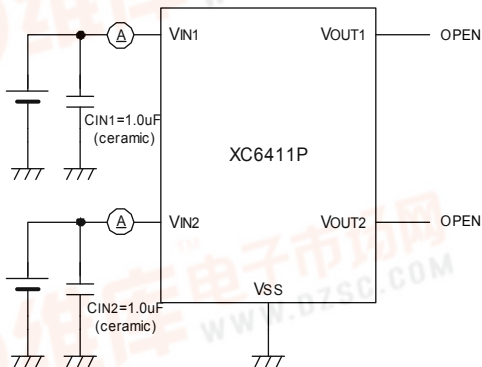


● XC6412B Series (SOT-26)

Circuit

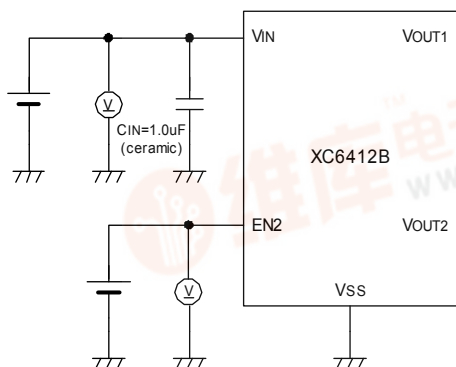

Circuit

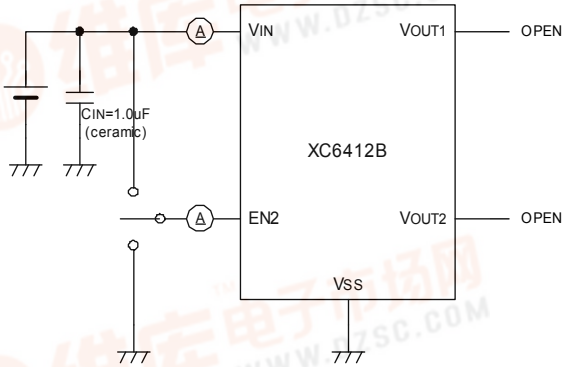


[查询XC6412供应商](#)

■ OPERATIONAL EXPLANATION

<Output Voltage Control>

The voltage, divided by resistors R11 & R12 for a regulator 1 and R21 & R22 for a regulator 2 is compared with the internal reference voltage by the error amplifier. These resistors are connected to the VOUT pin. The P-channel MOSFET connected to the VOUT pin is then driven by the subsequent output signal. The output voltage at the VOUT pin is controlled and stabilized by a system of negative feedback. The current limit circuit operates when the load current reaches the current limit level.

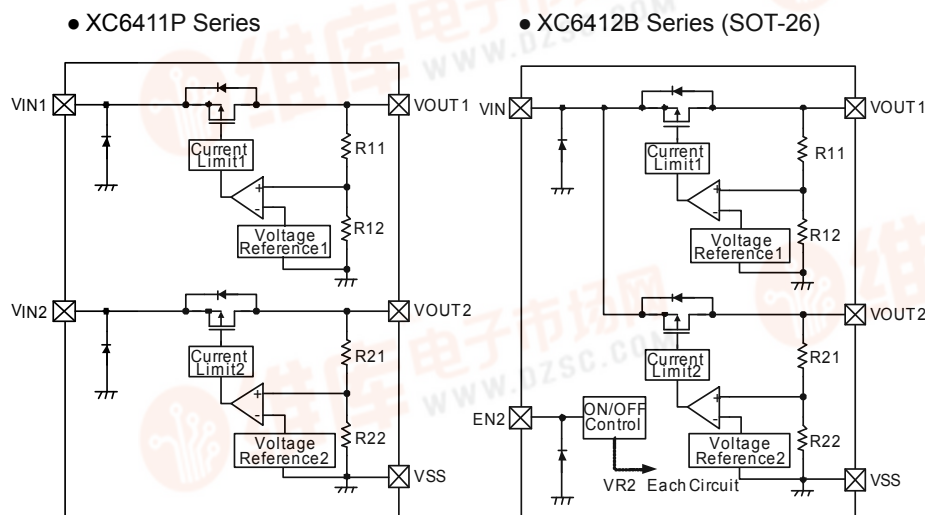

* Diodes shown in the above circuit are ESD protection diodes and parasitic diodes.

<Dual Inputs>

In the XC6411P series, the two input voltage pins are separated. The two regulators 1 and 2 can operate independently so that it offers design flexibility.

<Short Protection Circuit>

The XC6411P/6412 series' regulator offers short-circuit protection by means of a built-in foldback circuit. When the load current reaches the current limit level, the fixed current limiter circuit operates and output voltage drops. As a result of this drop in output voltage, the foldback circuit operates, the output voltage drops further and output current decreases. When the output voltage pin is shorted, a current of about 50mA flows.

<EN2 Pin>

The regulator 2's internal circuitry can be operated or shutdown via the signal from the EN2 pin with the XC6412 series. In so doing the regulator 1 maintains an operational state constantly. In shutdown mode, output at the VOUT2 pin will be pulled down to the Vss level via R21 & R22. Note that the XC6412 series' regulator is "High Active/No Pull-Down", operations will become unstable with the EN2 pin open. We suggest that you use this IC with either a VIN voltage or a Vss voltage input at the EN2 pin. If this IC is used with the correct specifications for the EN pin, the operational logic is fixed and the IC will operate normally. However, supply current may increase as a result of through current in the IC's internal circuitry.

■ NOTES ON USE

1. Please use this IC within the stated absolute maximum ratings. The IC is liable to malfunction should the ratings be exceeded.
2. Where wiring impedance is high, operations may become unstable due to noise and/or phase lag depending on output current.
3. As for the XC6412 series, internally achieved phase compensation makes a stable operation of the IC possible even when there is no output capacitor (CL). In order to stabilize the VIN's voltage level, we recommend that an input capacitor (CIN) of about 0.1 to 1.0 μ F be connected between each VIN pin and the Vss pin. Moreover, during transient response, so as to prevent an undershoot or overshoot, we recommend that the output capacitor (CL) of about 0.1 to 1.0 μ F be connected between each VOUT pin and the Vss pin. However, please wire the input capacitor (CIN) and the output capacitor (CL) as close to the IC as possible.







XC6411/XC6412 Series

[查询XC6412供应商](#)

■ TYPICAL PERFORMANCE CHARACTERISTICS

● XC6411P/6412 Series



(1) Output Voltage vs. Output Current

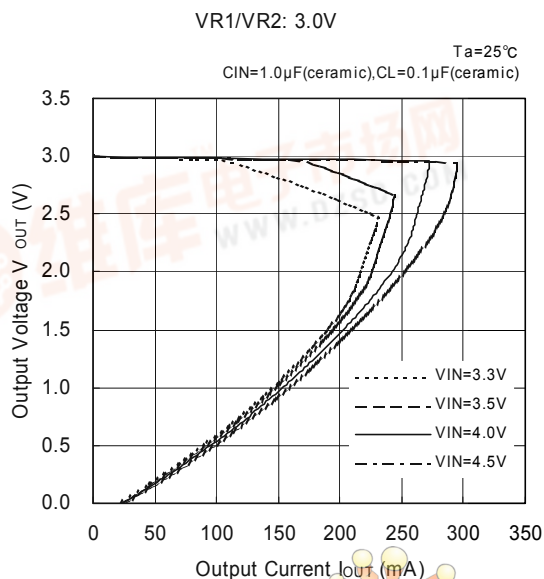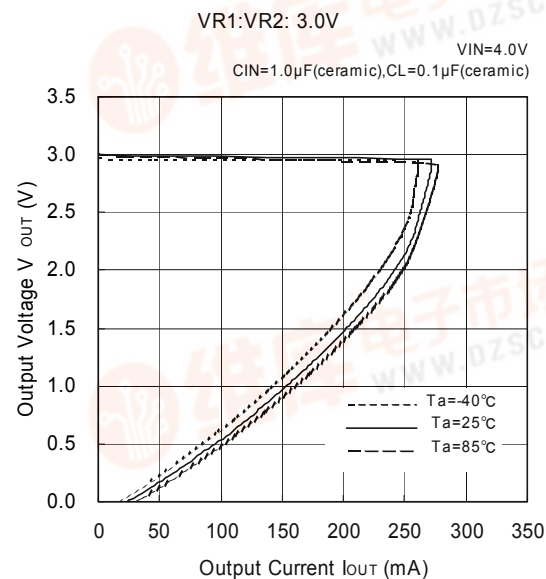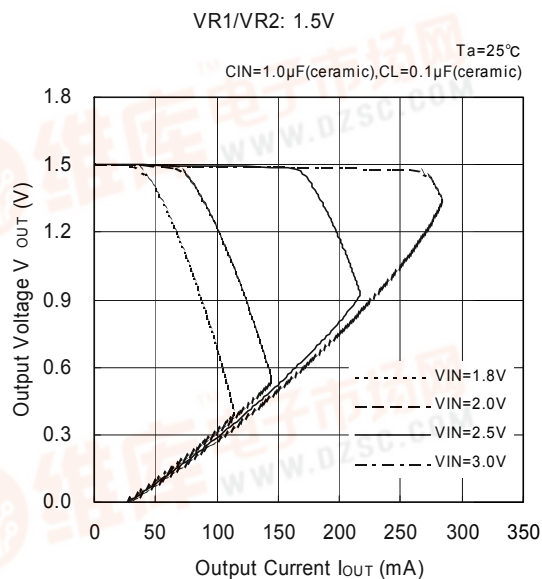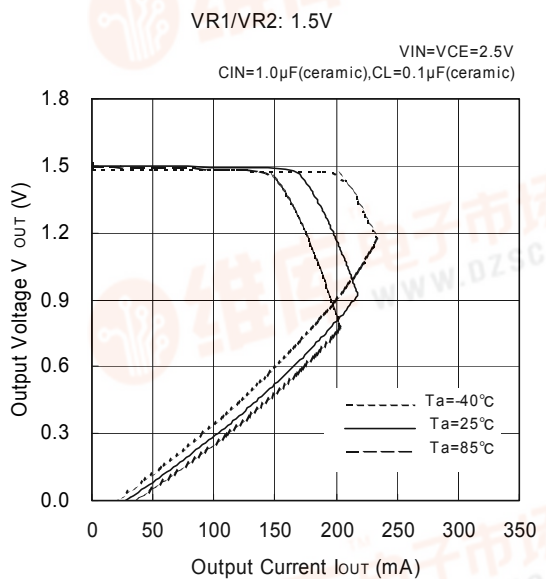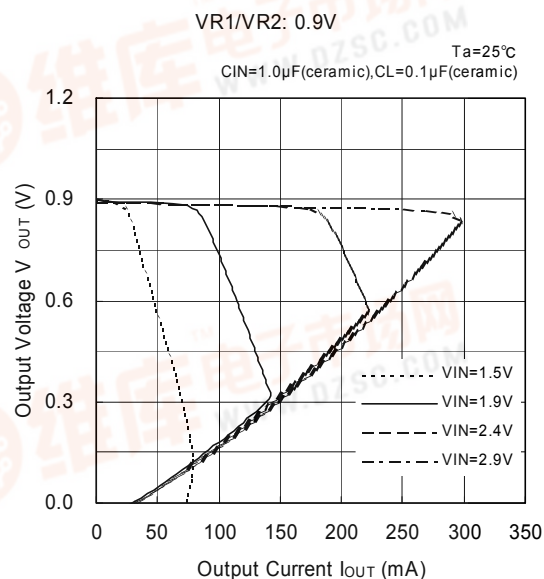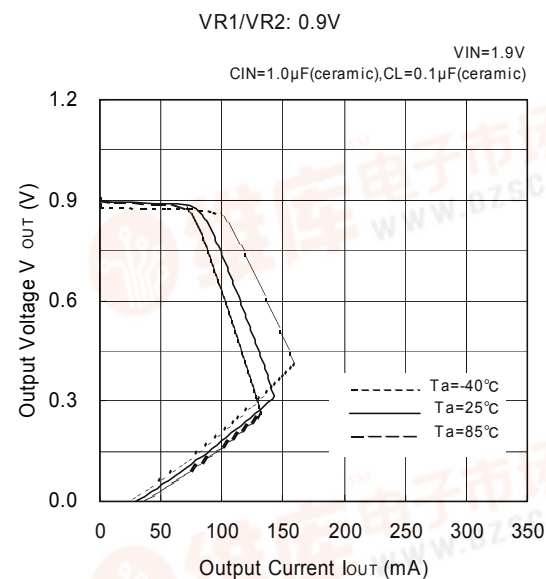





[查询XC6412供应商](#)

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(1) Output Voltage vs. Output Current (Continued)

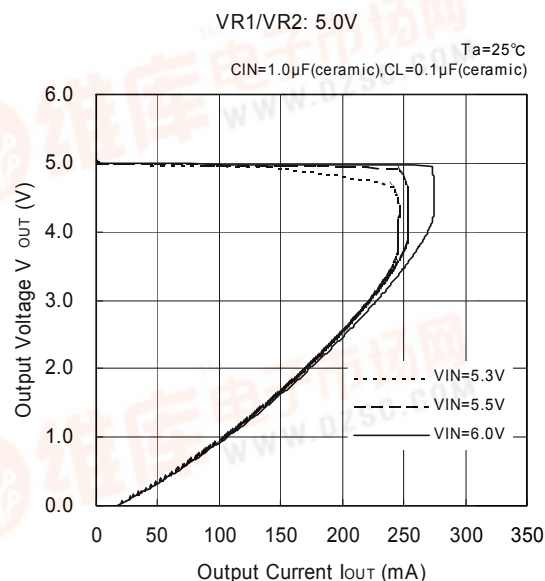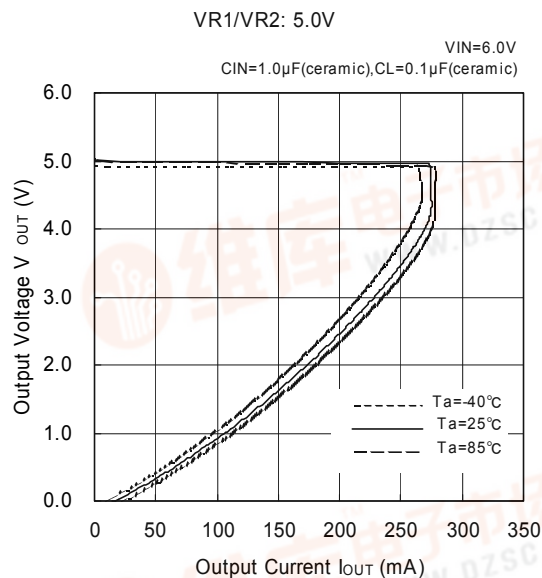


(2) Output Voltage vs. Input Voltage

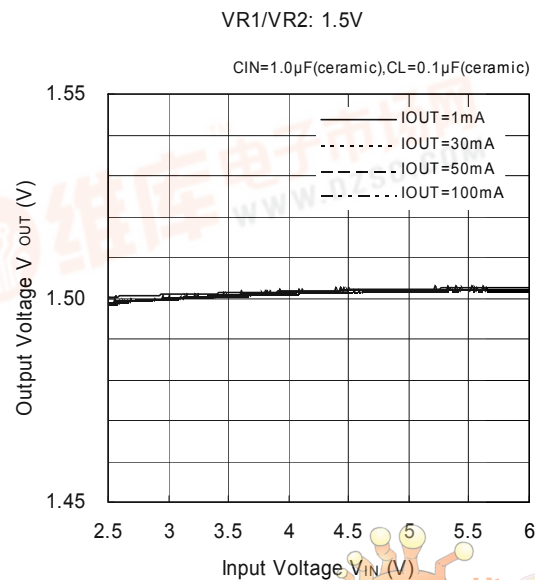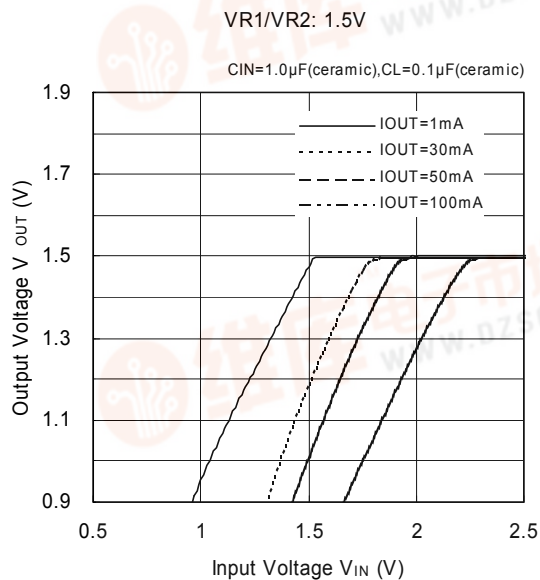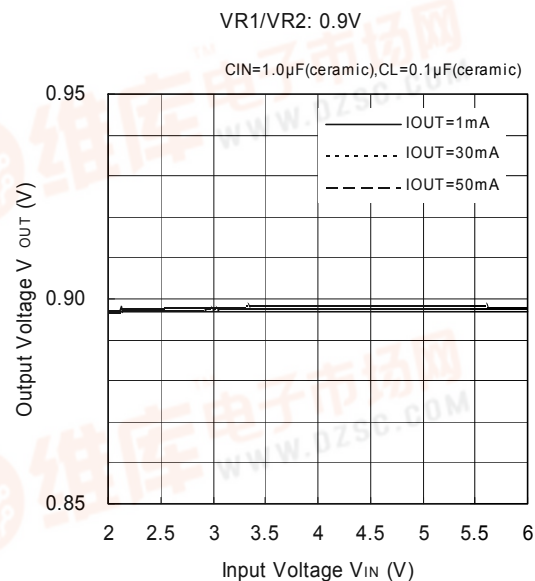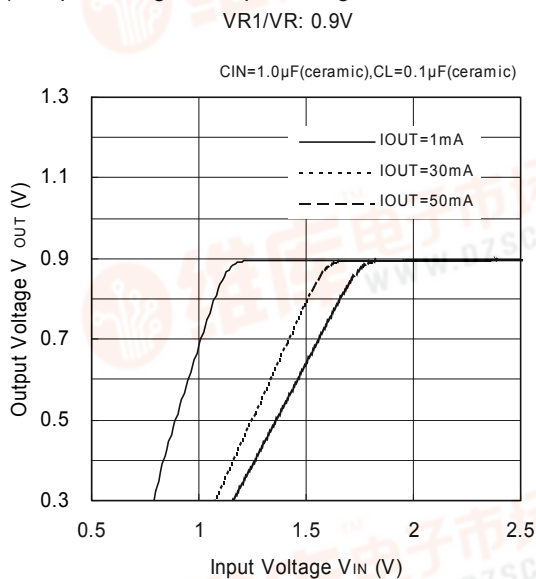




■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(2) Output Voltage vs. Input Voltage (Continued)

VR1/VR2: 3.0V

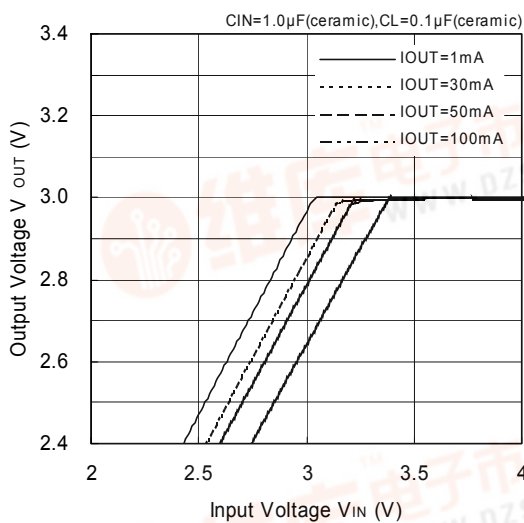


VR1/VR2: 3.0V

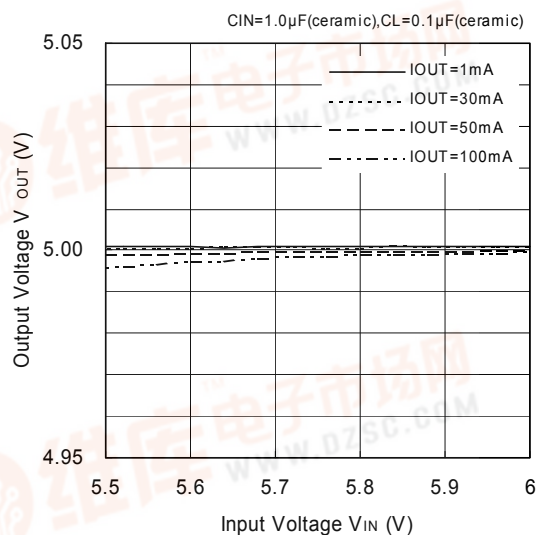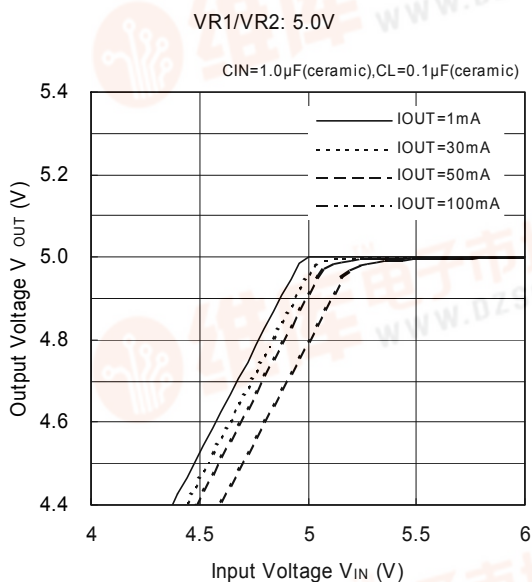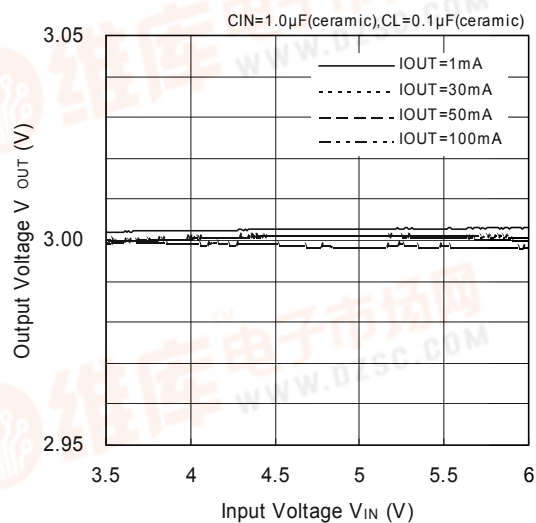


(3) Dropout Voltage vs. Output Current

VR1/VR2: 0.9V

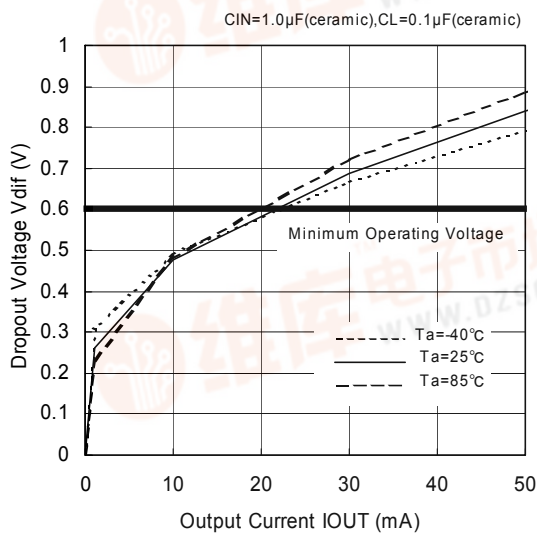

VR1/VR2: 1.5V

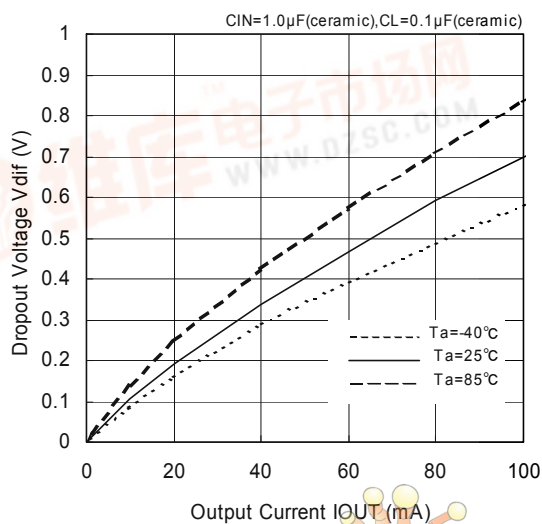


[查询XC6412供应商](#)


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(3) Dropout Voltage vs. Output Current (Continued)

VR1/VR2: 3.0V

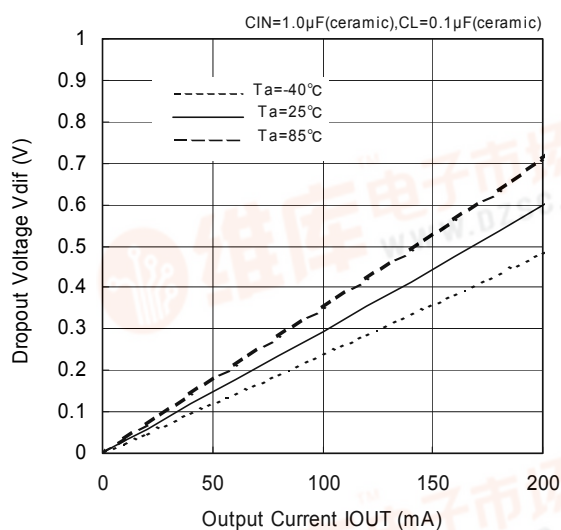


VR1/VR2: 5.0V

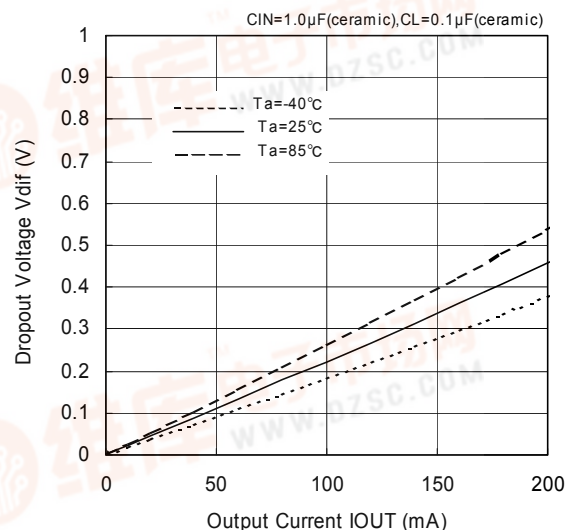


(4) Supply Current vs. Input Voltage


VR1/VR2: 0.9V

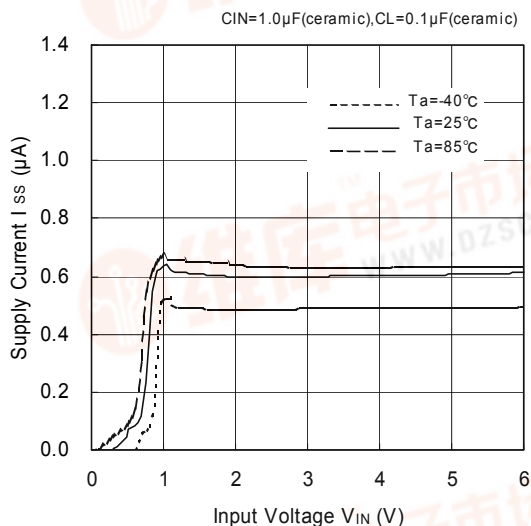


VR1/VR2: 1.5V

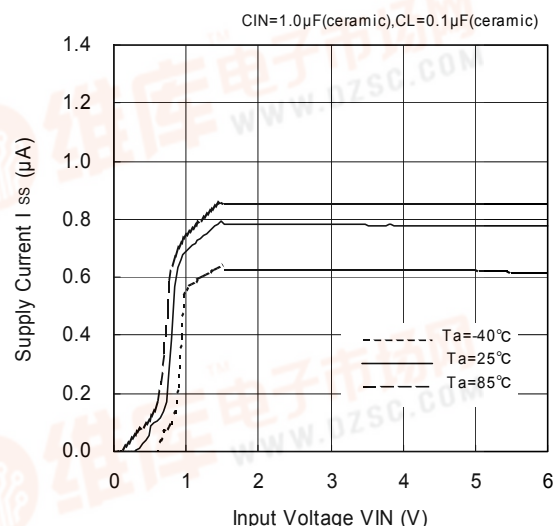

VR1/VR2: 3.0V

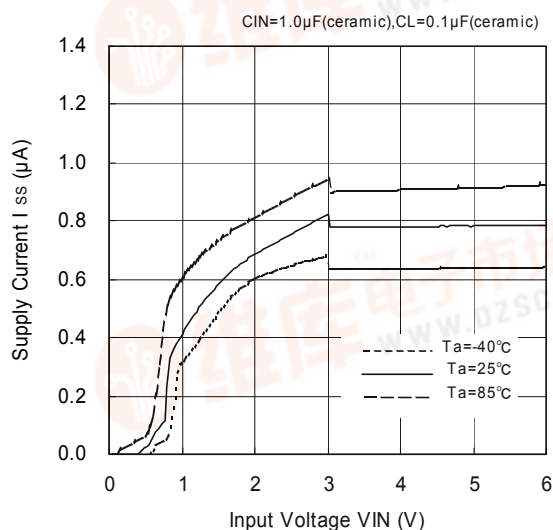


VR1/VR2: 5.0V

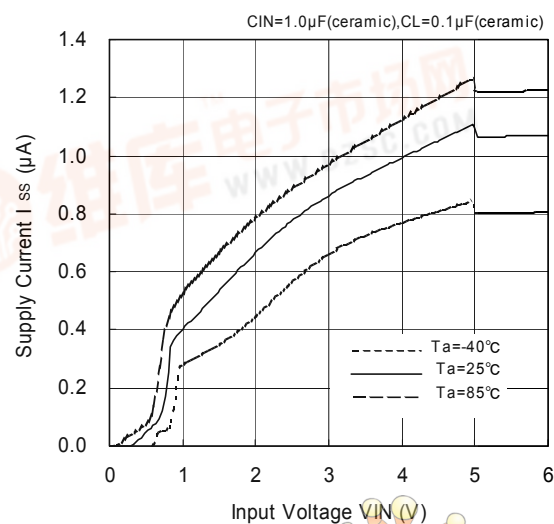


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(5) Output Voltage vs. Ambient Temperature


VR1/VR2: 0.9V

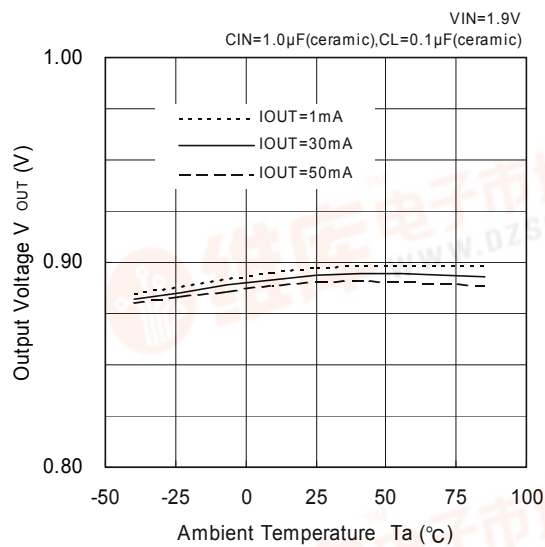


VR1/VR2: 1.5V

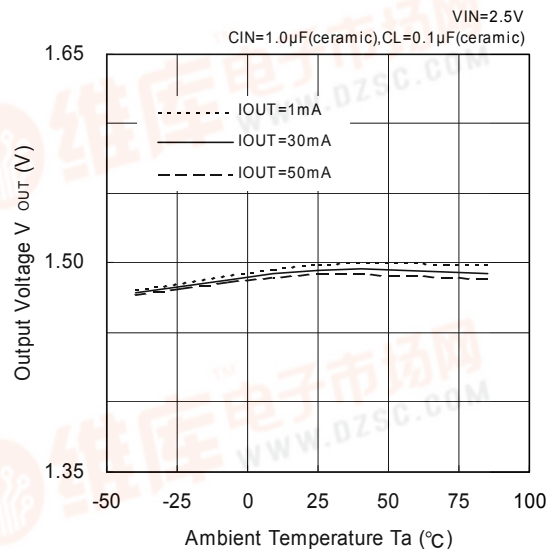

VR1/VR2: 3.0V

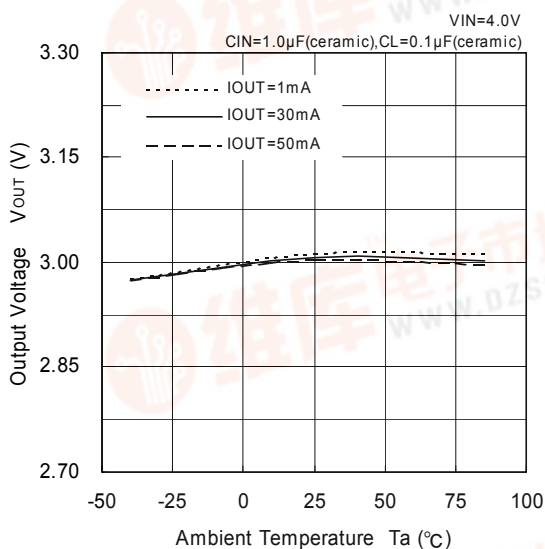


VIN=6.0V

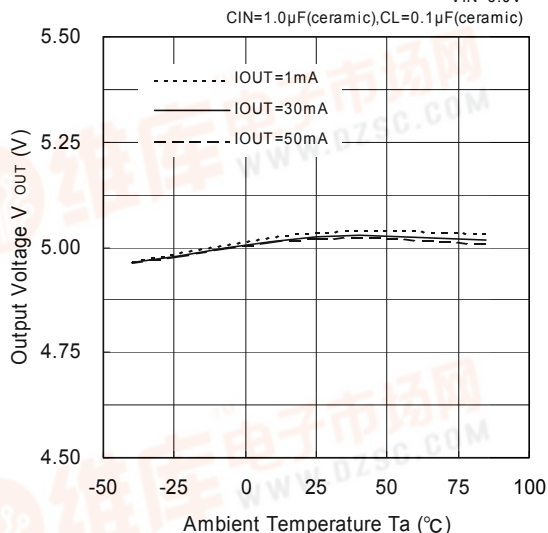


(6) Supply Current vs. Ambient Temperature

VR1/VR2: 0.9V

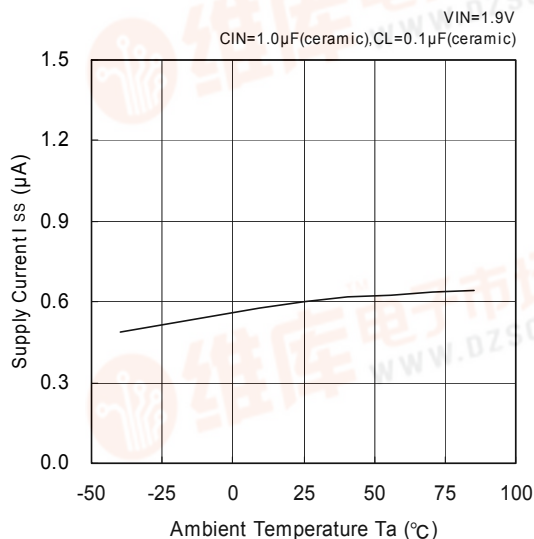

VR1/VR2: 1.5V

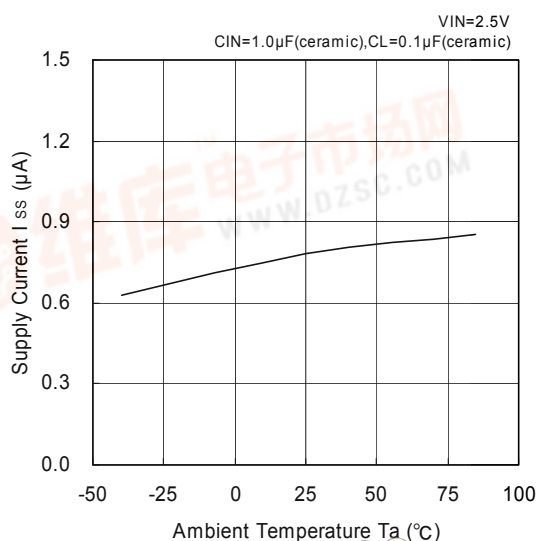


[查询XC6412供应商](#)


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(6) Supply Current vs. Ambient Temperature (Continued)

VR1/VR2: 3.0V

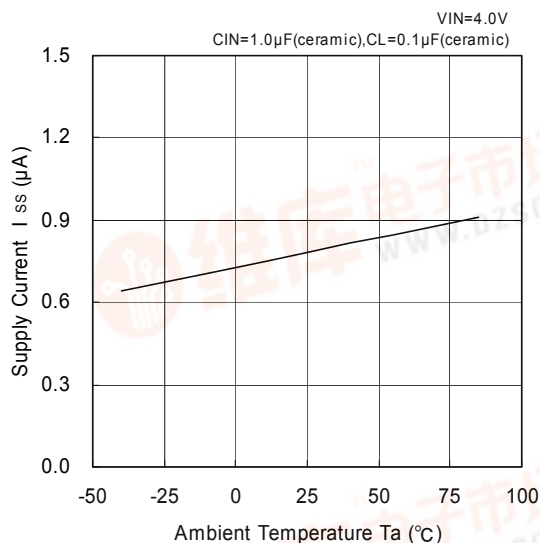


VR1/VR2: 5.0V

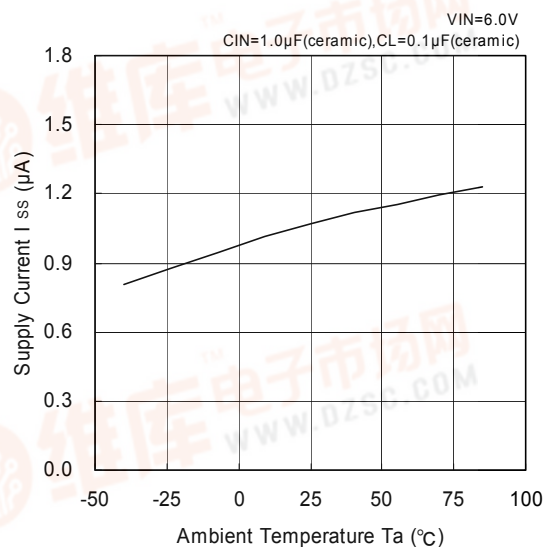


(7) EN2 Threshold Voltage vs. Ambient Temperature (XC6412 series)


XC6412B (VR2: 0.9V)

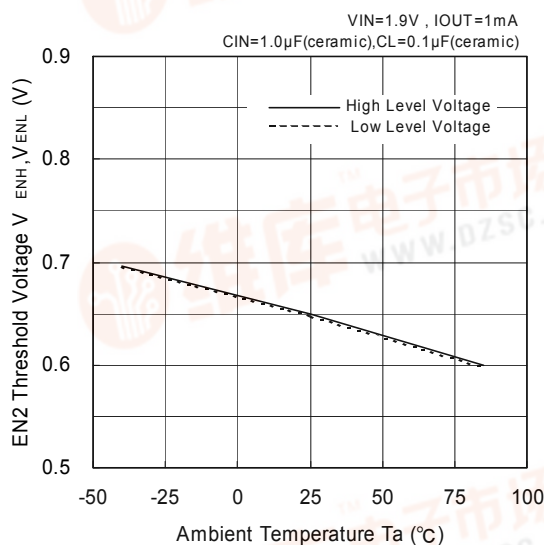


XC6412B (VR2: 1.5V)

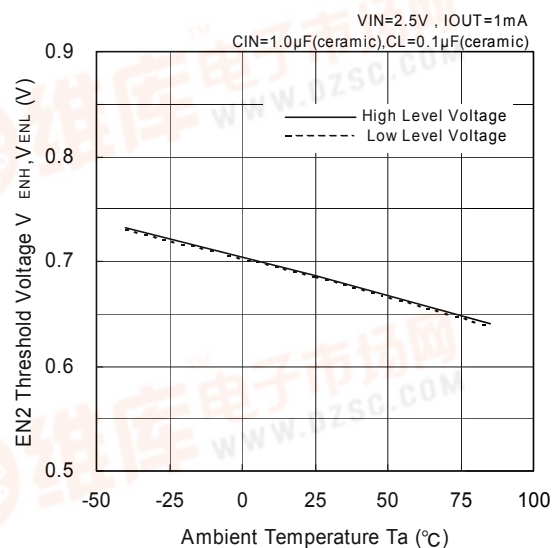

XC6412B (VR2: 3.0V)






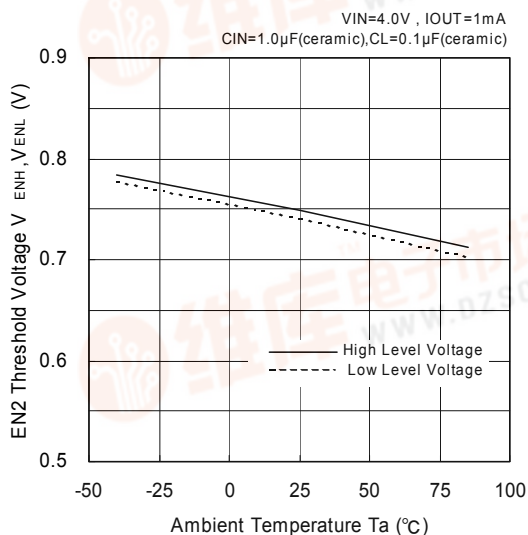


XC6412B (VR2: 5.0V)

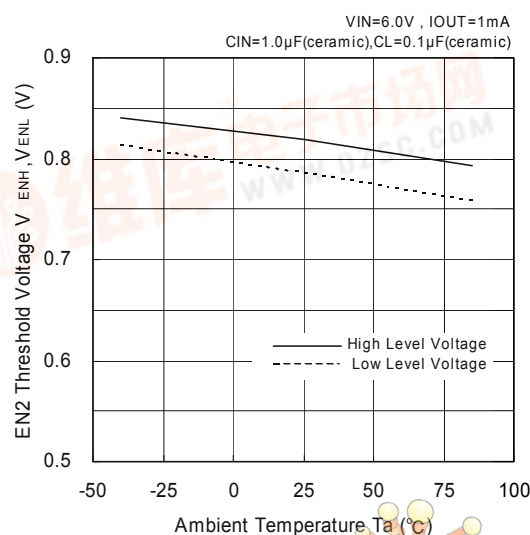

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)







(8) Input Transient Response

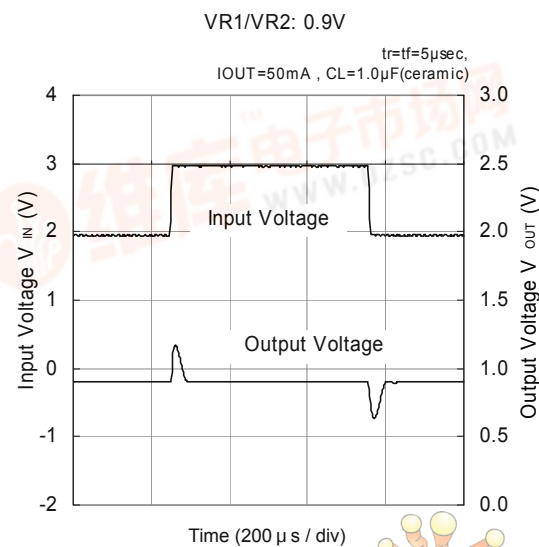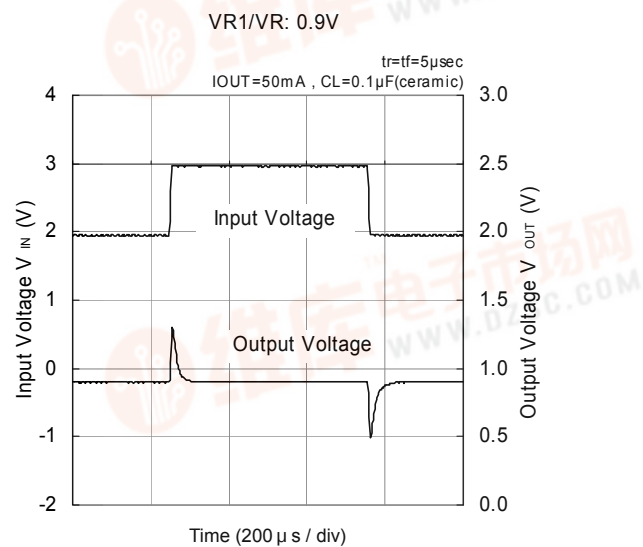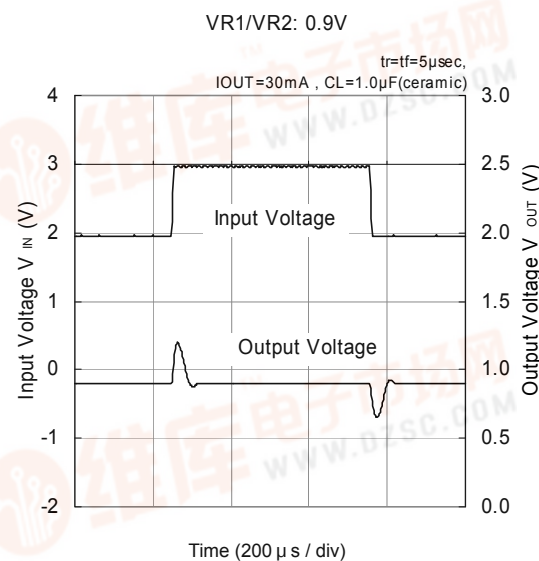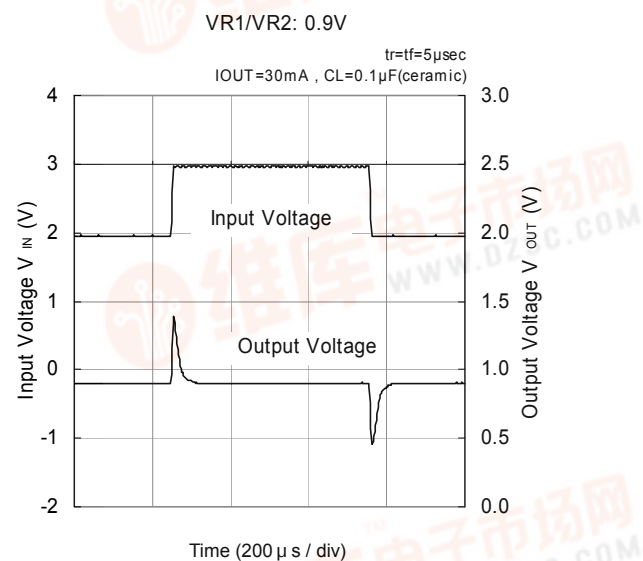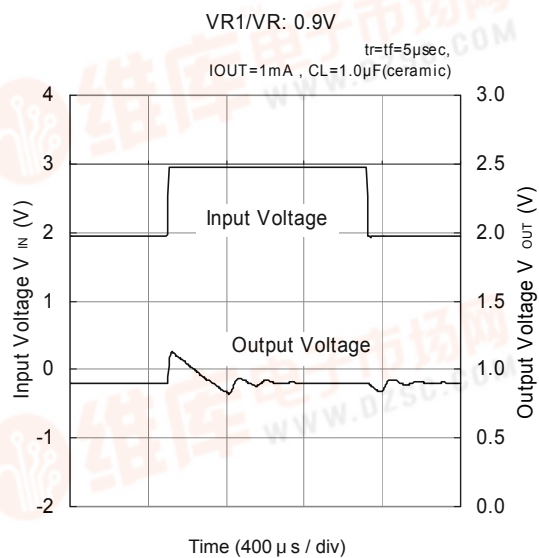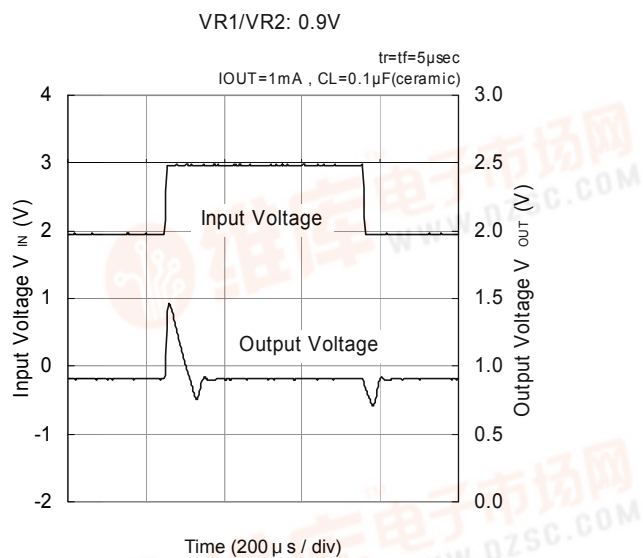

[查询XC6412供应商](#)







■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(8) Input Transient Response (Continued)

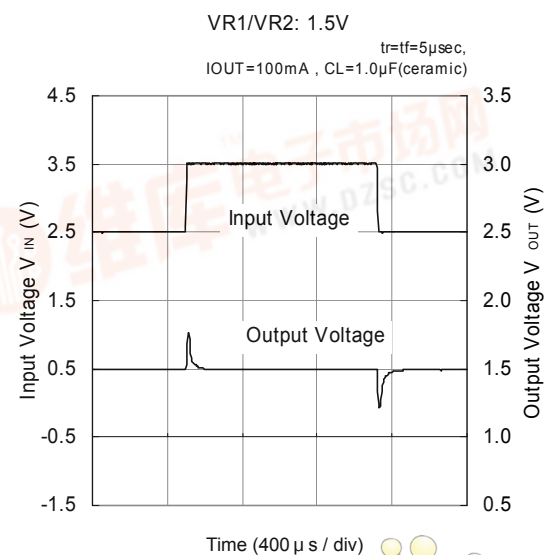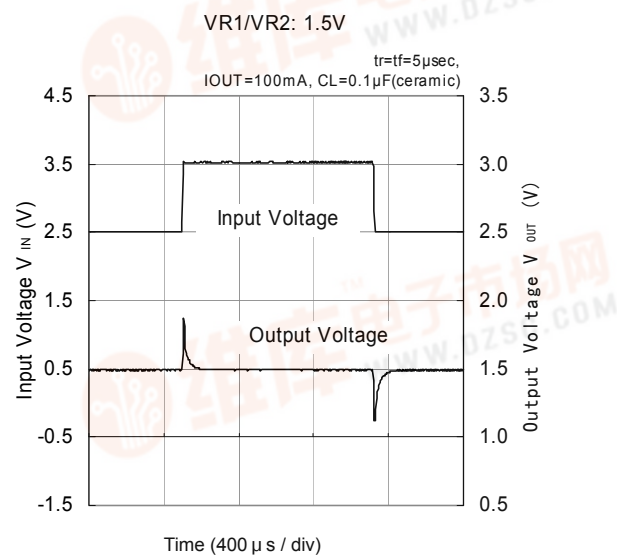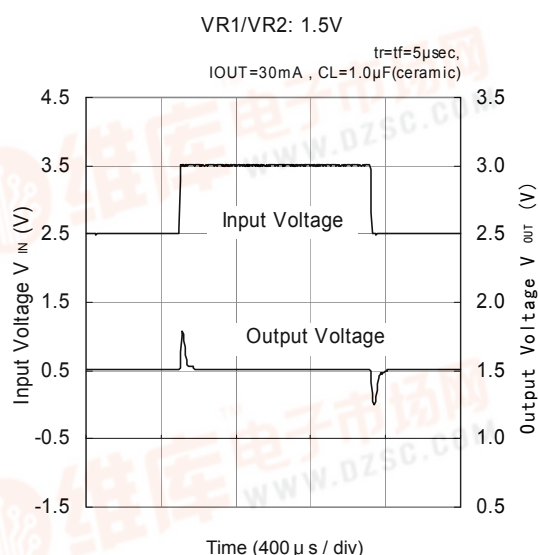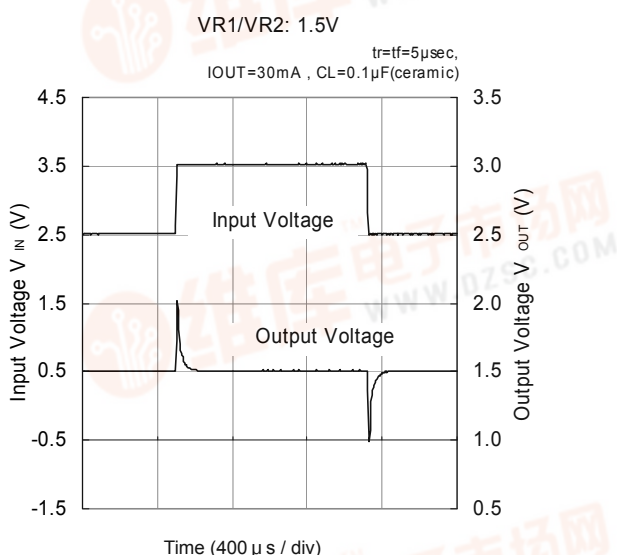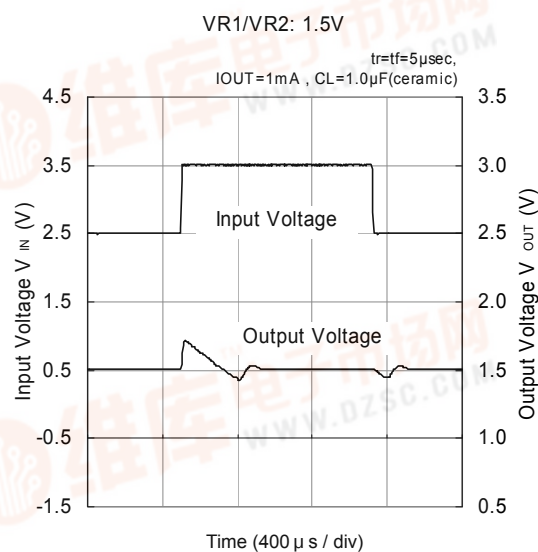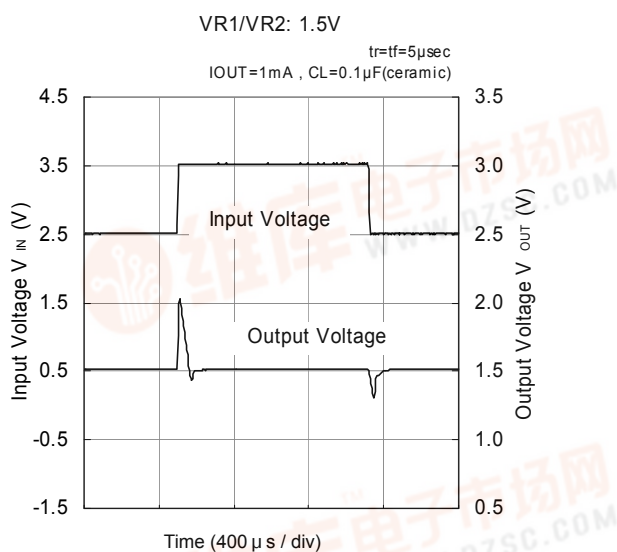

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)







(8) Input Transient Response (Continued)

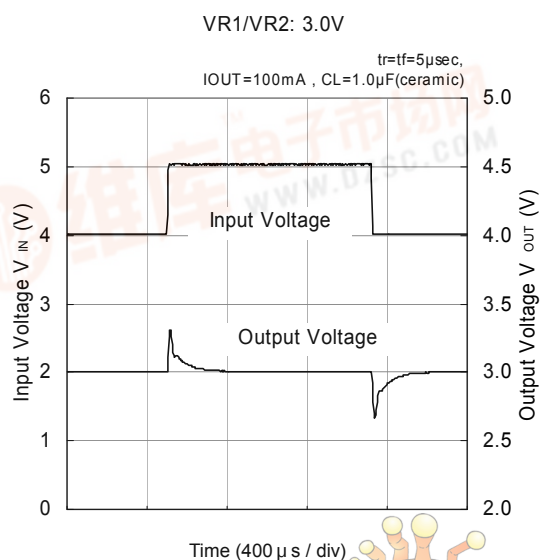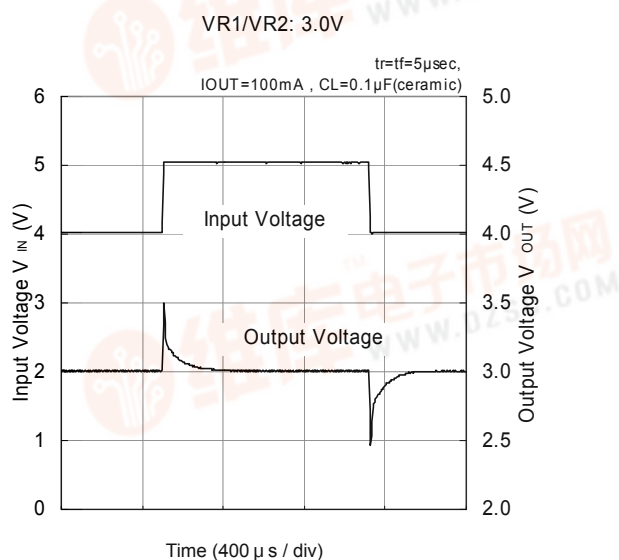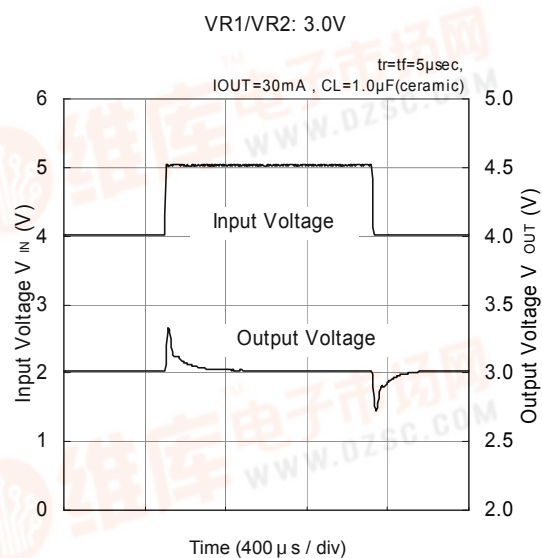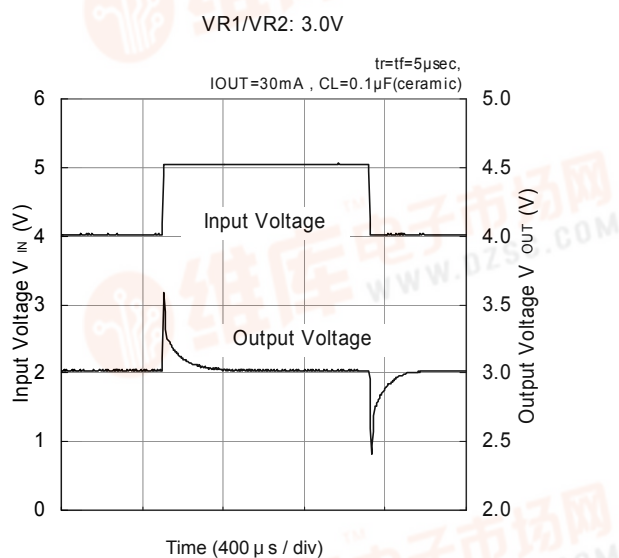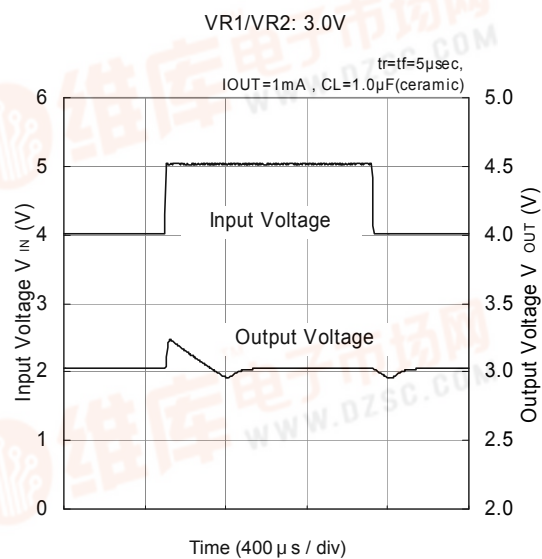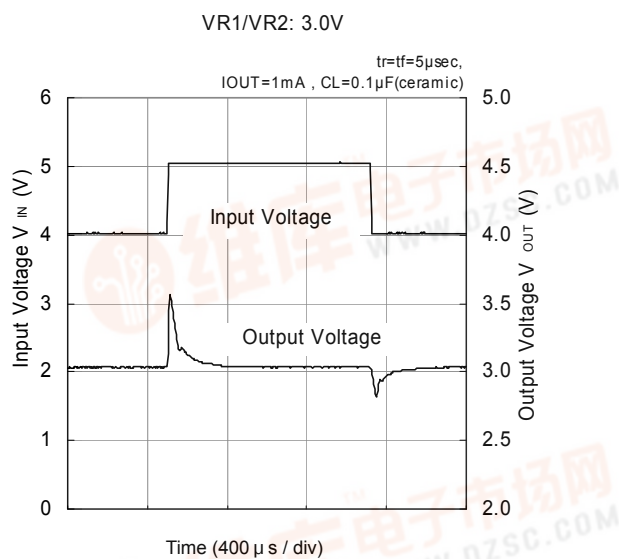

[查询XC6412供应商](#)







■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(8) Input Transient Response (Continued)

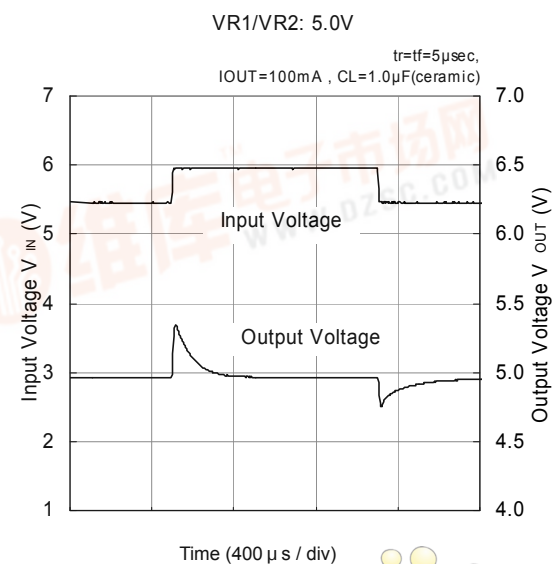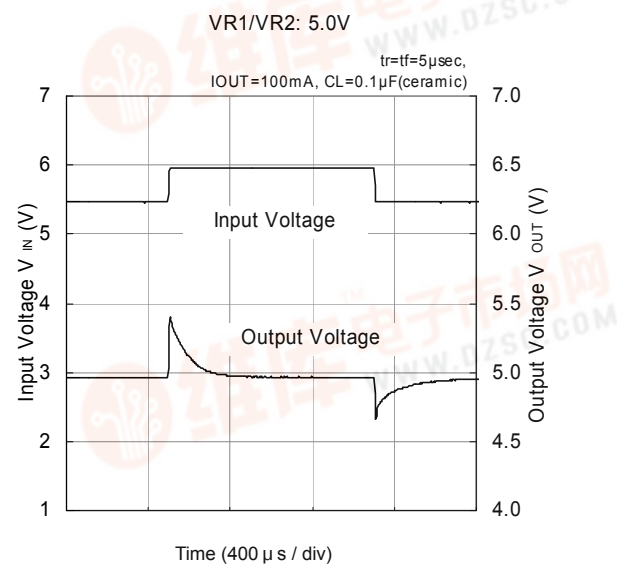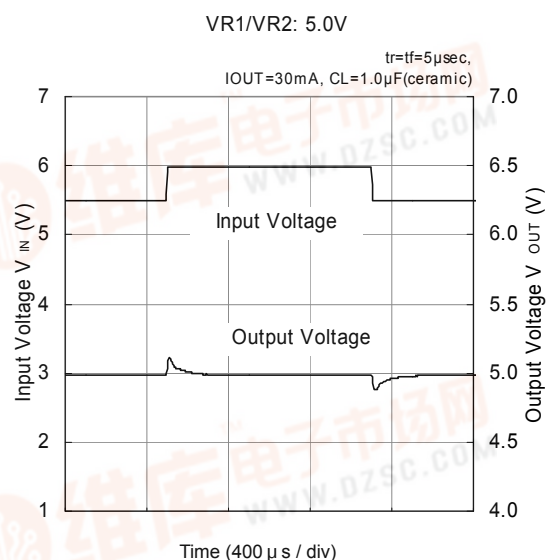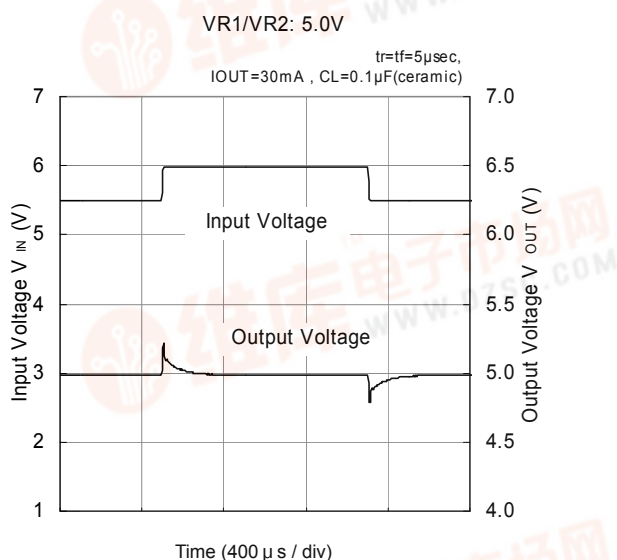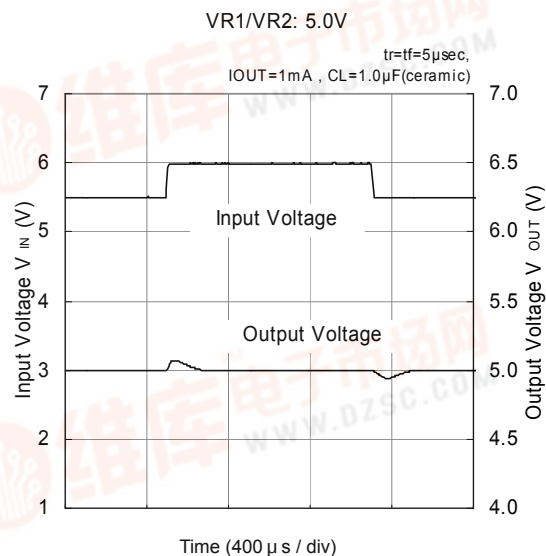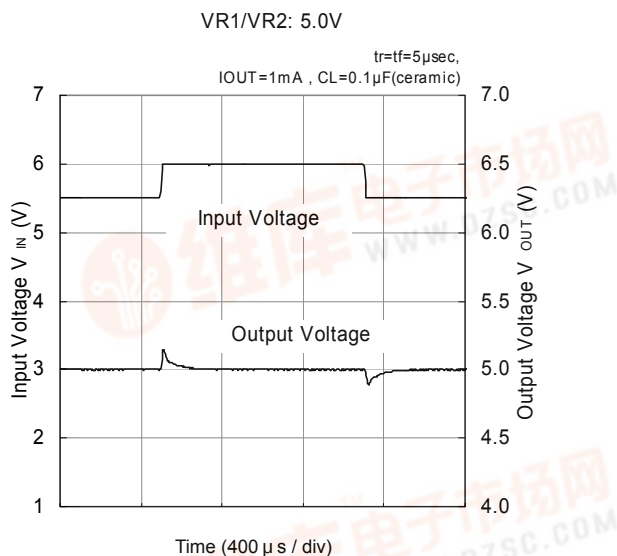

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)







(9) Load Transient Response

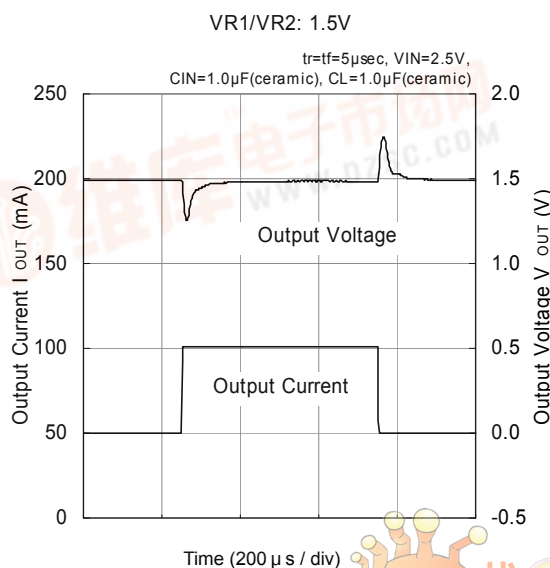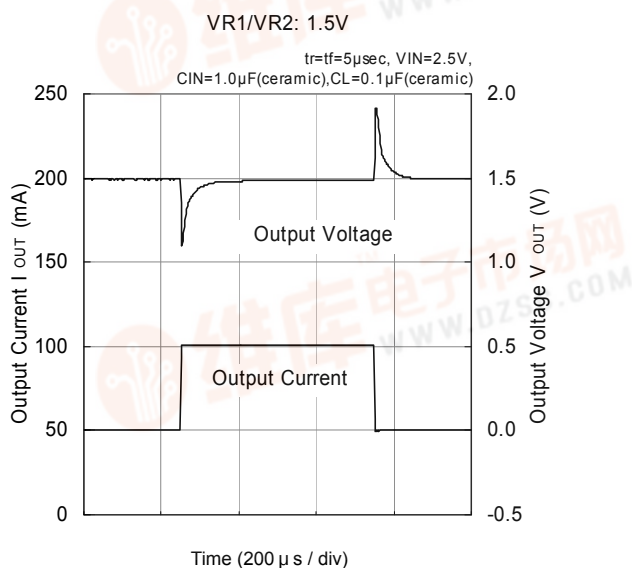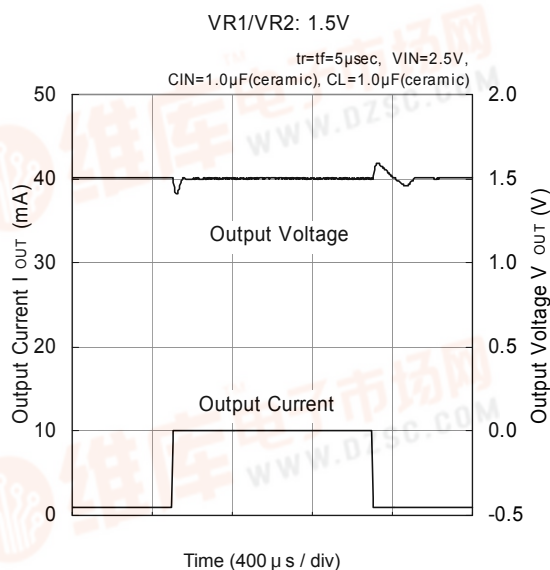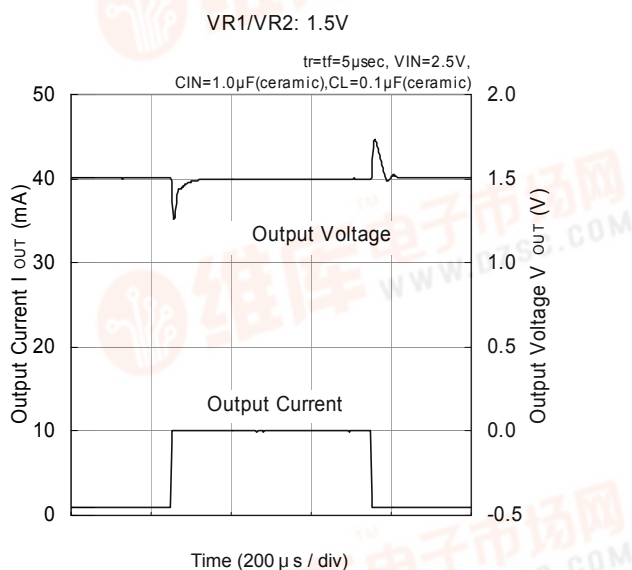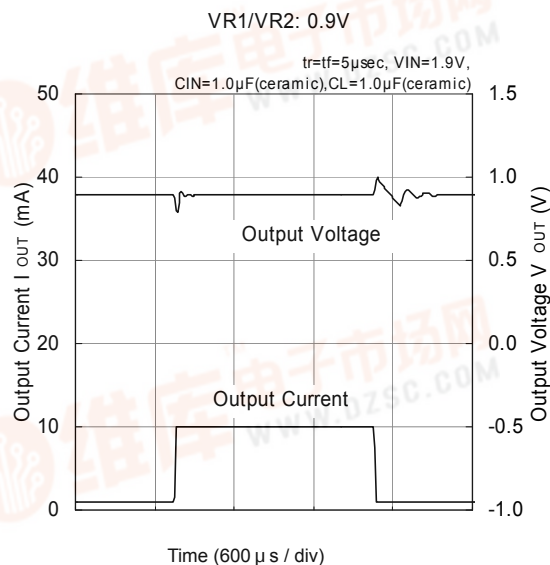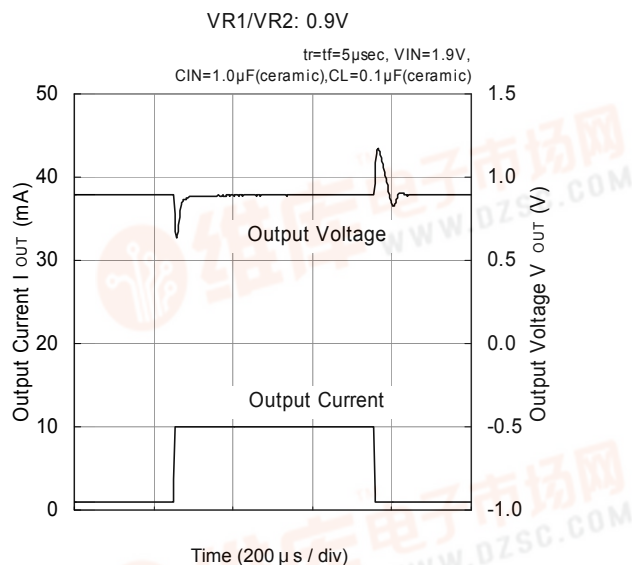

[查询XC6412供应商](#)



■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(9) Load Transient Response (Continued)

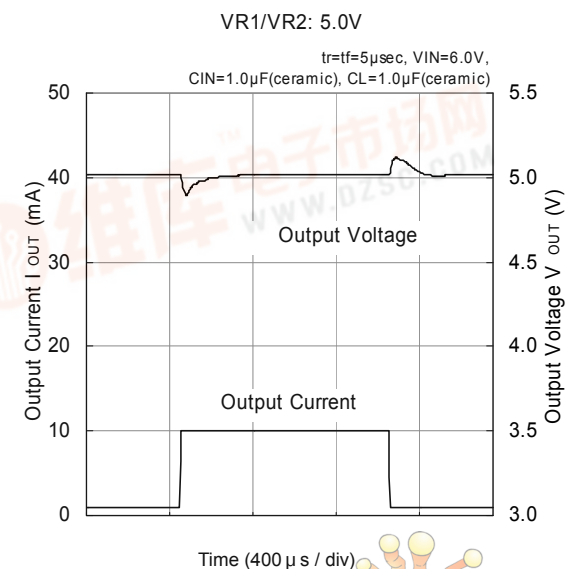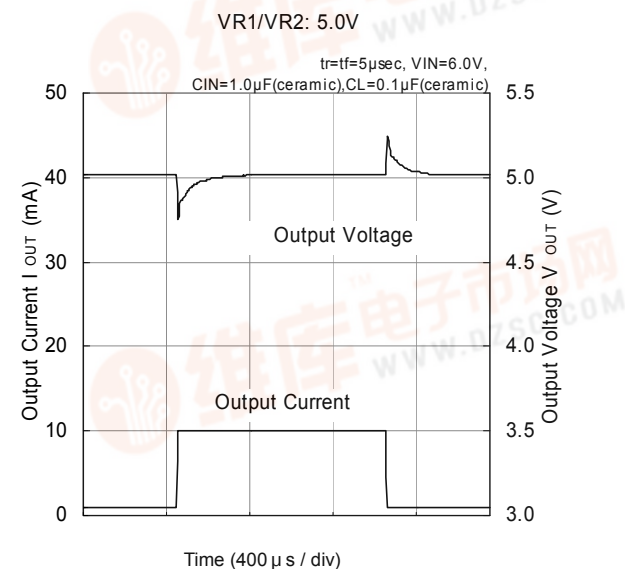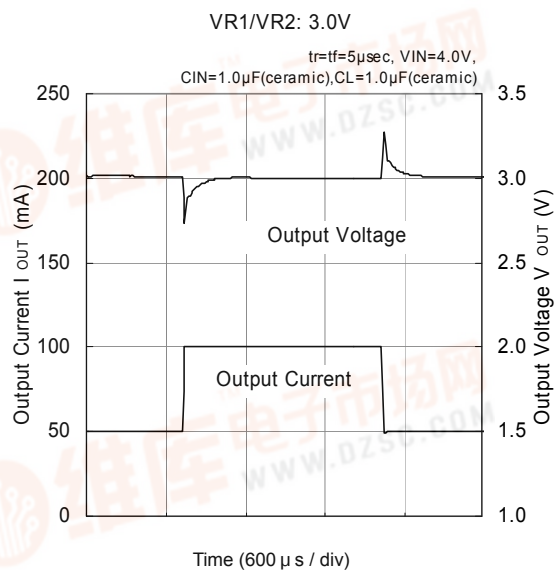
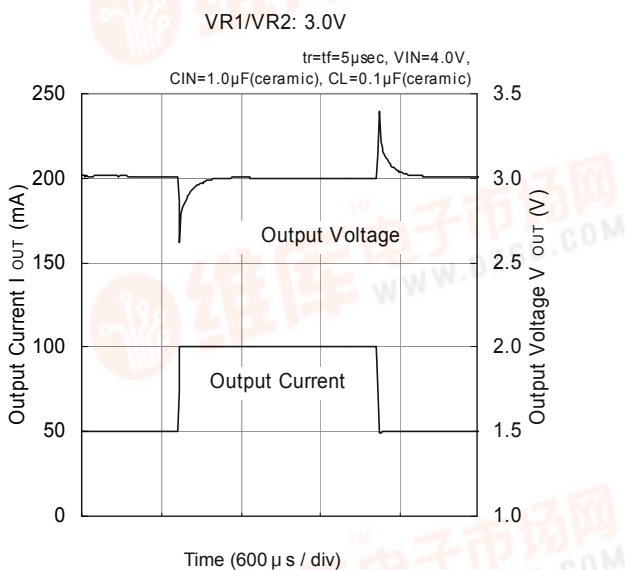
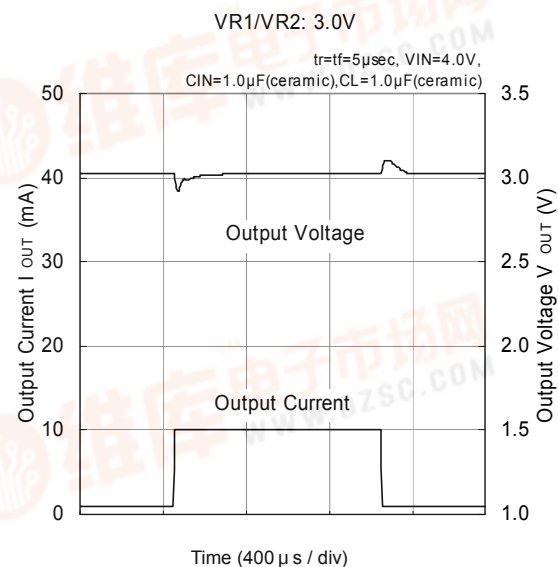
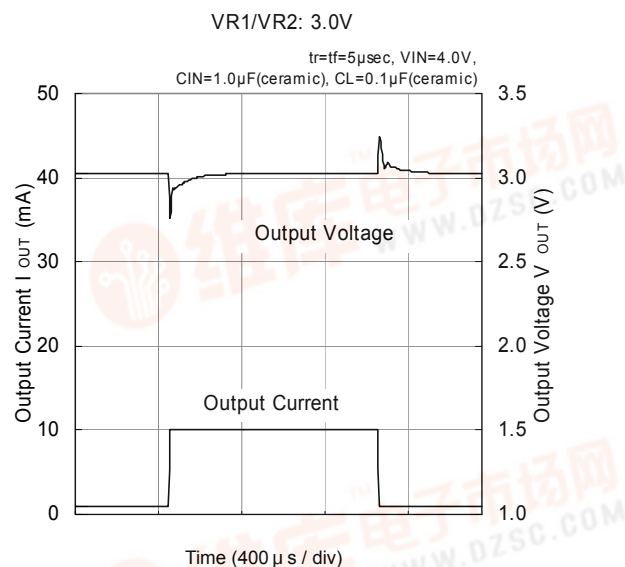


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(9) Load Transient Response (Continued)

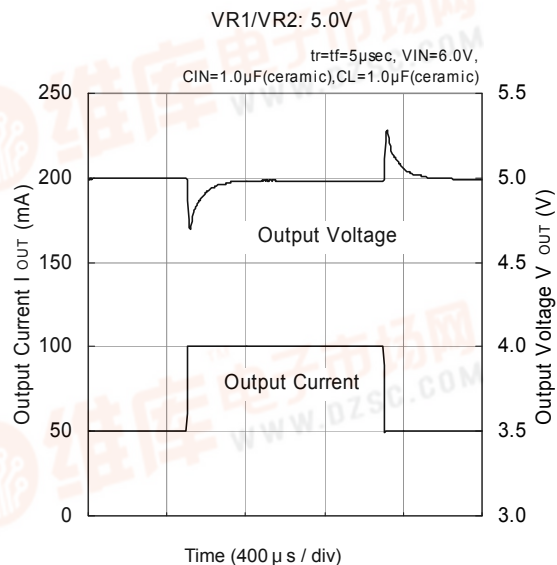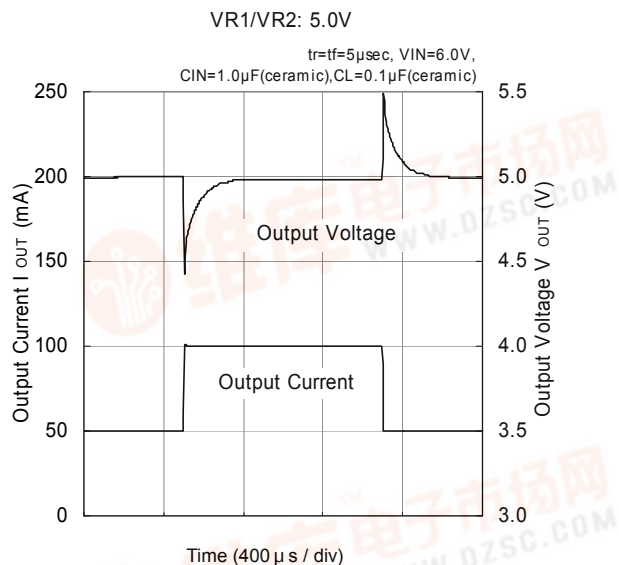







(10) Rising Response Time

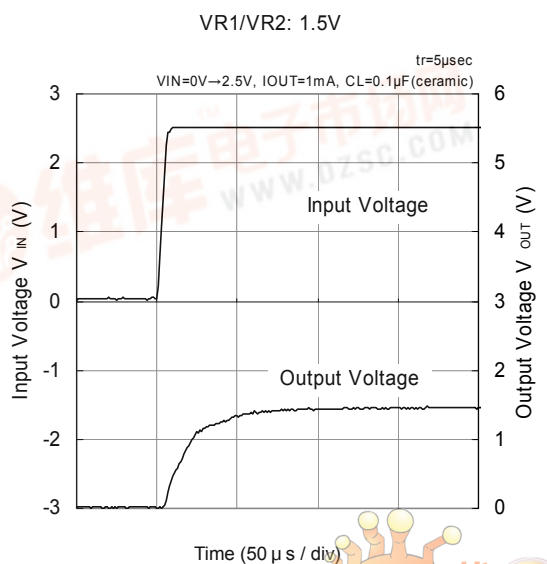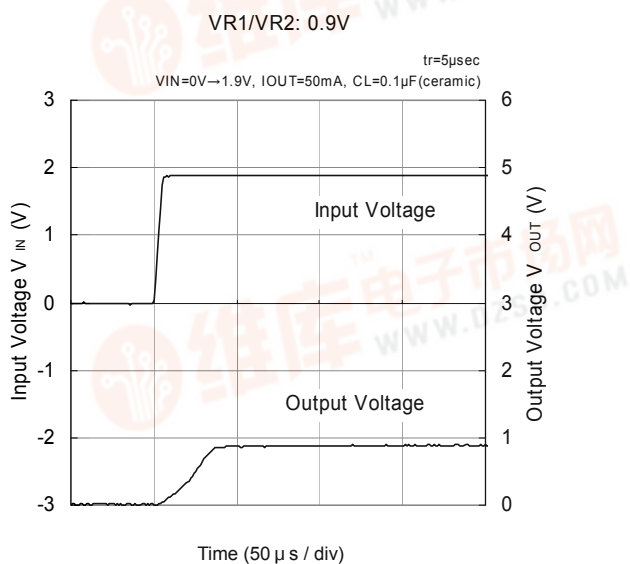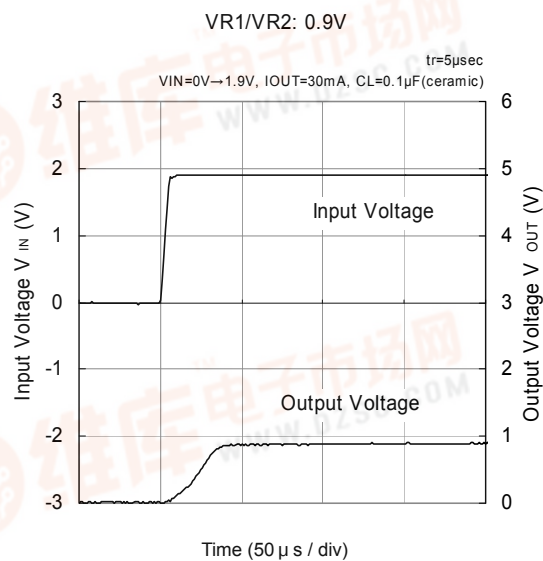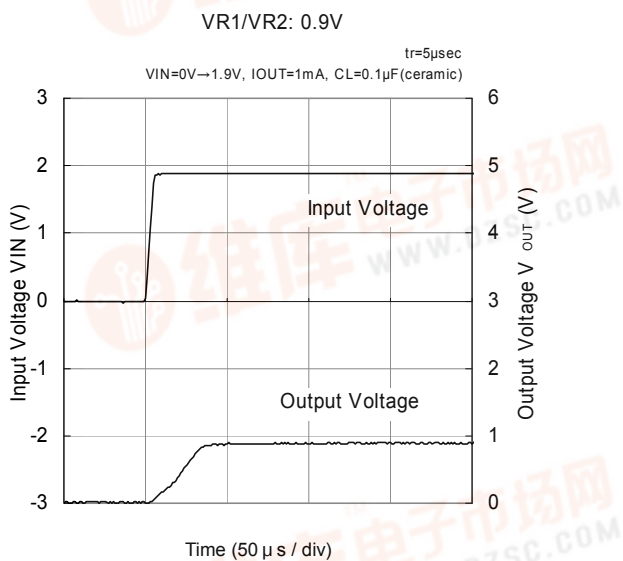

[查询XC6412供应商](#)



■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(10) Rising Response Time (Continued)

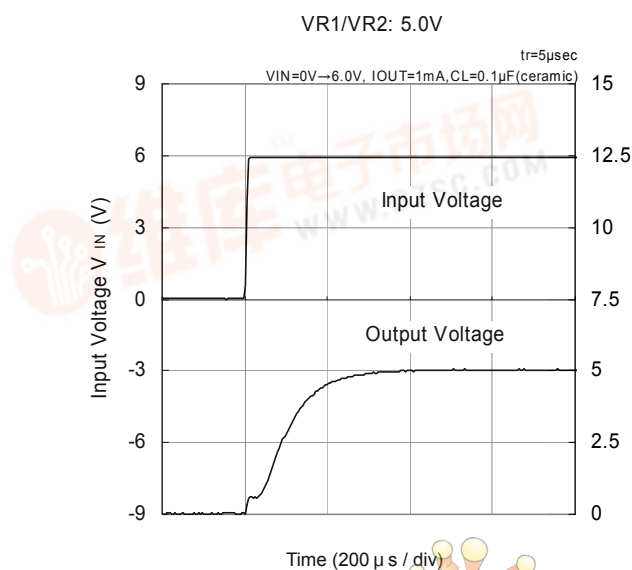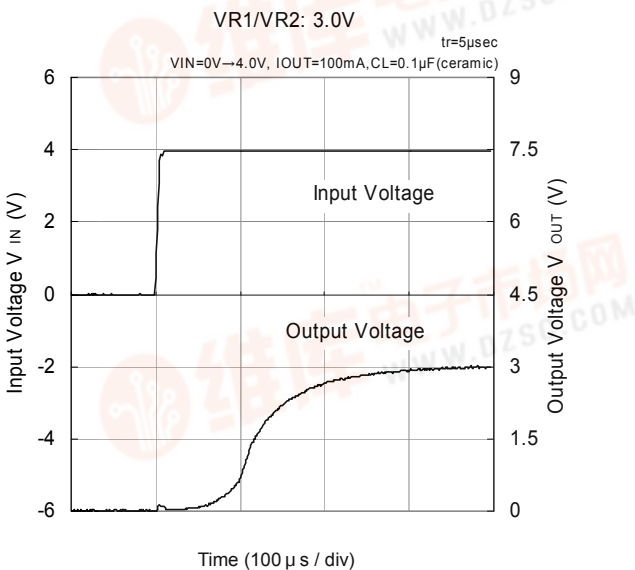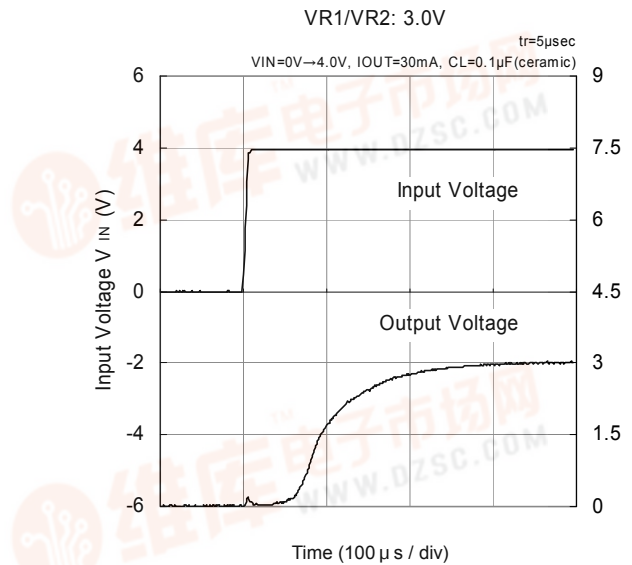
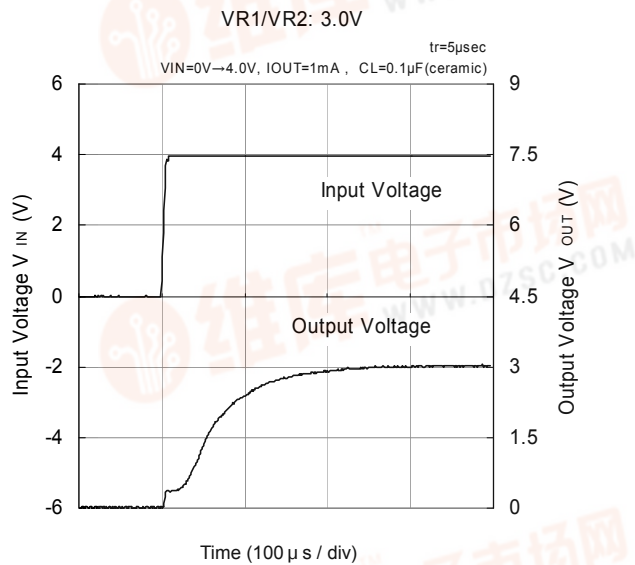
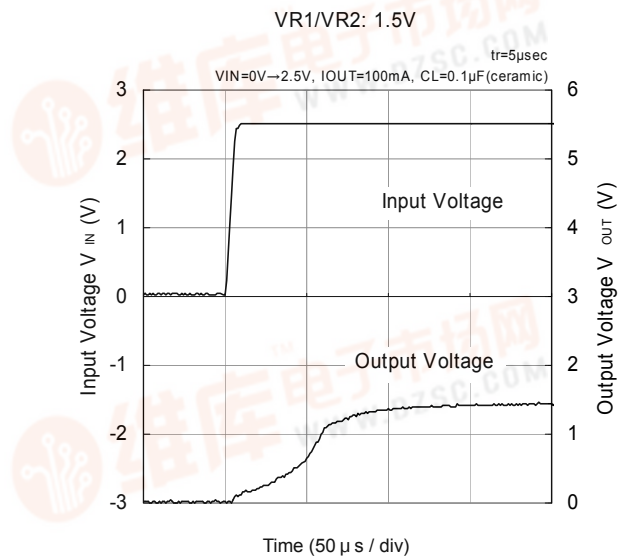
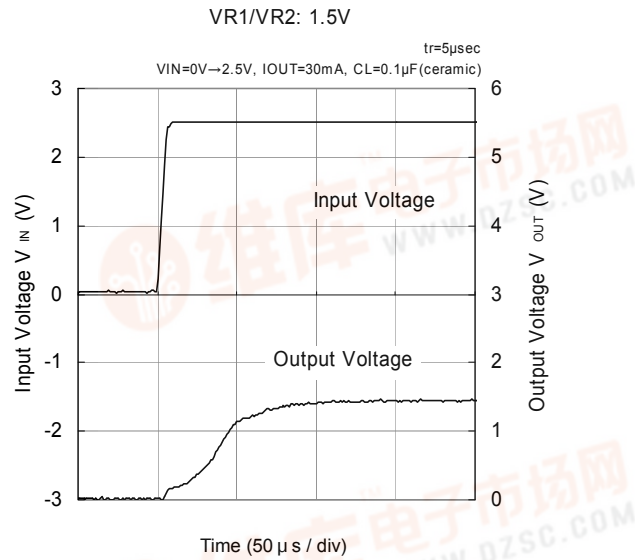


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(10) Rising Response Time (Continued)

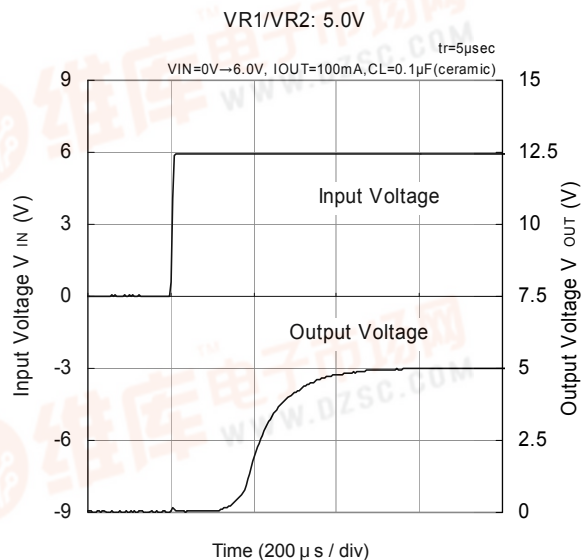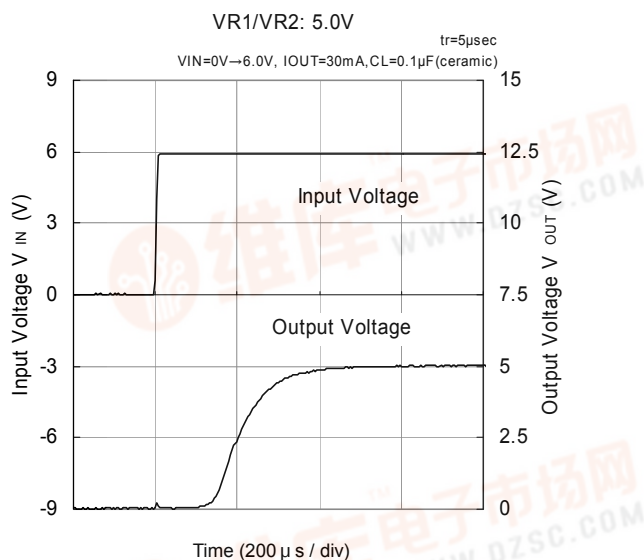

(11) EN2 Rising Response Time (For XC6412 series)

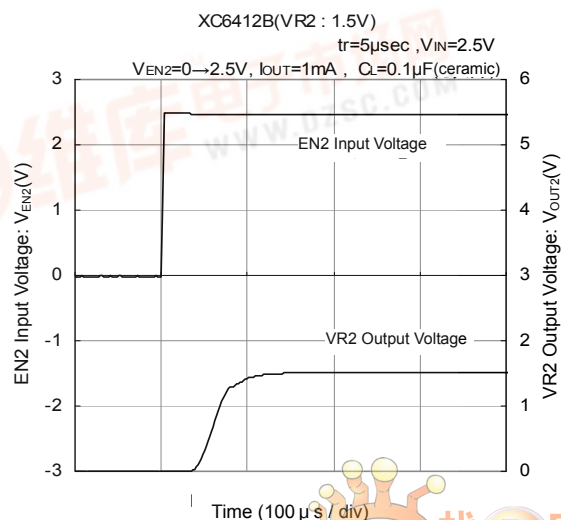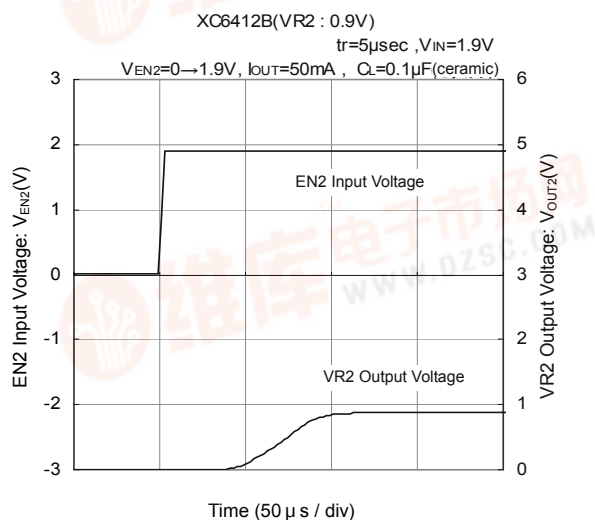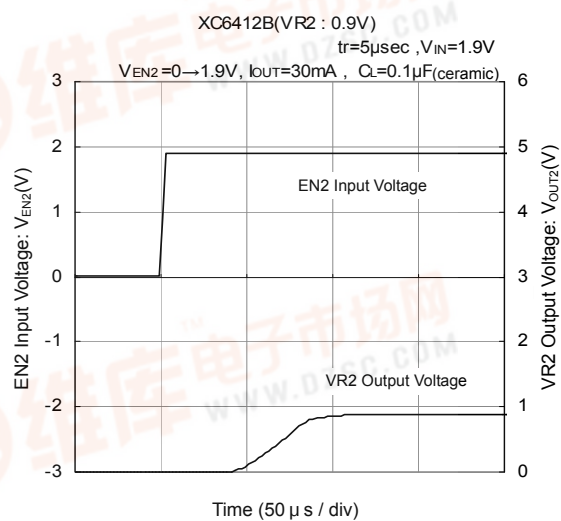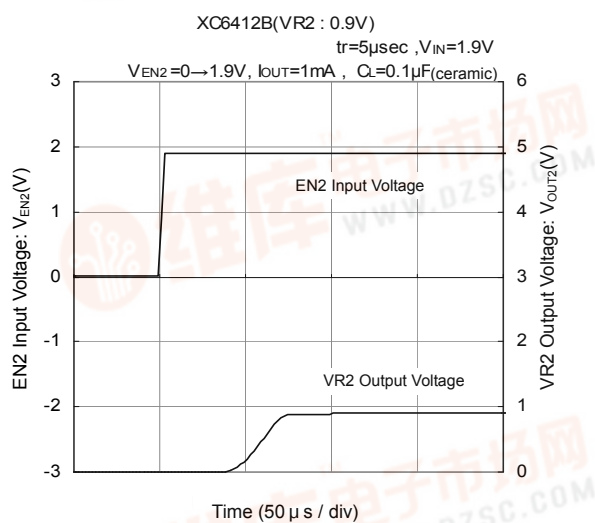


[查询XC6412供应商](#)


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(11) EN2 Rising Response Time (For XC6412 series) (Continued)


XC6412B (VR2: 1.5V)

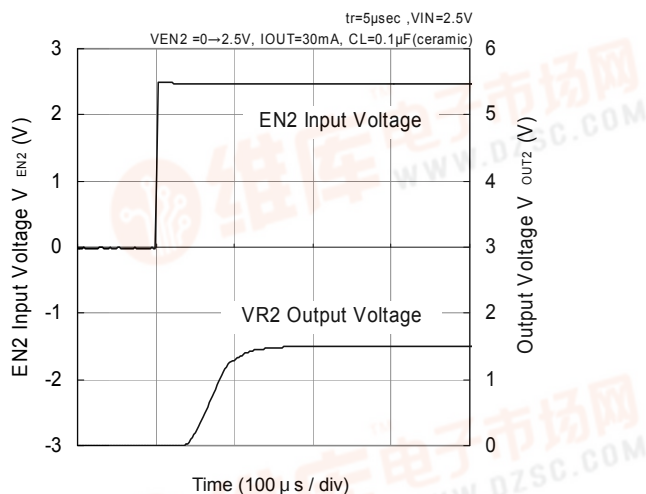


XC6412B (VR2: 1.5V)

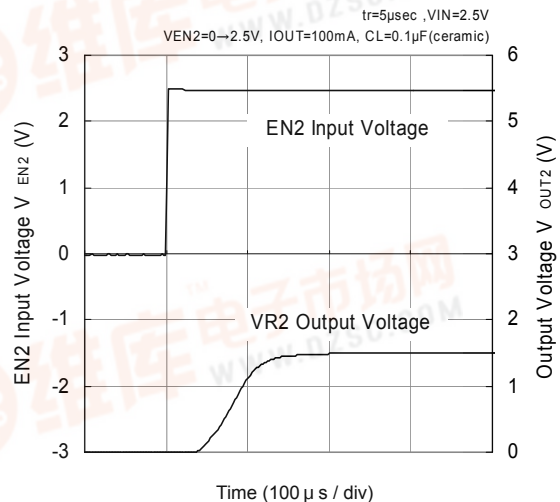


XC6412B (VR2: 3.0V)

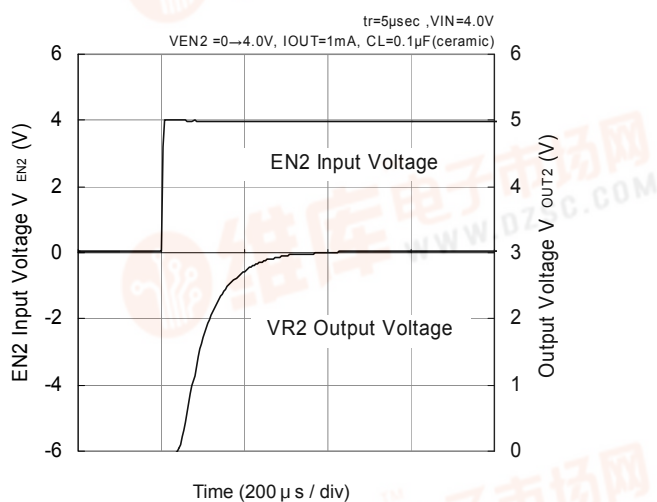


XC6412B (VR2: 3.0V)

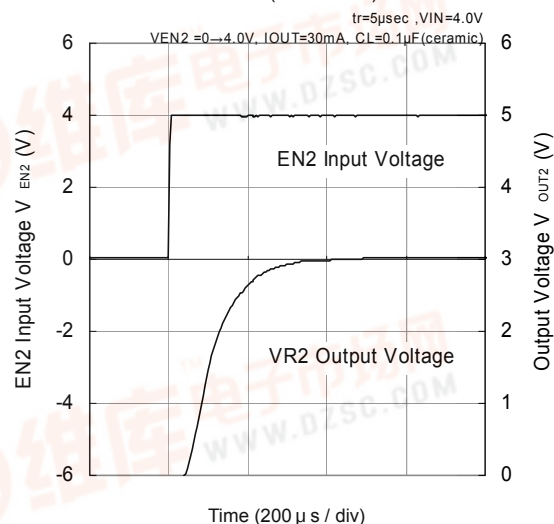

XC6412B (VR2: 3.0V)


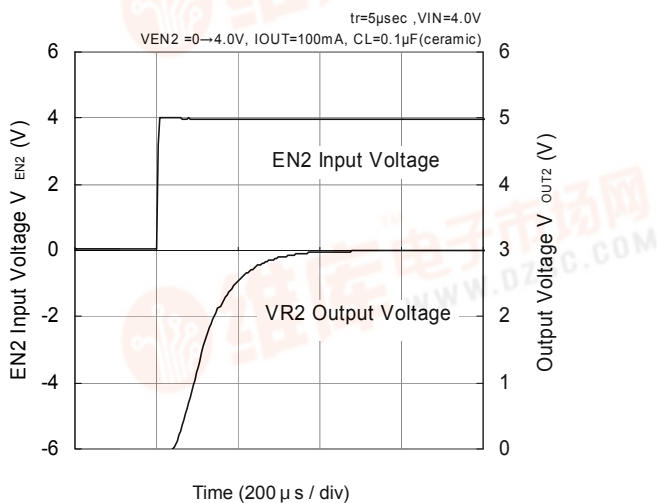


XC6412B (VR2: 5.0V)




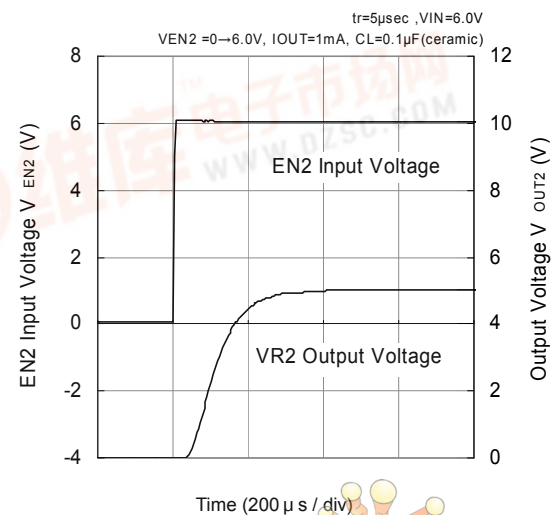


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(11) EN2 Rising Response Time (For XC6412 series)

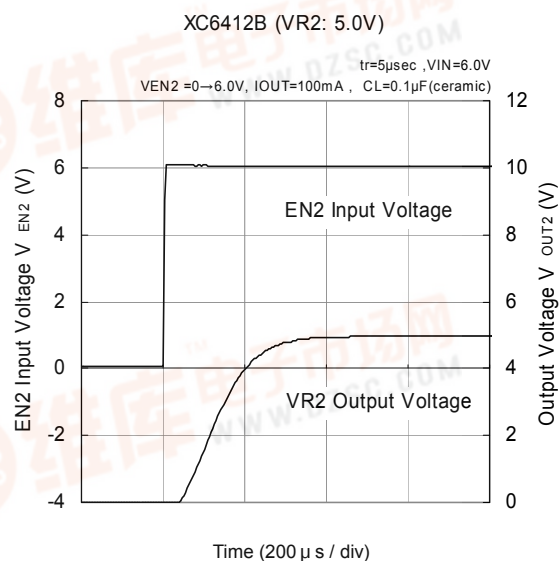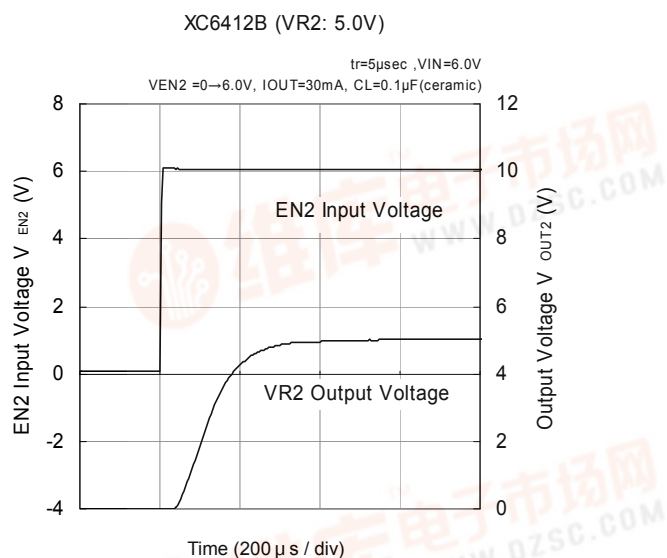


(12) Ripple Rejection Rate

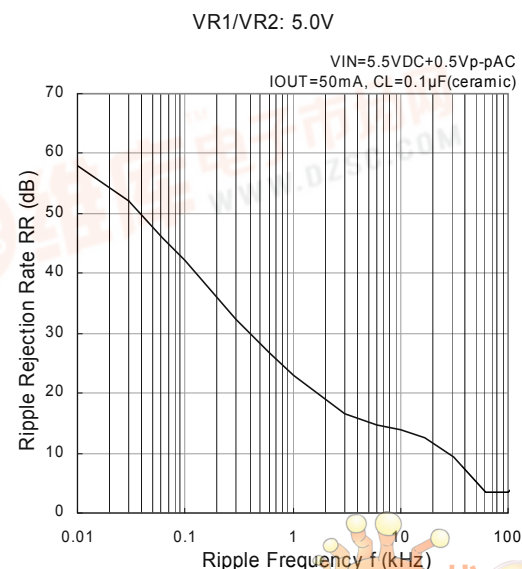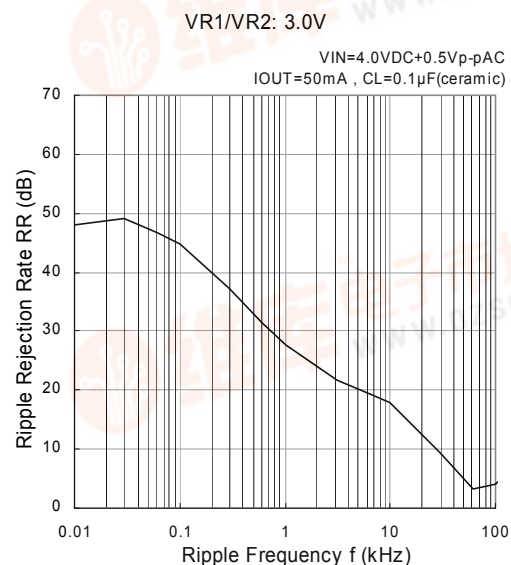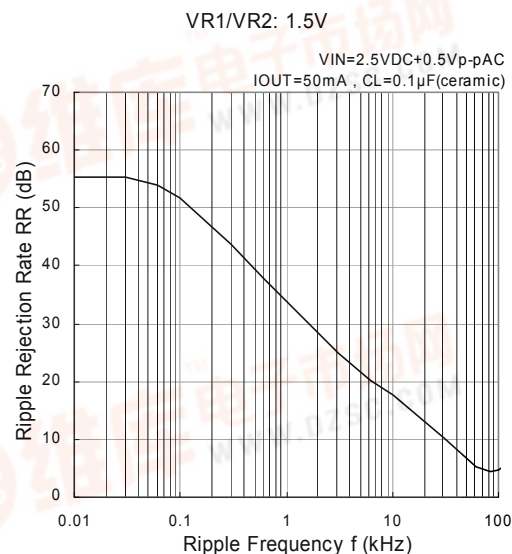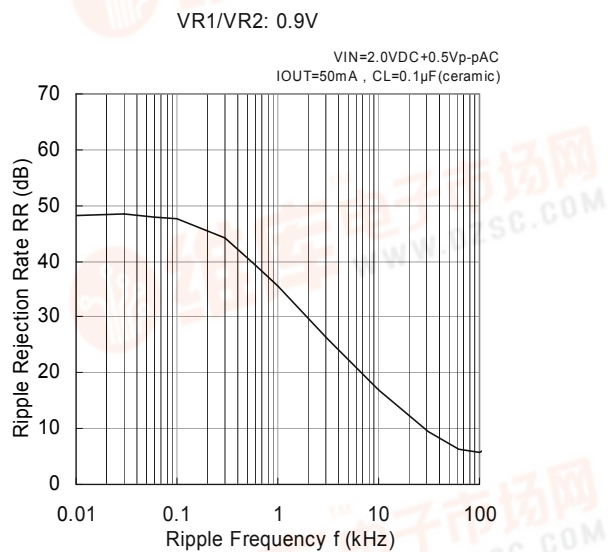


[查询XC6412供应商](#)

■ PACKAGING INFORMATION

● SOT-25

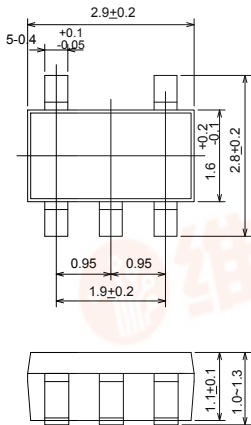

● SOT-26

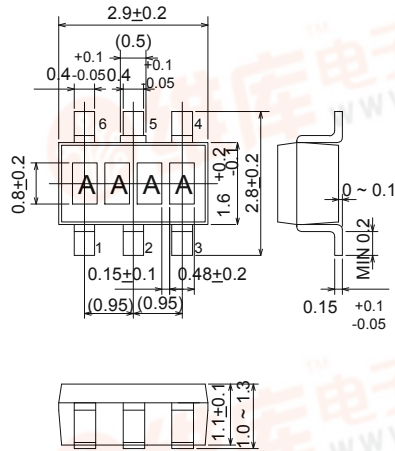

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this catalog is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this catalog.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this catalog.
4. The products in this catalog are not developed, designed, or approved for use with such equipment whose failure or malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this catalog within the specified ranges.
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this catalog may be copied or reproduced without the prior permission of Torex Semiconductor Ltd.

TOREX SEMICONDUCTOR LTD.