

查询"N4371A"供应商

Agilent N4371A RIN Measurement System

- ▲ Accurate, high-speed and easy measurements of RIN frequency characteristics
- ▲ Reduced uncertainty by using Agilent original characterization technique (patent pending)
- ▲ High-speed measurement (5 seconds or less for 20 GHz span, 2000 point, 10 average)
- ▲ Analysis on multiple traces by various markers

Agilent provides accurate, high-speed and easy-to-use spectral RIN measurement system by combination of a sensitive, low-noise optical receiver, a industry-standard x-series spectrum analyzer and a digital multi-meter.

RIN (Relative Intensity Noise) is a parameter representing temporal intensity fluctuations of a laser signal and is used as an evaluation index of the noise characteristic of the laser devices. RIN is an indispensable item for indicating the signal quality of both digital and analog optical transmission systems.

N4371A Agilent RIN measurement system provides accurate RIN measurements with a specially developed characterization technique (patent pending) for the photoelectric frequency response of the entire system. Agilent RIN measurement system also reduces uncertainties by removing the interference by thermal noise and shot noise precisely.

The measurement speed of N4371A RIN measurement system is very fast by special control of the spectrum analyzer. The measurement time is less than 5 seconds with the condition of a 20 GHz frequency span, 2,000 frequency points and 10 times average. The high-speed measurement enables a real-time observation of RIN frequency characteristics with varying parameters of the DUT.

The user interface of N4371A RIN measurement system shown in figure 2 is easily accessible from the spectrum analyzer display. The user interface

provides functions of displaying up to 5 traces, placing up to 5 markers and searching minimum or maximum RIN values in specific frequency range.



Figure 1. N4371A RIN Measurement System



Figure 2. RIN Measurement User Interface



Agilent Technologies

查询"N4371A"供应商

System Configuration

| | |
|-----------------------------------|--|
| Optical Receiver | See Figure 3 Block Diagram |
| System Software | See Figure 2 |
| X-Series Spectrum Analyzer | See Table 1 (Option: Including PFR, KYB, MSE, and DVR) |
| Digital Multi Meter | Agilent 34410A |
| Options | |
| Optical attenuator | Agilent 81576A or 81577A |
| Optical multi meter mainframe | Agilent 8163B |
| GP-IB Interface | Agilent 82357B USB/GP-IB interface |

Table 1 N4371A Frequency Range and Product Number of MXA-Series Spectrum Analyzer

| Frequency Range | 100kHz to 3GHz | 10MHz to 6.7GHz | 10MHz to 13.2GHz | 10MHz to 20GHz |
|--------------------------|----------------|-----------------|------------------|----------------|
| MXA Series Option | N9020A-503 | N9020A-508 | N9020A-513 | N9020A-526 |

System Block Diagram

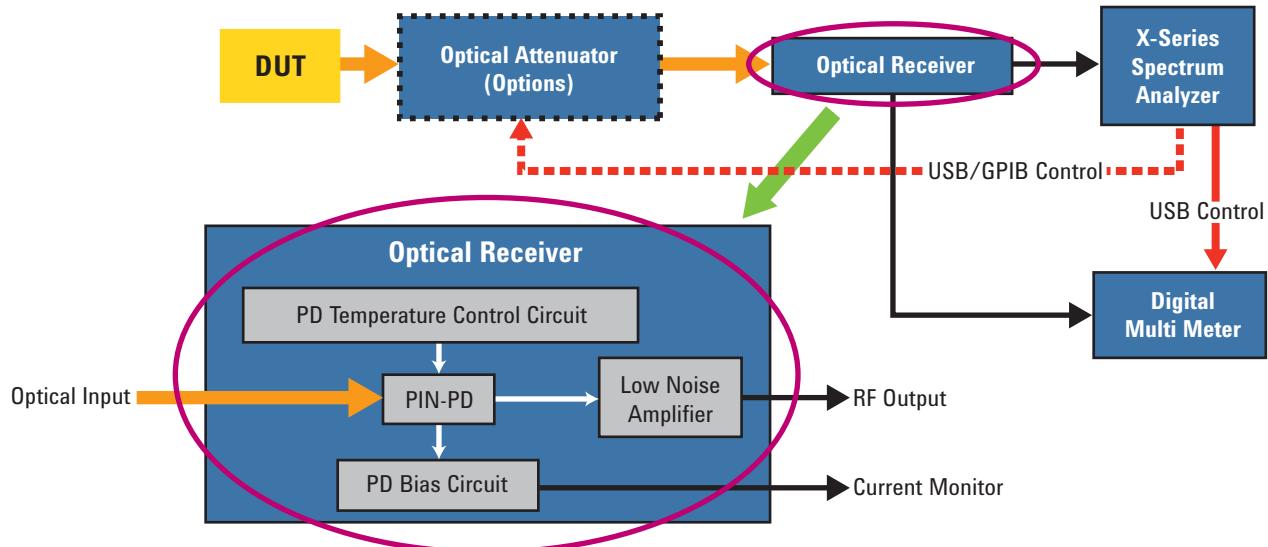


Figure 3. RIN Measurement System Block Diagram

Measurement Example

In the RIN measurement system, laser signal from DUT is converted to electric signal by the PIN-PD in the optical receiver. The electric signal is amplified by the low noise amplifier and measured with the Spectrum analyzer. The average photocurrent of PIN-PD is monitored by the digital multi meter.

The amplified electric signal contains thermal noise and shot noise as well as laser intensity noise. The RIN measurement isolates the amplified laser intensity noise from other noise components. The shot noise is calculated from the average photocurrent and the thermal noise is obtained as a noise without laser signal. The RIN measurement system calculate the laser intensity noise current before amplification by use of the photoelectric frequency response of the system. The accuracy of the photoelectric frequency response significantly affects measurement results. Agilent characterizes the response value precisely by originally developed methodology. The RIN value is derived from the laser intensity noise current and the average photocurrent.

The measurement results are saved as table data of the frequency and the RIN value in CSV file format and as graphical profiles in PNG file format.

Optionally 81576A/81577A optical attenuator, 8163B optical multimeter mainframe and 82357B USB/GP-IB interface can be included in the system configuration if the input optical power control is required for more than 10 dBm optical source power.

Figure 4 shows a RIN measurement example of a 1550nm DFB-LD. The RIN measurement system provides accurate, fast and easy RIN measurement of a very low RIN value of -160dB/Hz or less in a wide frequency range from 10MHz to 20GHz.

The smoothing aperture is selectable from 0% to 10% in displaying the measurement results. This function achieves a high resolution RIN evaluation with small smoothing aperture, which enables to capture peaked fluctuation of RIN characteristics.

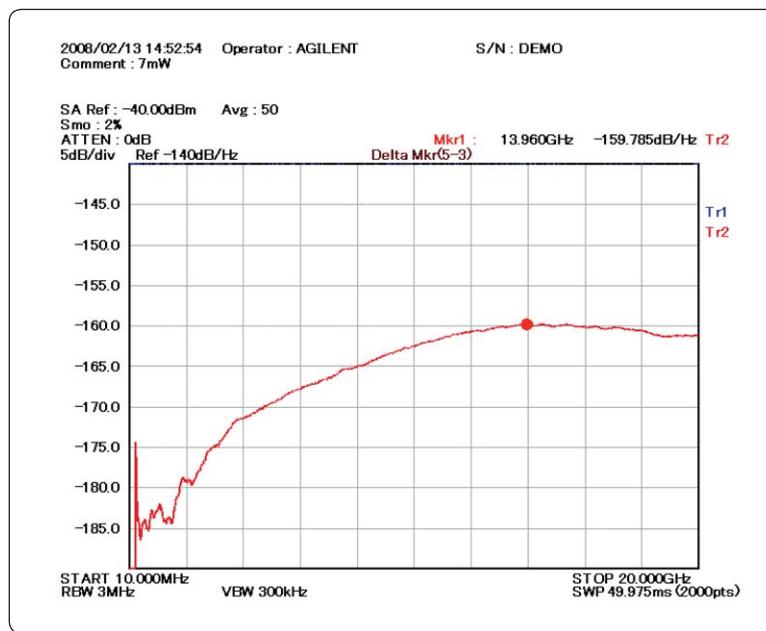


Figure 4. RIN Measurement Example

Performance Characteristics

| | |
|------------------------------------|--|
| Corresponding Wavelength | 1265 nm – 1625 nm |
| Frequency Range | 100 kHz to 3 GHz, 10 MHz to 6.7 GHz/13.2 GHz/20 GHz |
| Maximum input optical power | ≤ +10 dBm @1310 nm and 1550 nm |
| Minimum RIN | ≤ -160 dB/Hz @0 dBm received optical power; |
| Measurement Value | 1310 nm and 1550 nm |

查询"N4371A"供应商



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.

Agilent
Open

www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

| | |
|---------------|----------------|
| Canada | (877) 894-4414 |
| Latin America | 305 269 7500 |
| United States | (800) 829-4444 |

Asia Pacific

| | |
|-----------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 112 929 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Thailand | 1 800 226 008 |

Europe & Middle East

| | |
|---------------------------|--|
| Austria | 0820 87 44 11 |
| Belgium | 32 (0) 2 404 93 40 |
| Denmark | 45 70 13 15 15 |
| Finland | 358 (0) 10 855 2100 |
| France | 0825 010 700* |
| | *0.125 €/minute |
| Germany | 01805 24 6333** |
| | **0.14€/minute |
| Ireland | 1890 924 204 |
| Israel | 972-3-9288-504/544 |
| Italy | 39 02 92 60 8484 |
| Netherlands | 31 (0) 20 547 2111 |
| Spain | 34 (91) 631 3300 |
| Sweden | 0200-88 22 55 |
| Switzerland | 0800 80 53 53 |
| United Kingdom | 44 (0) 118 9276201 |
| Other European Countries: | |
| | www.agilent.com/find/contactus |

Revised: March 27, 2008

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2007, 2008

Printed in USA, May 23, 2008

5989-7300EN



Agilent Technologies