


Enhance your production lines

## WAVE COMPARATOR 8730-10/8731-10

Recorders

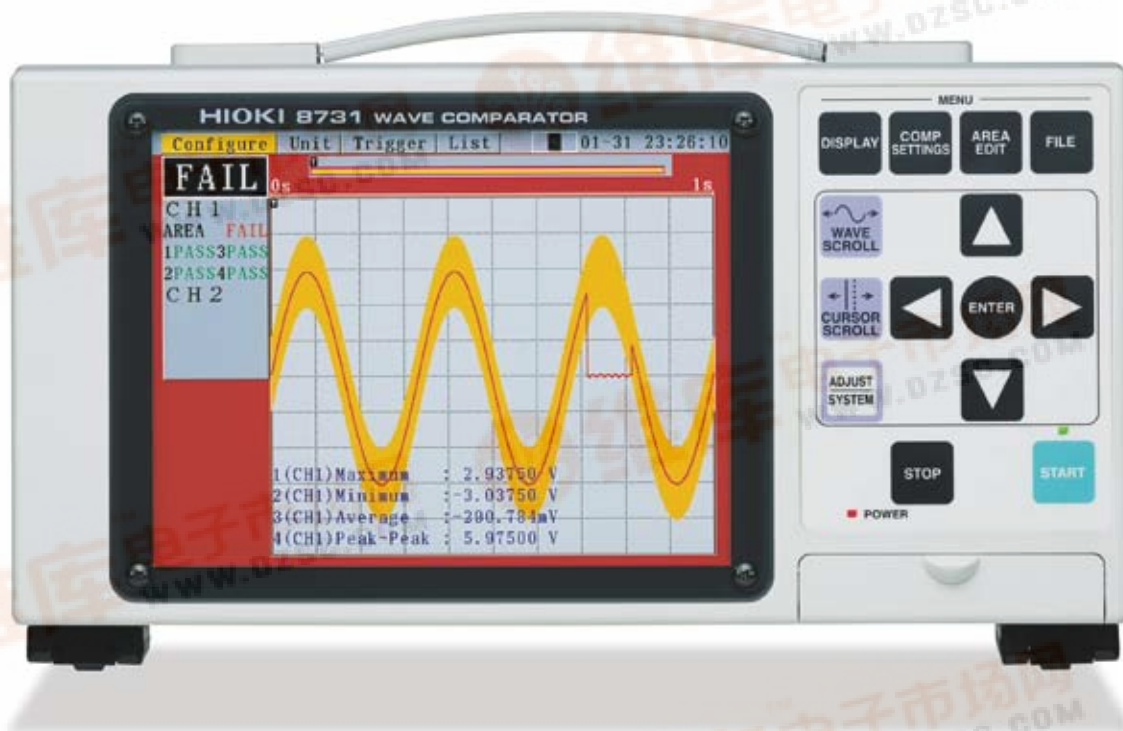

Ideal for automatic testing in manufacturing environments

## Simple operation for quick PASS/FAIL evaluation

The WAVE COMPARATORs 8730-10/8731-10 are purpose-designed instruments focusing on the superb waveform evaluation functions of the HIOKI MEMORY HiCORDER series. Specifically engineered in shape and functionality for seamless integration into production lines, the units are reasonably priced and easy to operate. Compared to the more expensive multi-functional devices, the 8730-10/8731-10 can accomplish a specific number of tasks with optimum efficiency. Define a range and perform area evaluation, conduct numeric evaluation using upper and lower thresholds, or perform both of these functions all at the same time.



[www.hioki.com](http://www.hioki.com)

HIOKI company overview, new products, environmental considerations and other information are available on our website.

ISO 9001 ISO14001  
JIM-0216 JQA-E-90091



# Use the **WAVE COMPARATOR** for evaluation or store data for subsequent PC analysis

查询"8731-10"供应商

## - Features -



How the WAVE COMPARATOR has answered customer demands:

- The power of the MEMORY HiCORDER is ideal for waveform evaluation, but integration into a control rack is difficult...
- We are looking to replace our old oscilloscopes used for visual monitoring, but we have a budget to meet...
- We've been using waveform evaluation instruments made by a control equipment manufacturer, but we can't store our data...
- Our existing evaluation devices can't sample at higher rates...

## What the **HIOKI 8730-10/8731-10 WAVE COMPARATOR** can offer you:

### Low price and easy operation

Compared to the HIOKI MEMORY HiCORDER 8835-01, waveform evaluation can be implemented at less than half the cost. Operation flow is suitable for a production line environment. The memory capability of the multi-function MEMORY HiCORDER has been streamlined for a single purpose. The setup screen employs Windows-like pull-down menus for easy operation.

### Resistant to tough working environments

The sheet key switches have a flat surface and are accommodating to environments where grease or other contaminants exist. There are no openings between the controls and the unit chassis, so that the keys cannot be gummed up by dust, etc. The PC Card slot on the front panel is equipped with a lid that provides basic dust proofing, which automatically closes when a PC Card is inserted.

### Conveniently store data on PC Cards

Data compatibility with the HIOKI MEMORY HiCORDER 8835-01 also makes it easy to display and print waveform data on the 8835-01, as well as conduct further data analysis. An evaluation area created on the MEMORY HiCORDER 8835-01 can be used or edited on the WAVE COMPARATOR 8730-10/8731-10.

### Physically designed for integration in production lines

All operation switches and the display screen are arranged on the front panel, while the measurement input and control input/output connectors are located on the rear. The metal plate enclosure is flat on all sides to facilitate installation in a rack or a control panel. Handles and feet are removable and can be mounted on the top if desired.

### Versatile external control

The external control connectors are isolated and allow connection also of a sequencer or other device with separate ground potential. If 24V DC is externally supplied, the control signals can operate at 24V. Using the internal isolated 5V power supply for control is also possible. Separate evaluation result output signals are provided for area and numeric evaluation. The two-channel model has a dedicated output for each channel.

### High-speed operation with 1M-sample/second

The high sampling speed of the 8730-10/8731-10 is ideal for not only conventional mechanical systems but also electrical applications. The sampling frequency is 1/100 of the time axis range, resulting in 1-μs sampling at 100 μs/DIV.

# Suitable for a wide range of uses. Realize your own ideas.

[查询"8731-10"供应商](#)

## - Application examples -

### Motor operation testing

Waveform evaluation can be used to test whether a motor is operating normally. To do this, the actual waveform is compared to the control signal tolerance range. Because the 8730-10/8731-10 allows storing of measurement data on a PC Card, test data management can be implemented easily.

### Gear pre-load testing

Machining precision is an important factor for assuring that driving force transmission gears mesh smoothly. Torque fluctuations that arise during gear rotation can be measured and evaluated with the **WAVE COMPARATOR**. Automatic storing of waveform data for each sample makes data handling simple and quick.


### Hydraulic pressure testing

X-Y waveforms such as pressure/flow of a pump or pressure/stroke of a hydraulic press can be tested with the two-channel model 8731-10. The two inputs are suitable for X-Y waveform measurement, and Lissajous and other donut-shaped patterns can also be evaluated.


### Welding quality check

Simply monitoring the current value often is not enough to evaluate the quality of a welding step. Especially in automated lines where welding robots are used, evaluation

of current waveform patterns is highly useful for checking and maintaining quality.

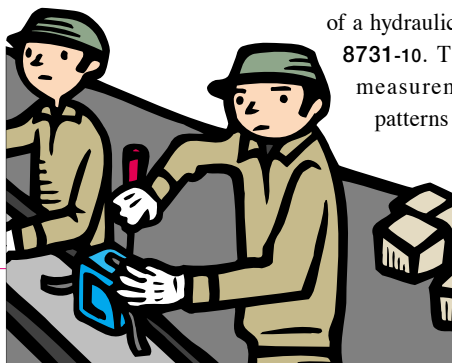

## External view and dimensions

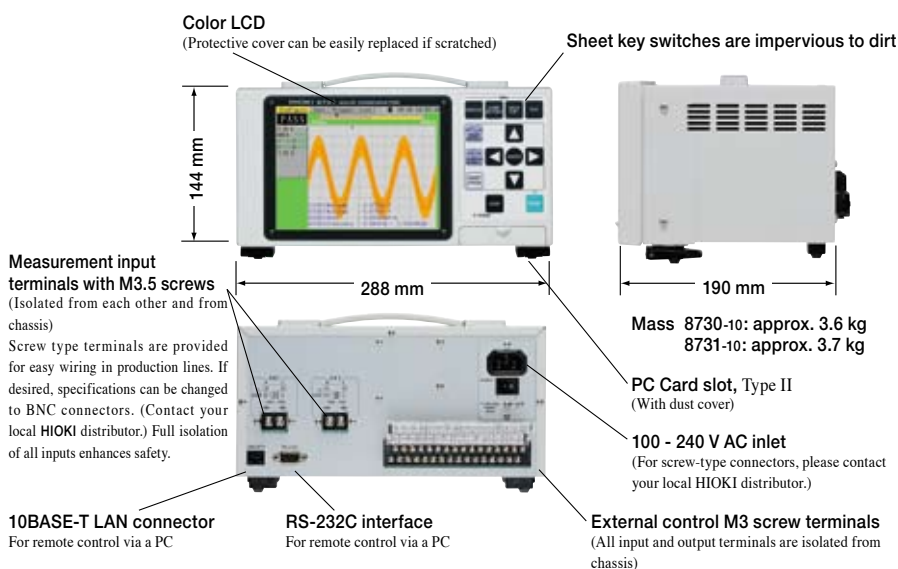

Screw-on type feet can be easily removed. Use the feet when placing the unit directly on a work surface. When mounting the unit on top of a control installation, screw fastening is possible by removing the plastic extensions and fitting the supplied left/right brackets.



Remove the handle and feet for easy rack-mounting. Versions to match either JIS or EIA standards are available. Please contact your local HIOKI distributor for details.



The WAVE COMPARATORS as seen installed in a control panel. Please contact your local HIOKI distributor for details.



Large handle for convenient portability and transport. By angling the feet, the instrument can be positioned as desired for easy viewing.





# Basic steps for area evaluation

[查询"8731-10"供应商](#)

## - Operation examples -


### Simple operation

Simultaneously perform area and numeric evaluation. The screen shown below is an example for a PASS result, using a green background. The overall evaluation result is shown at the top left, with details shown below this and numeric results displayed at the bottom of the screen.

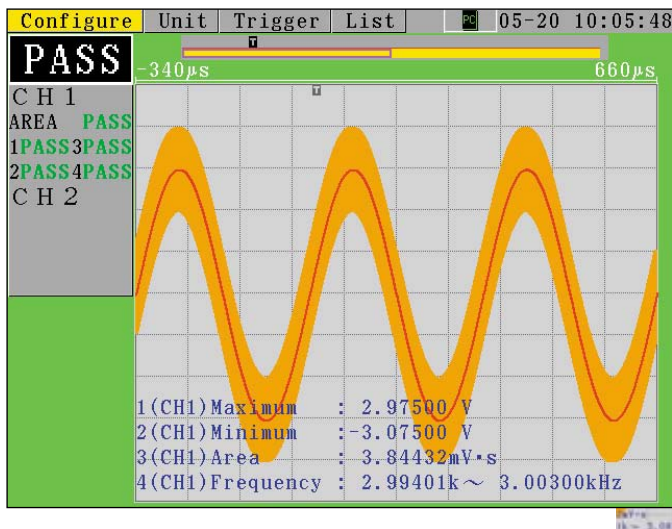


This is a FAIL result screen.


The background is red, making the status easy to discern also from a distance.




Operation is very simple, using the cursor keys while watching the screen. To accept a setting, press SET. To switch between different screens, use the MENU keys at the top.

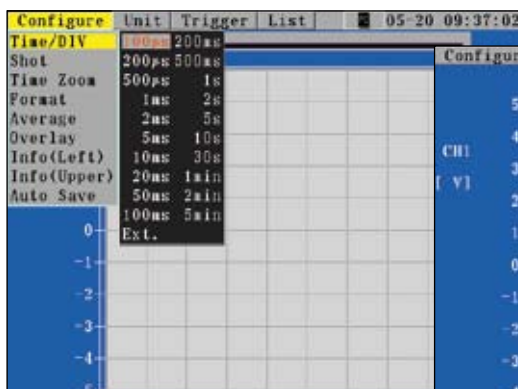


The "Configure" menu at the top of the screen opens a list for controlling the time axis and making other settings. In the above example, 1DIV = 100μs is selected.

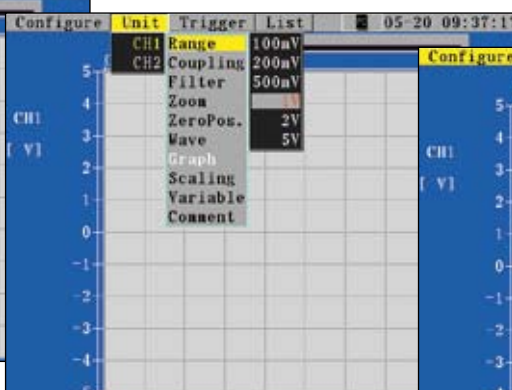


The "Unit" menu at the top of the screen opens a list for controlling the voltage range and making other settings. In the above example, 1DIV = 1V is selected.

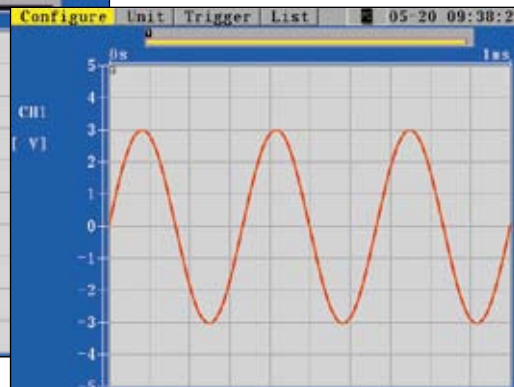


Measure a "Good" waveform and use it to create an evaluation area.

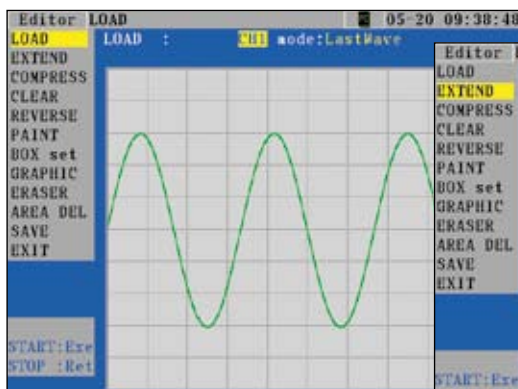

Load the measured waveform into the "Editor" window. (You can also create a new area from scratch without loading a waveform.)

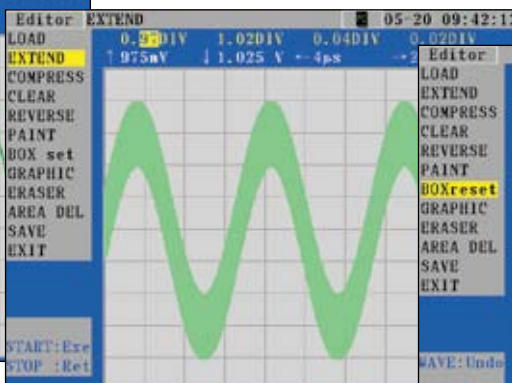

Based on the loaded waveform, create an evaluation area by expanding the graph in the vertical and horizontal plane. The amount of shift is specified in DIV increments.

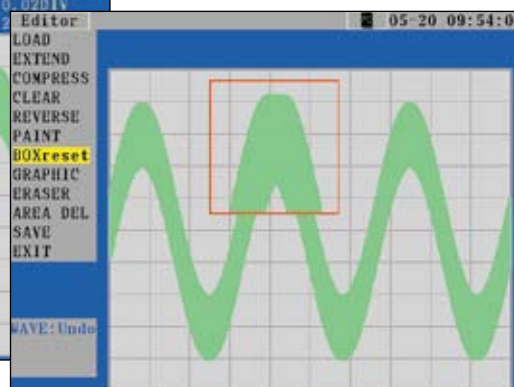

By placing a box frame around a section, you can enlarge or reduce a specific segment of the area.

# Model 8731-10 has two inputs for simultaneous evaluation of two waveforms

查询"8731-10"供应商


## - Operation examples -

### Two channels for further enhanced performance

The inputs of Model 8731-10 (2-channel model) are shown below. The M3.5mm screw terminals are convenient when designing the wiring layout of a production line. For different requirements, specifications can also be changed to BNC connectors. (Please contact your local HIOKI distributor for details.) For safety, all inputs are isolated from chassis ground and from each other.




Rear view (input terminals)

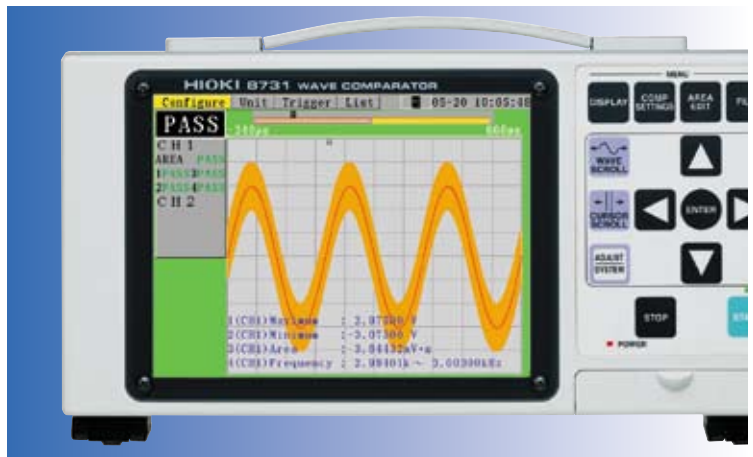

Front view (2-channel evaluation example)


### Evaluation screen can be divided into two windows without impairing resolution

When performing 2-channel evaluation with the 8731-10 (2-channel model), you can tile the screen horizontally into two sections. On screen, this means that display resolution is halved, but evaluation precision is not affected. The internal processing memory continues to perform highly accurate evaluation using the full screen resolution.

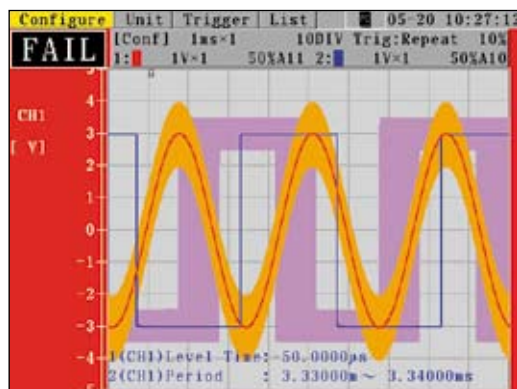

Full screen display example


When tiling the screen horizontally, display resolution is reduced by a factor of 2, but...

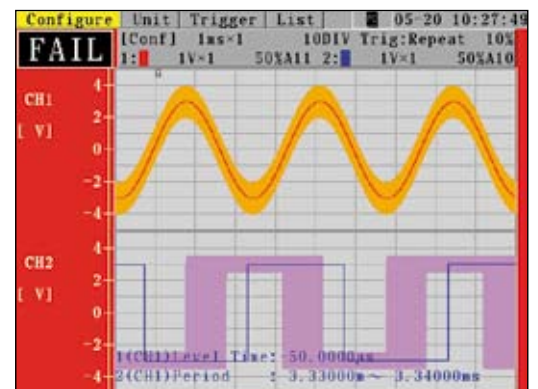


Tiled screen display example: Evaluation is still performed at full screen resolution, so there is no drop in accuracy.

### Time axis evaluation of X-Y Lissajous waveform and donut-shaped patterns

Because area evaluation is based on screen display pixels, complex donut-shaped patterns such as shown at right can also be evaluated. Evaluation devices from other manufacturers use A/D conversion and base their area assessment on digital values. Therefore, they can only judge whether or not the upper and lower limits have been exceeded. Models 8730-10 and 8731-10 on the other hand can also perform FAIL evaluation in the center of the range, something that is not possible with competing products. (X-Y measurement is possible only with Model 8731-10)

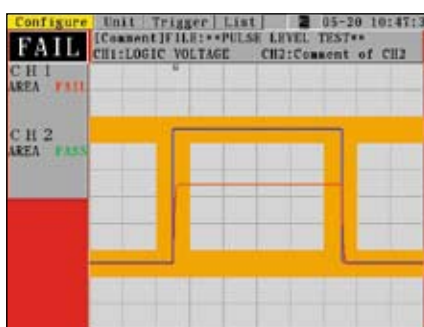

Evaluating a time axis waveform using a donut-shaped area: FAIL evaluation of a pulse with insufficient amplitude

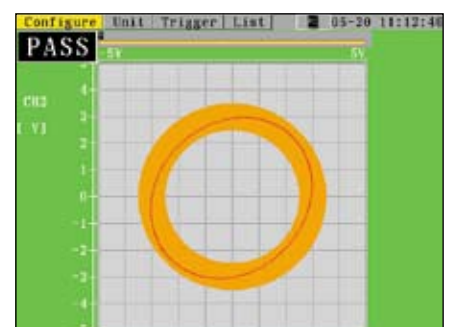

Using 2-channel input for X-Y Lissajous waveform evaluation: Vertical and horizontal voltage input allows Lissajous waveform evaluation. (Only with Model 8731-10)


# Numeric processing and evaluation, data store capability, communication ready

查询"8731-10"供应商

## - Operation examples -

### Numeric processing and evaluation functions


Choice of four different types of numeric evaluation functions available. Upper and lower limits can be set against which the results of numeric processing are to be compared. Besides maximum and minimum values, many other processing items (total 20 items) are also provided. Dual evaluation capability means that area evaluation and numeric evaluation can be performed at the same time. The evaluation result screen shows the overall PASS/FAIL result at the top left, and details on area evaluation and numeric evaluation 1 - 4 below this.

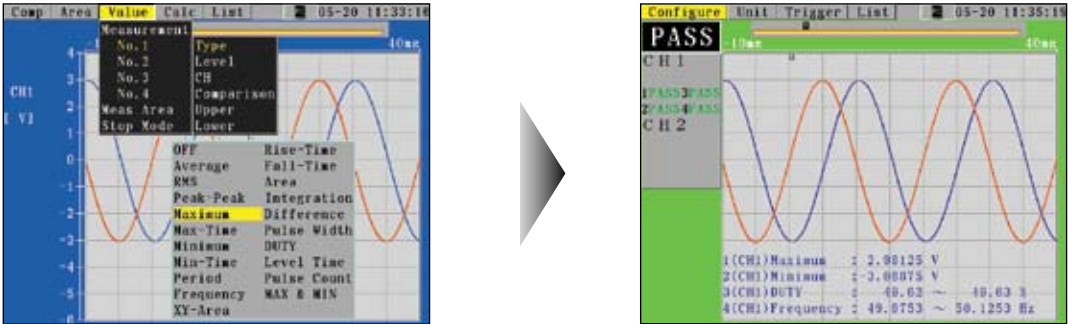

### Store evaluation area data and setup parameters for repeat applications

The internal memory of the unit holds information on up to 16 different evaluation areas. Separate area evaluation settings can be stored for each channel. Memory slots are numbered A01 - A16 and can be selected freely. A reduced size graph of the area shape is shown besides each selection, making it easy to pick the one you want.

In addition, 16 different setup parameters can be stored in the internal memory and selected also via external control or key operation.

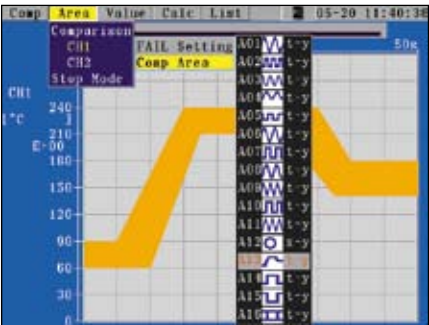

### Convenient data save and transfer functions

Measurement data can be stored on PC Cards which is convenient for archiving test data for production lines. A LAN connector (10BASE-T) and RS-232C interface are provided as standard features. This lets you link the units to a PC network for easy access to important data. (LAN COMMUNICATOR 9333 is required to save data on a PC network, sold separately.)

#### Internal memory storage capacity

Time axis	Sampling period	8730-10 (1 ch)/memory capacity 50 kW Maximum recording length 500 DIV	8731-10 (2 ch)/memory capacity 50 kW/ch Maximum recording length 500 DIV
100μs/DIV	1μs	0.05 s	0.05 s
200μs/DIV	2μs	0.1 s	0.1 s
500μs/DIV	5μs	0.25 s	0.25 s
1ms/DIV	10μs	0.5 s	0.5 s
2ms/DIV	20μs	1 s	1 s
5ms/DIV	50μs	2.5 s	2.5 s
10ms/DIV	100μs	5 s	5 s
20ms/DIV	200μs	10 s	10 s
50ms/DIV	500μs	25 s	25 s
100ms/DIV	1ms	50 s	50 s
200ms/DIV	2ms	1 m 40 s	1 m 40 s
500ms/DIV	5ms	4 m 10 s	4 m 10 s
1s/DIV	10ms	8 m 20 s	8 m 20 s
2s/DIV	20ms	16 m 40 s	16 m 40 s
5s/DIV	50ms	41 m 40 s	41 m 40 s
10s/DIV	100ms	1 h 23 m 20 s	1 h 23 m 20 s
30s/DIV	300ms	4 h 10 m 0 s	4 h 10 m 0 s
1min/DIV	0.6s	8 h 20 m 0 s	8 h 20 m 0 s
2min/DIV	1.2s	16 h 40 m 0 s	16 h 40 m 0 s
5min/DIV	3.0s	41 h 40 m 0 s	41 h 40 m 0 s



PC Card Type II slot with dust cover (front panel)



Communication connectors provided as standard equipment (rear panel)




# Output timing of evaluation result

[查询"8731-10"供应商](#)

## - How it works -

### External control connectors insulated from chassis

External DC power can be 12V or 24V, and control signal input also operates at this voltage. Using the internal isolated 5V power supply for control is also possible. Because the terminals are isolated from chassis ground, connection of a sequencer, relay bank, or other device with separate ground potential presents no problem.

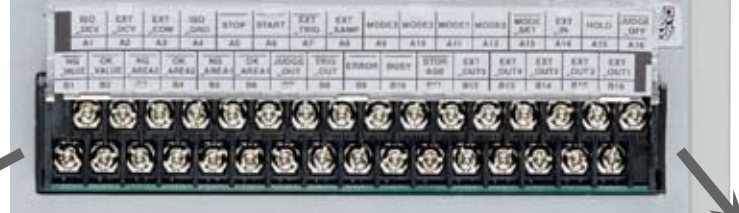

External control connectors provided as standard equipment (rear panel)

Upper terminal block (rear panel)		
Number	Terminal name	Function
A1	ISO_DC1V	Internal isolated power supply (+5V)
A2	EXT_DC1V	External power supply
A3	EXT_COM	Common output
A4	ISO_GND	Internal isolated ground
A5	STOP	Measurement stop
A6	START	Measurement start
A7	EXT_TRIG	External trigger
A8	EXT_SAMP	External sampling
A9	MODE 3	Test mode, bit 3
A10	MODE 2	Test mode, bit 2
A11	MODE 1	Test mode, bit 1
A12	MODE 0	Test mode, bit 0
A13	MODE SET	Test mode set
A14	EXT_IN	Multi-function terminal (input)
A15	HOLD	Hold evaluation/test result
A16	JUDGE OFF	Stop evaluation


  

Lower terminal block (rear panel)		
Number	Terminal name	Function
B1	NG_VALUE	Numeric evaluation: FAIL
B2	OK_VALUE	Numeric evaluation: PASS
B3	NG_AREA 2	Channel 2 area evaluation: FAIL
B4	OK_AREA 2	Channel 2 area evaluation: PASS
B5	NG_AREA 1	Channel 1 area evaluation: FAIL
B6	OK_AREA 1	Channel 1 area evaluation: PASS
B7	JUDGE_OUT	Evaluation result output active
B8	TRIG_OUT	Trigger output
B9	ERROR	Error occurred
B10	BUSY	Processing
B11	STORAGE	Measurement in progress
B12	EXT_OUT 5	Multi-function terminal 5 (output)
B13	EXT_OUT 4	Multi-function terminal 4 (output)
B14	EXT_OUT 3	Multi-function terminal 3 (output)
B15	EXT_OUT 2	Multi-function terminal 2 (output)
B16	EXT_OUT 1	Multi-function terminal 1 (output)

### Evaluation result output timing

The diagram below shows the evaluation output cycle when performing area evaluation only for a 1kHz sine wave signal. When auto store is selected, data store processing occurs after the evaluation processing step. The evaluation time and evaluation cycle for numerical processing depend on the processing type and recording duration, and also on the evaluation waveform.


#### Trigger mode: continuous

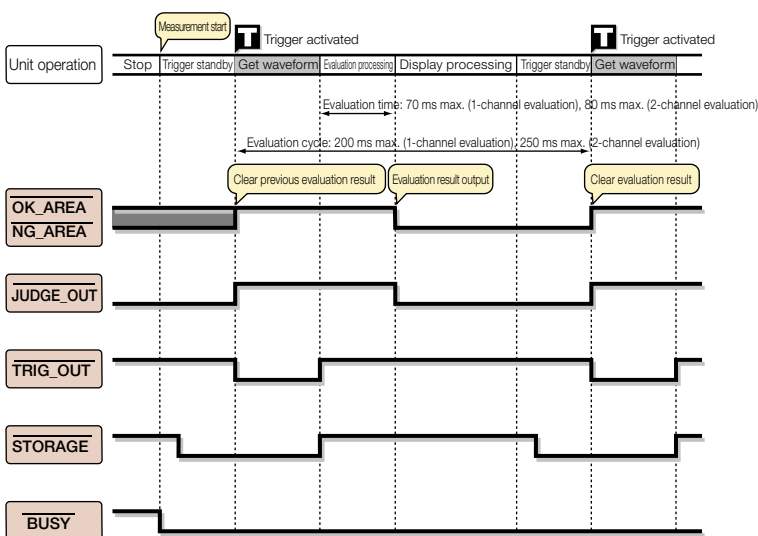

Setup:

- Time axis range: 100μs/DIV
- Recording length: 10DIV
- Display format: 1screen
- No LAN connection
- A/B cursor display set to OFF

#### Trigger mode: single

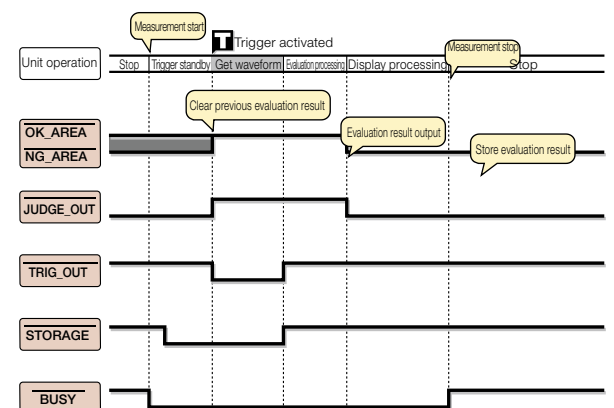

## Main unit

(Accuracy at 23 ±5°C/73 ±9°F, 30 to 80 % rh after 30 minutes of warm-up time and zero-adjust; accuracy guaranteed for 1 year)

Input	8730 (1ch type)	8731 (2ch type)
<b>Input terminals</b>	Analog 1 channel, M3.5 screw terminals, <b>Max. rated voltage to earth:</b> 30Vrms or 60V DC (with input isolated from chassis, the maximum voltage that can be applied between input channel and chassis without damage)	Analog 2 channels, M3.5 screw terminals, <b>Max. rated voltage to earth:</b> 30Vrms or 60V DC (with input isolated from chassis, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
<b>Measurement range</b> (10 DIV full-scale)	100 mV to 5 V/DIV, 6 ranges, allowable AC voltage for measurement/display: 17 Vrms Low-pass filter: 5Hz, 50Hz, 500Hz, 5kHz, 50kHz, 100kHz	
<b>Measurement resolution</b>	Data 1/160 of measurement range (using 12-bit A/D converter)	
<b>Max. sampling speed</b>	1M-Sample/sec (1μ sec period, <b>8731-10:</b> simultaneous 2-channels)	
<b>Memory capacity</b> (number of sample data)	Max. 50,000 datas for each channel (12-bit × 50 k-word/ch)	
<b>Accuracy</b>	DC amplitude: ±0.5% f.s. Zero position: ±0.1% f.s.	
<b>Frequency response</b>	DC to 400kHz (±3dB)	
<b>Input impedance/capacity</b>	1MΩ, 20pF (at 100 kHz)	
<b>Maximum input voltage</b>	30Vrms or 60V DC (CAT I, max. voltage that can be applied without damage between input terminals)	

### Display/interface

<b>Display</b>	7.2 inch STN color LCD (640 × 480 dots)
<b>Measurement screen</b>	Time axis screen: 1 or 2 screens X-Y screen (model <b>8731-10</b> only): 10 DIV × 10 DIV X-Y axis resolution: 40 dots/DIV
<b>Evaluation</b>	Waveform evaluation on reference area (2-channel individual evaluation possible at the model <b>8731-10</b> )
<b>Storage Media</b>	PC Card Type II slot, Flash ATA, max. 2 GB Setup parameters/measurement data (binary or text) /evaluation area/screen data/processing result
<b>PC interface</b>	RS-232C (9-pin D-SUB connector), LAN (10BASE-T)

### General specifications

<b>Backup functions</b> (at 25°C/ 77°F)	<b>Clock and setting conditions:</b> battery life of at least 10 years <b>Waveform data:</b> none
<b>Environmental conditions</b> (no condensation)	<b>Operation:</b> +5°C (41°F) to +40°C (104°F), 30% to 85% rh <b>Storage:</b> -10°C (14°F) to +50°C (122°F), 10% to 85% rh
<b>Compliance standard</b>	<b>Safety:</b> EN61010 <b>EMC:</b> EN61326
<b>Power requirements</b>	100 to 240V AC (50/60 Hz)
<b>Power consumption</b>	40VA, max.
<b>Dimensions and mass</b>	288mm (11.34in) W × 144mm (5.67in) H × 190mm (7.48in) D, <b>8730-10:</b> 3.6kg (127.0oz.) <b>8731-10:</b> 3.7kg (130.5oz.)
<b>Supplied accessories</b>	Instruction Manual × 1, Power cord × 1, jumper bracket × 2, external control terminal strip label × 1, Application Disk (Wave Viewer Wv, Communication Commands table) × 1



### WAVE COMPARATOR 8730-10 (1ch) WAVE COMPARATOR 8731-10 (2ch)

- Wiring hardware for signal input M3.5 terminals and control input/output M3 terminals is not supplied.
- Rack mounting capability (JIS/EIA) is available as special order. Please contact your HIOKI distributor for details.

## Function specifications

<b>Measurement functions</b>	Memory recorder with waveform evaluation function. Reference area waveform evaluation (separate 2-channels evaluation possible with the model <b>8731-10</b> )
<b>Time axis range</b>	100μs to 5 min/DIV (100 samples/DIV), 20 range settings, external sampling possible up to 1kHz, time axis resolution: 1/100 of range
<b>Waveform expansion/compression</b>	<b>Time axis:</b> ×10, ×5, ×2, ×1, ×1/2, ×1/5, ×1/10, ×1/20, ×1/50, ×1/100, <b>Voltage axis:</b> ×10, ×5, ×2, ×1, ×1/2
<b>Recording length</b>	Settable in 1 DIV steps, 10 to 500 DIV (100 points/DIV)
<b>Waveform parameter calculation</b>	Average value, peak value, maximum value, time to maximum value, minimum value, time to minimum value, rms value, cycle, frequency, rise time, fall time, area value, integer value, pulse width, duty cycle, specified level time, differential, pulse count, maximum & minimum value, (only <b>8731-10</b> , X-Y area value)
<b>Waveform processing calculations</b>	Four arithmetic operations, absolute value, half-wave rectification (from version 1.10 or later)
<b>Other functions</b>	Cursor-based measurement (A-B cursor time difference, potential difference, frequency, cursor potential, time from trigger), Scaling, variable, automatic loading of setup parameters from PC Card at power-up, automatic store, overwrite, test mode store (16 setup configurations and 16 evaluation area settings can be stored in internal memory), averaging processing (2, 4, 6, 8, 16 times)

### Trigger functions

<b>Trigger sources</b>	CH1 - CH2 (only CH1 for <b>8730-10</b> )/external (falling edge trigger)/timer. ON/OFF switching for each source; all OFF results in free-run trigger; AND/OR between trigger sources
<b>Trigger types</b> (analog)	<b>Level:</b> Digital setting of voltage. Triggered when set value is exceeded in UP or DOWN direction. <b>Window:</b> When entering or exiting a level range defined by upper or lower limit <b>Period:</b> When rising or falling edge of set voltage does not fall within cycle range
<b>Other functions</b> (trigger related)	Trigger filter (OFF/0.1 to 10DIV), trigger level resolution (0.25% f.s., full scale = 10DIV), pretrigger (0 to 100%), trigger output (open collector, active LOW)

### External control terminals

<b>Terminal type</b>	M3 screw type (isolated from chassis), <b>maximum rated voltage to earth:</b> 30Vrms or 60V DC (between inputs and chassis)
<b>Power supply terminals</b>	Maximum external input voltage $V_{EXT}$ max: 30V DC Minimum external input voltage $V_{EXT}$ min: 5V DC Internal power supply output voltage: 5V ±0.5V, 40mA (total)
<b>Input terminals</b>	External trigger, start, stop, external sampling, test mode select, hold, evaluation stop, multi-function • Signal level HIGH: ( $V_{EXT}$ -1.0) to $V_{EXT}$ [V] • Signal level LOW: 0 to 1.0 [V]
<b>Output terminals</b> (evaluation output available in 2 channels separately)	Trigger output, area evaluation 1 (PASS/FAIL), area evaluation 2 (PASS/FAIL), numeric evaluation (PASS/FAIL), evaluation output active, error, processing, measurement in progress, multi-function • Open collector: 0 to +30V, pull-up resistor 10kΩ, max. sink current 140mA • Signal level HIGH: ( $V_{EXT}$ -1.0) - $V_{EXT}$ [V] (non-load condition) • Signal level LOW: 0 to 1.0 [V]
<b>Evaluation output</b> (evaluation time/evaluation cycle determined under HIOKI sample test conditions)	<b>Evaluation mode:</b> FAIL when waveform leaves area at one point/ FAIL when waveform is fully out of area <b>Stop conditions:</b> OK, NG, OK & NG (waveform store at stop possible) <b>Evaluation time:</b> 70ms max. (1-channel evaluation), 80ms max. (2-channel evaluation) <b>Evaluation cycle:</b> 200ms max. (1-channel evaluation), 250ms max. (2-channel evaluation)



#### PC Card Precaution

Use only PC Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers. You may be unable to read from or save data to such cards.

- PC CARD 128M 9726 (128 MB capacity)
- PC CARD 256M 9727 (256 MB capacity)
- PC CARD 512M 9728 (512 MB capacity)
- PC CARD 1G 9729 (1 GB capacity)

#### Precaution for PC Card Use

The PC Cards listed at left can only be used in the WAVE COMPARATOR 8730-10/8731-10 if the firmware is Ver. 1.30 or later.



#### LAN CABLE 9642

Supplied with cross conversion cable, straight Ethernet cable, length: 5m (16.4ft)



#### LAN COMMUNICATOR 9333

Application software to create a LAN connection with Windows 95/98/Me, or Windows NT 4.0/2000/XP.

# HIOKI

HIOKI E. E. CORPORATION

#### HEAD OFFICE :

81 Koizumi, Ueda, Nagano, 386-1192, Japan  
TEL +81-268-28-0562 / FAX +81-268-28-0568  
E-mail: os-com@hioki.co.jp

#### HIOKI USA CORPORATION :

6 Corporate Drive, Cranbury, NJ 08512 USA  
TEL +1-609-409-9109 / FAX +1-609-409-9108  
E-mail: hioki@hiokiusa.com

#### HIOKI (Shanghai) Sales & Trading Co., Ltd. :

1904 Shanghai Times Square Office, 93 Huai Hai Zhong Road  
Shanghai, P.R.China POSTCODE: 200021  
TEL +86-21-6391-0090/0092 FAX +86-21-6391-0360  
E-mail: info-sh@hioki.cn

#### Beijing Office :

A-2602 Freetown, 58 Dong San Huan Nan Road  
Beijing, P.R.China POSTCODE: 100022  
TEL +86-10-5867-4080/4081 FAX +86-10-5867-4090  
E-mail: info-bj@hioki.cn

#### Guangzhou Office :

Room 303, Profit Plaza, No.76, West Huangpu Road  
Guangzhou, P.R.China POSTCODE: 510623  
TEL +86-20-38392673/2676 FAX +86-20-38392679  
E-mail: info-gz@hioki.cn

DISTRIBUTED BY