

查询"LA73052"供应商



SANYO Semiconductors

DATA SHEET

LA73052

Monolithic Linear IC

4ch 75Ω Video Driver

Overview

This LA73052 is a 4ch 75Ω Video Driver IC. The LA73052 is ideal for use the video output driver such as VCR and DVD-player equipment.

Functions

- 6dB AMP+driver (2ch)
- 2input-1output SW+6dB AMP+driver (2ch)

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC\ max}$		$\pm 7, +14$	V
Allowable power dissipation	$P_d\ max$	$T_a \leq 80^\circ\text{C}$ *	700	mW
Operating temperature	T_{opr}		-20 to +80	°C
Storage temperature	T_{stg}		-55 to +150	°C

* When mounted on a $114.3 \times 76.1 \times 1.6\text{mm}^3$ glass epoxy board.

Recommended Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommending operation voltage	V_{CC}		± 5 +9	V
Operating voltage range	$V_{CC\ op}$		± 4.0 to ± 5.5 +8 to +10	V

- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = \pm 5\text{V}$

查询 LA73052 供应商

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Current dissipation	I_{CC1}	No signal	46.8	55	63.2	mA
Voltage gain	VG	$V_{IN} = 1\text{Vp-p}$, $f = 4.43\text{MHz}$	5.7	6.2	6.7	dB
Frequency characteristics 1	$VF1$	$V_{IN} = 1\text{Vp-p}$, $f = 100\text{k/5MHz}$	-1.0	0	1.0	dB
Frequency characteristics 2	$VF2$	$V_{IN} = 1\text{Vp-p}$, $f = 100\text{k/27MHz}$		-25	-20	dB
Group delay	GD	$f = 100\text{k/4.43MHz}$		± 10	± 15	ns
Maximum output level	V_O max	$f = 1\text{kHz}$, THD = 1%	3.0	4.0		Vp-p
Control voltage H level	V_{cntH}	Pins 12, 24, 28, 30, 33 input voltage	2.5		V_{CC}	V
Control voltage L level	V_{cntL}	Pins 12, 24, 28, 30, 33 input voltage	0		1.0	V

Design guarantee items

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Video S/N	$VG1V$			-75	-70	dB
Differential Gain	DG	$V_{IN} = 1\text{Vp-p}$, RAMP signal			1.0	%
Differential Phase	DP	$V_{IN} = 1\text{Vp-p}$, RAMP signal			1.0	deg.
Mute attenuation	V_{MUTEV}	$V_{IN} = 1\text{Vp-p}$, $f = 4.43\text{MHz}$		-60	-55	dB
Cross-talk between channel	V_{CTKV}	$V_{IN} = 1\text{Vp-p}$, $f = 4.43\text{MHz}$		-60	-55	dB

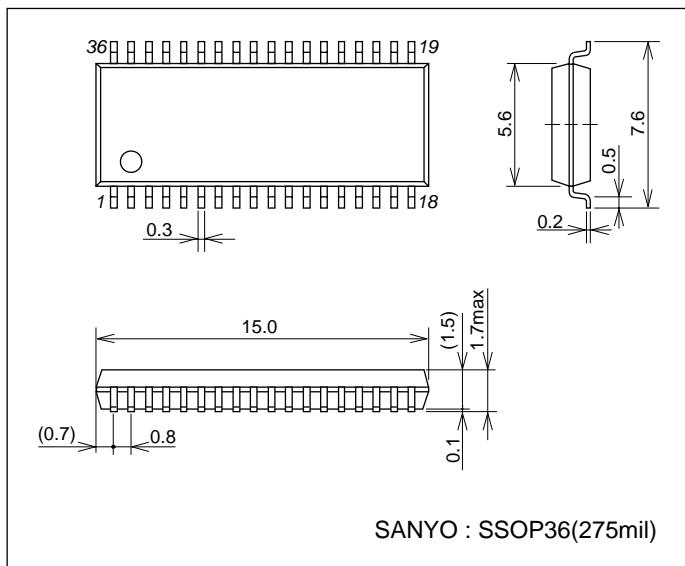
Truth Table

	Pin 12	Pin 30	Pins 24, 28, 33
H	V_{IN4A}	V_{IN1B}	THROUTH
L	V_{IN4B}	V_{IN1A}	MUTE


Package Dimensions

unit : mm

3247A




Block Diagram
[查询"LA73052"供应商](#)

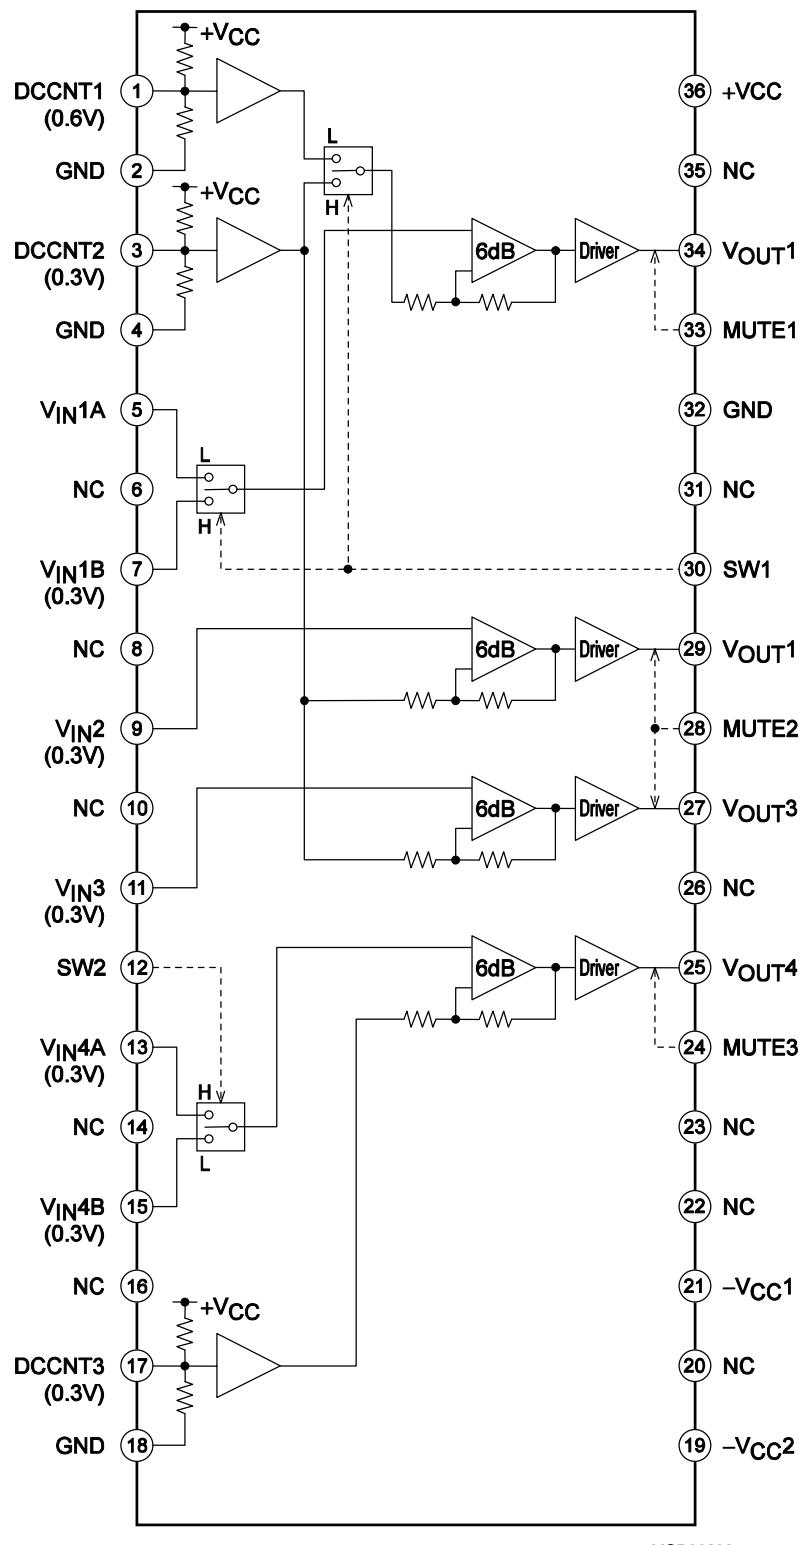

MSB06032

Test Circuit Diagram (Using \pm power supply)



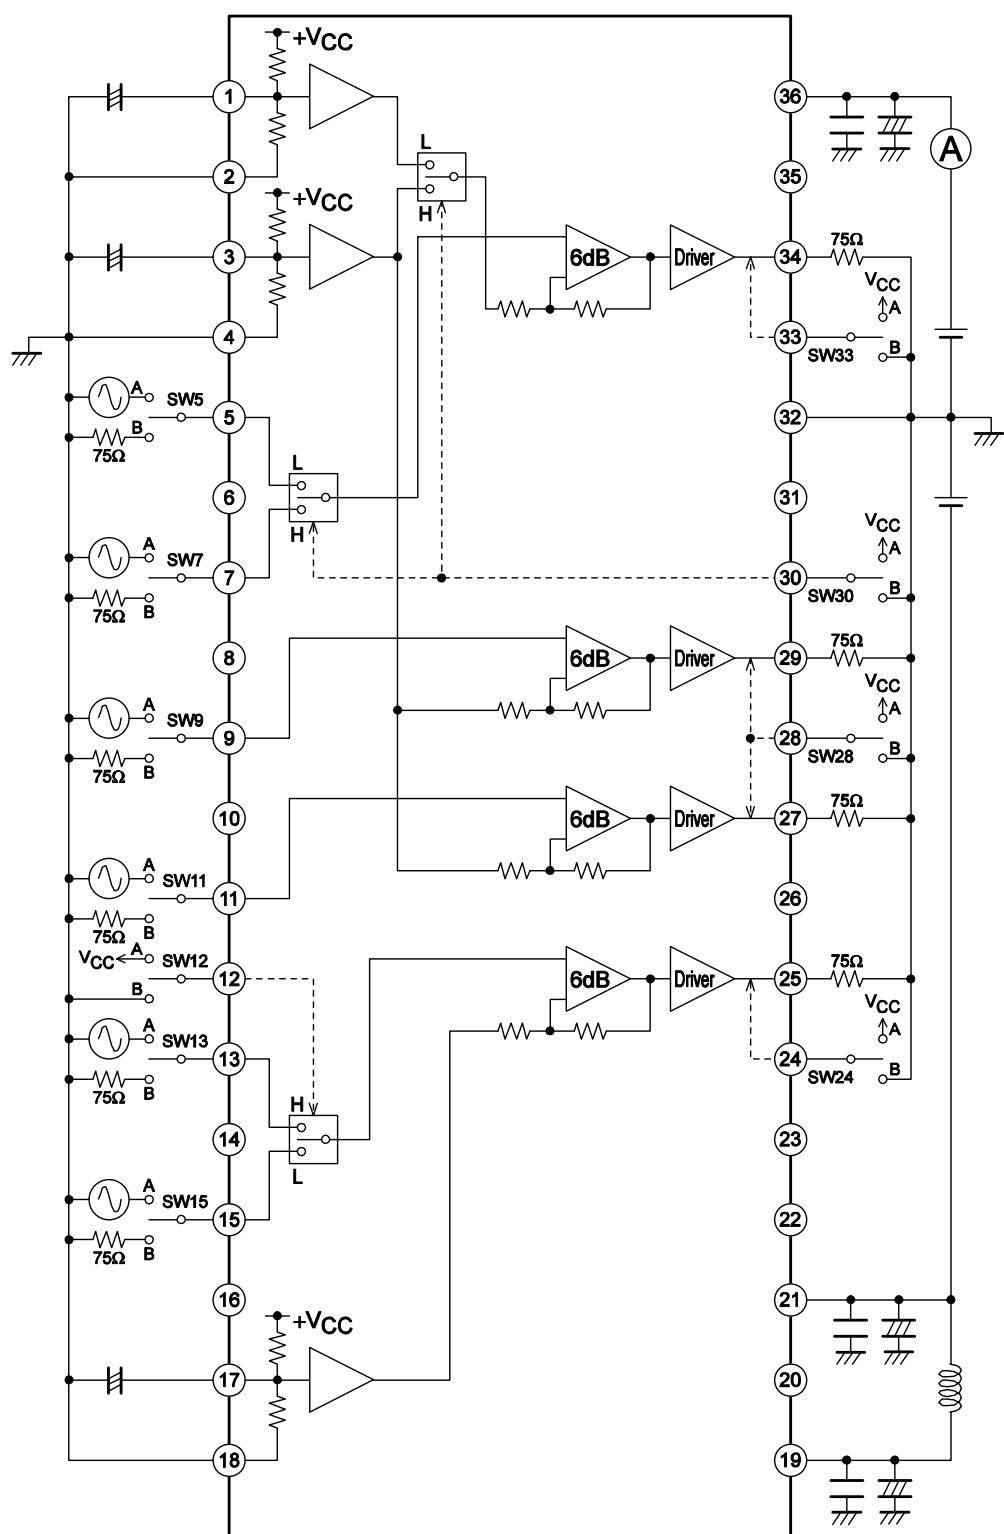
查询"LA73052"供应商



MSB06033

Pin Functions

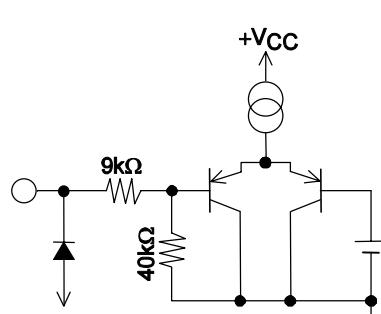
查询"LA73052"供应商

Pin No.	Pin Name	Terminal Explanation	Equivalent Circuit
1 3 17	DCCNT1 DCCNT2 DCCNT3	DC offset mode charge terminal between input and output. When a condenser is input at the position between pin 1 (DCCNT1) and GND, the operation of IC becomes the mode with 0.6V DC offset between input and output of 1ch (pins 5 and 34). Similarly when a condenser is input at the position between pin 3 (DCCNT2) and GND, it becomes the mode with 0.3V DC offset between input and output of 1, 2, 3ch (pins 7 and 34, pins 9 and 29, pins 11 and 27), and when a condenser is input at the position between pin 17 (DCCNT3) and GND, it becomes the mode with 0.3V DC offset between input and output of 4ch (pins 13 or 15, and pin 31). And when pins 1, 3, 17 and GND is shorted, it becomes the mode without DC offset between input and output.	 <p>pin2,4,18</p> <p>MSP06324</p>
2 4 18 32	GND	Both \pm power supply and +power supply are GND.	
5 7 9 11 13 15	V _{IN1A} V _{IN1B} V _{IN2} V _{IN3} V _{IN4A} V _{IN4B}	Input terminal. Non-bias. It is possible to use with being directly connected with DC. When DC coupling, it is necessary to add bias after the coupling.	 <p>MSP06323</p>
6 8 10 14 16 20 22 23 26 31 35	NC		
12 24 28 30 33	SW2 MUTE3 MUTE2 SW1 MUTE1	Changeover terminal of Mute or Input Switch When the Mute terminal is Low, it is Mute. Changeover of Input Switch is : SW1 High : V _{IN1B} Low : V _{IN1A} SW2 High : V _{IN4A} Low : V _{IN4B} When the terminal is Open, it is Low.	 <p>MSP06325</p>

Continued on next page.

Continued from preceding page.

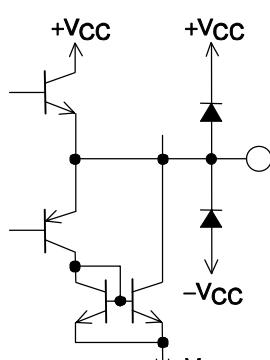查询"LA73052"供应商

Pin No.	Pin Name	Terminal Explanation	Equivalent Circuit
19 21	-VCC	-VCC of using \pm power supply. Using +power supply, it is GND.	
25 27 29 34	V _{OUT4} V _{OUT3} V _{OUT2} V _{OUT1}	Output terminal Using \pm power supply, in case of the mode with DC offset, it is possible to use without capacitor of output by setting pin 5 to 0.6V-bias and by setting pins 7, 9, 11, 13, 15 to 0.3V-bias. And in case of the mode without DC offset, it is possible to use without capacitor of output by setting each input to zero-bias. When using +power supply, both of the modes needs coupling capacitor.	 MSP06326
36	+VCC	Both \pm power supply and +power supply are +VCC.	

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, of otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 2006. Specifications and information herein are subject to change without notice.