

# RF Power Field-Effect Transistor

## N-Channel Enhancement-Mode Lateral MOSFET

Designed for W-CDMA base station applications with frequencies from 2110 to 2170 MHz. Suitable for TDMA, CDMA and multicarrier amplifier applications. Dual path topology suitable for Doherty, quadrature, single-ended and push-pull applications.


- Typical 2-Carrier W-CDMA Performance:  $V_{DD} = 28$  Volts,  $I_{DQ} = 500$  mA,  $P_{out} = 10$  Watts Avg., Full Frequency Band, Channel Bandwidth = 3.84 MHz, PAR = 8.5 dB @ 0.01% Probability on CCDF.
  - Power Gain — 14.5 dB
  - Drain Efficiency — 25.5%
  - IM3 @ 10 MHz Offset — -37 dBc in 3.84 MHz Channel Bandwidth
  - ACPR @ 5 MHz Offset — -39 dBc in 3.84 MHz Channel Bandwidth
- Capable of Handling 5:1 VSWR, @ 28 Vdc, 2140 MHz, 45 Watts CW Output Power

**Features**


- Characterized with Series Equivalent Large-Signal Impedance Parameters
- Internally Matched for Ease of Use
- Qualified Up to a Maximum of 32  $V_{DD}$  Operation
- Integrated ESD Protection
- 200°C Capable Plastic Package
- RoHS Compliant
- In Tape and Reel. R1 Suffix = 500 Units per 44 mm, 13 inch Reel.

**MRF5P21045NR1**

**2110-2170 MHz, 10 W AVG., 28 V  
2 x W-CDMA, DUAL PATH  
LATERAL N-CHANNEL  
RF POWER MOSFET**



CASE 1486-03, STYLE 1  
TO-270 WB-4

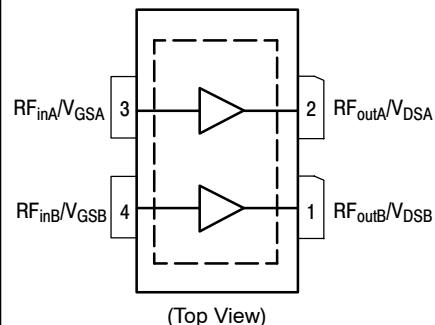

Note: Exposed backside of the package is the source terminal for the transistors.

**Figure 1. Pin Connections**

**Table 1. Maximum Ratings**

Rating	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	- 0.5, +65	Vdc
Gate-Source Voltage	$V_{GS}$	- 0.5, +15	Vdc
Storage Temperature Range	$T_{stg}$	- 65 to +150	°C
Operating Junction Temperature	$T_J$	200	°C

**Table 2. Thermal Characteristics**

Characteristic	Symbol	Value (1,2)	Unit
Thermal Resistance, Junction to Case Case Temperature 80°C, 45 W CW Case Temperature 77°C, 10 W CW	$R_{\theta JC}$	1.35 1.48	°C/W

- MTTF calculator available at <http://www.freescale.com/rf>. Select Tools/Software/Application Software/Calculators to access the MTTF calculators by product.
- Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.freescale.com/rf>. Select Documentation/Application Notes - AN1955.

**Table 3. ESD Protection Characteristics**

Test Methodology	Class
Human Body Model (per JESD22-A114)	1C (Minimum)
Machine Model (per EIA/JESD22-A115)	A (Minimum)
Charge Device Model (per JESD22-C101)	IV (Minimum)

**Table 4. Moisture Sensitivity Level**

Test Methodology	Rating	Package Peak Temperature	Unit
Per JESD 22-A113, IPC/JEDEC J-STD-020	3	260	°C


**Table 5. Electrical Characteristics** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>Off Characteristics (1)</b>					
Zero Gate Voltage Drain Leakage Current ( $V_{DS} = 65 \text{ Vdc}$ , $V_{GS} = 0 \text{ Vdc}$ )	$I_{DSS}$	—	—	10	$\mu\text{Adc}$
Zero Gate Voltage Drain Leakage Current ( $V_{DS} = 28 \text{ Vdc}$ , $V_{GS} = 0 \text{ Vdc}$ )	$I_{DSS}$	—	—	1	$\mu\text{Adc}$
Gate-Source Leakage Current ( $V_{GS} = 5 \text{ Vdc}$ , $V_{DS} = 0 \text{ Vdc}$ )	$I_{GSS}$	—	—	1	$\mu\text{Adc}$
<b>On Characteristics (1)</b>					
Gate Threshold Voltage ( $V_{DS} = 10 \text{ Vdc}$ , $I_D = 120 \mu\text{Adc}$ )	$V_{GS(\text{th})}$	2	—	3.5	$\text{Vdc}$
Gate Quiescent Voltage ( $V_{DS} = 28 \text{ Vdc}$ , $I_D = 500 \text{ mA}$ )	$V_{GS(Q)}$	—	3.8	—	$\text{Vdc}$
Fixture Gate Quiescent Voltage (2) ( $V_{DD} = 28 \text{ Vdc}$ , $I_D = 500 \text{ mA}$ , Measured in Functional Test)	$V_{GG(Q)}$	6	7.6	10	$\text{Vdc}$
Drain-Source On-Voltage ( $V_{GS} = 10 \text{ Vdc}$ , $I_D = 1.2 \text{ Adc}$ )	$V_{DS(\text{on})}$	0.2	0.3	0.35	$\text{Vdc}$
<b>Dynamic Characteristics (1,3)</b>					
Reverse Transfer Capacitance ( $V_{DS} = 28 \text{ Vdc} \pm 30 \text{ mV(rms)}$ ac @ 1 MHz, $V_{GS} = 0 \text{ Vdc}$ )	$C_{rss}$	—	0.9	—	$\text{pF}$
Output Capacitance ( $V_{DS} = 28 \text{ Vdc} \pm 30 \text{ mV(rms)}$ ac @ 1 MHz, $V_{GS} = 0 \text{ Vdc}$ )	$C_{oss}$	—	124	—	$\text{pF}$
Input Capacitance ( $V_{DS} = 28 \text{ Vdc} \pm 30 \text{ mV(rms)}$ ac @ 1 MHz, $V_{GS} = 0 \text{ Vdc}$ )	$C_{iss}$	—	247	—	$\text{pF}$

**Functional Tests (1)** (In Freescale Test Fixture, 50 ohm system)  $V_{DD} = 28 \text{ Vdc}$ ,  $I_{DQ} = 500 \text{ mA}$ ,  $P_{out} = 10 \text{ W Avg.}$ ,  $f_1 = 2112.5 \text{ MHz}$ ,  $f_2 = 2122.5 \text{ MHz}$  and  $f_1 = 2157.5 \text{ MHz}$ ,  $f_2 = 2167.5 \text{ MHz}$ , 2-Carrier W-CDMA, 3.84 MHz Channel Bandwidth Carriers. ACPR measured in 3.84 MHz Channel Bandwidth @  $\pm 5 \text{ MHz}$  Offset. IM3 measured in 3.84 MHz Bandwidth @  $\pm 10 \text{ MHz}$  Offset. PAR = 8.5 dB @ 0.01% Probability on CCDF.

Power Gain	Gps	13.5	14.5	16.5	dB
Drain Efficiency	$\eta_D$	23.5	25.5	—	%
Intermodulation Distortion	IM3	—	-37	-35	dBc
Adjacent Channel Power Ratio	ACPR	—	-39	-37	dBc
Input Return Loss	IRL	—	-12	-8	dB

1. Measurement made with device in single-ended configuration. (See Figure 4, Possible Circuit Topologies)
2.  $V_{GG} = 2 \times V_{GS(Q)}$ . Parameter measured on Freescale Test Fixture, due to resistive divider network on the board. Refer to Test Circuit schematic.
3. Part internally matched both on input and output.

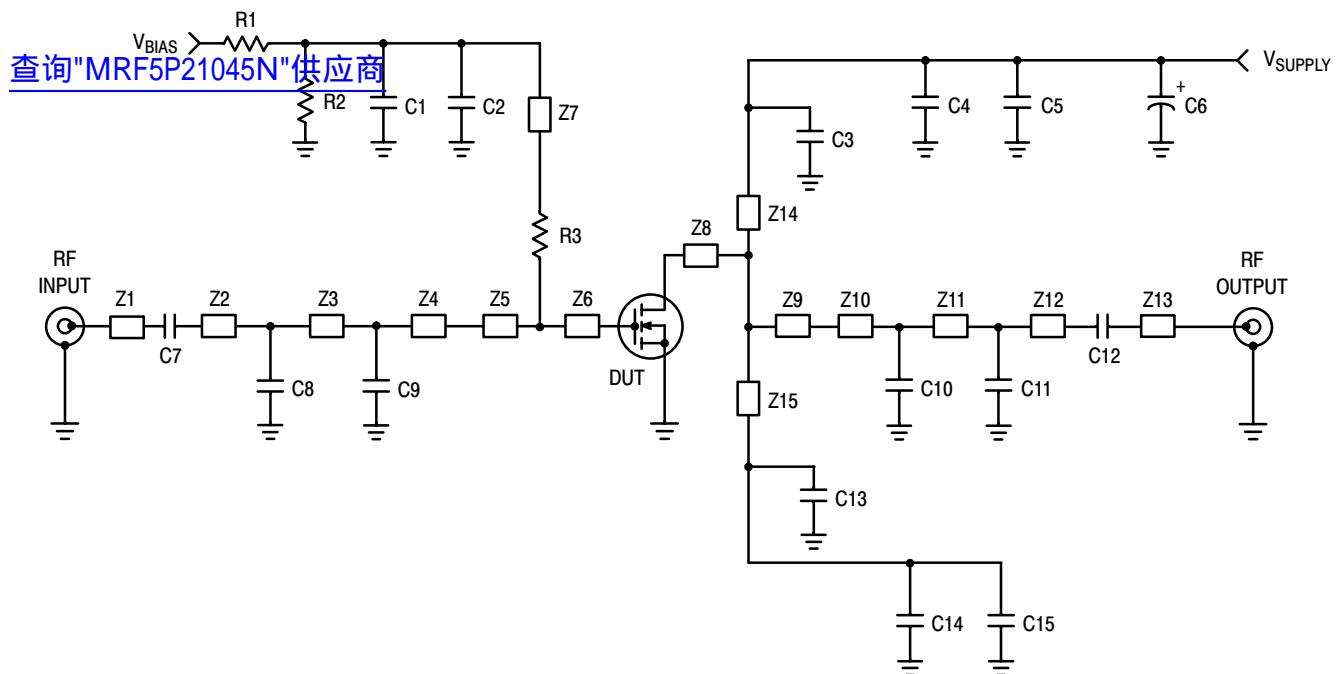

Z1, Z13	0.250" x 0.080" Microstrip	Z9	0.385" x 1.000" Microstrip
Z2	1.012" x 0.080" Microstrip	Z10	0.179" x 0.080" Microstrip
Z3	0.165" x 0.080" Microstrip	Z11	0.527" x 0.080" Microstrip
Z4	0.378" x 0.080" Microstrip	Z12	0.789" x 0.080" Microstrip
Z5	0.365" x 1.000" Microstrip	Z14, Z15	0.270" x 0.080" Microstrip
Z6, Z8	0.115" x 1.000" Microstrip	PCB	Taconic TLX8-0300, 0.030", $\epsilon_r = 2.55$
Z7	0.510" x 0.080" Microstrip		

Figure 2. MRF5P21045NR1 Test Circuit Schematic — Single-Ended Configuration

Table 6. MRF5P21045NR1 Test Circuit Component Designations and Values — Single-Ended Configuration

Part	Description	Part Number	Manufacturer
C1	220 nF Chip Capacitor	18125C224KAT4A	AVX
C2, C3, C7, C12, C13	6.8 pF Chip Capacitors	ATC100B6R8BT500XT	ATC
C4, C5, C14, C15	6.8 $\mu$ F Chip Capacitors	C4532X5R1H685MT	TDK
C6	220 $\mu$ F, 63 V Electrolytic Capacitor, Radial	EMVY630ATR221MKE0S	Nippon Chemi-Con
C8, C10	1 pF Chip Capacitors	ATC100B1R0BT500XT	ATC
C9	1.5 pF Chip Capacitor	ATC100B1R5BT500XT	ATC
C11	0.5 pF Chip Capacitor	ATC100B0R5BT500XT	ATC
R1, R2	10 k $\Omega$ , 1/4 W Chip Resistors	CRCW12061001FKTA	Vishay
R3	10 $\Omega$ , 1/4 W Chip Resistor	CRCW120610R0FKTA	Vishay

[查询"MRF5P21045N"供应商](#)

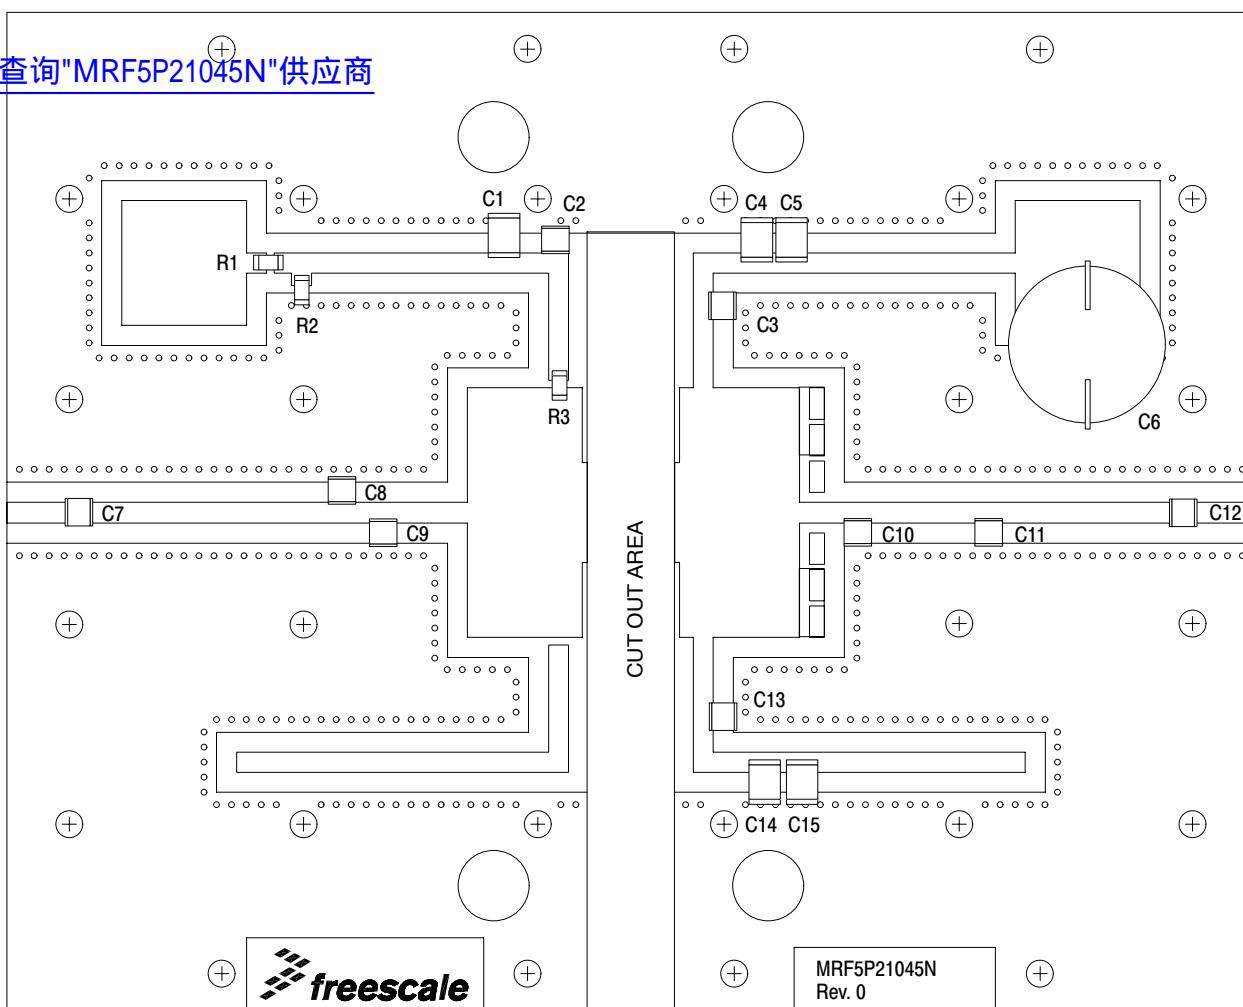


Figure 3. MRF5P21045NR1 Test Circuit Component Layout — Single-Ended Configuration


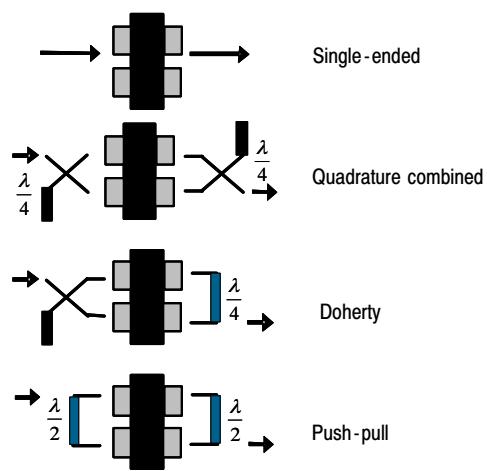



Figure 4. Possible Circuit Topologies

## TYPICAL CHARACTERISTICS


[查询"MRF5P21045N"供应商](#)

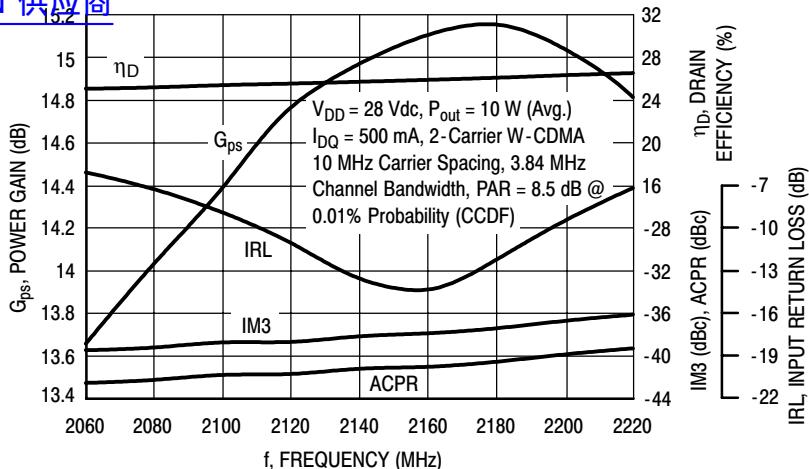


**Figure 5. 2-Carrier W-CDMA Broadband Performance  
@  $P_{out} = 10$  Watts Avg.**

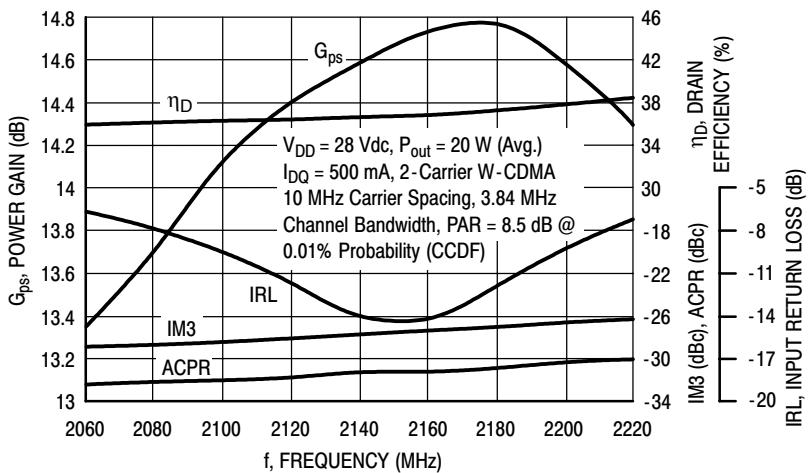

**Figure 6. 2-Carrier W-CDMA Broadband Performance  
@  $P_{out} = 20$  Watts Avg.**

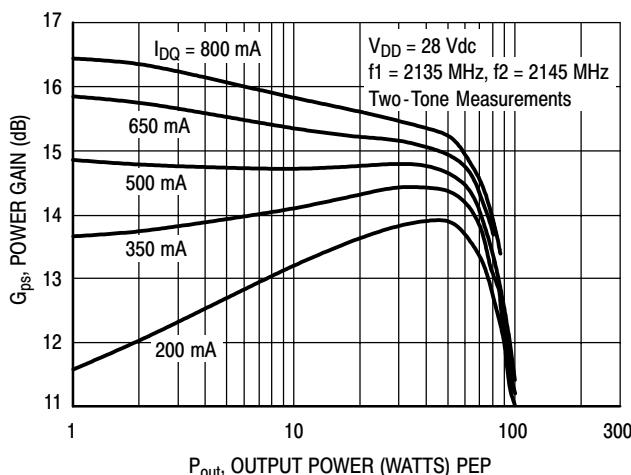


**Figure 7. Two-Tone Power Gain versus  
Output Power**

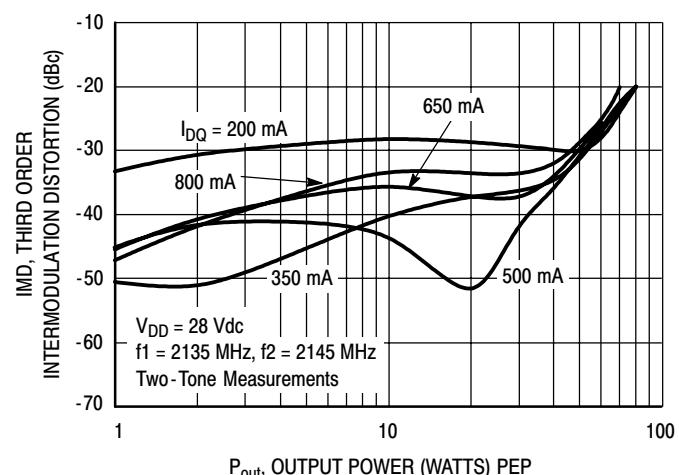


**Figure 8. Third Order Intermodulation Distortion  
versus Output Power**

## TYPICAL CHARACTERISTICS


查询" MRF5P21045N " 供应商

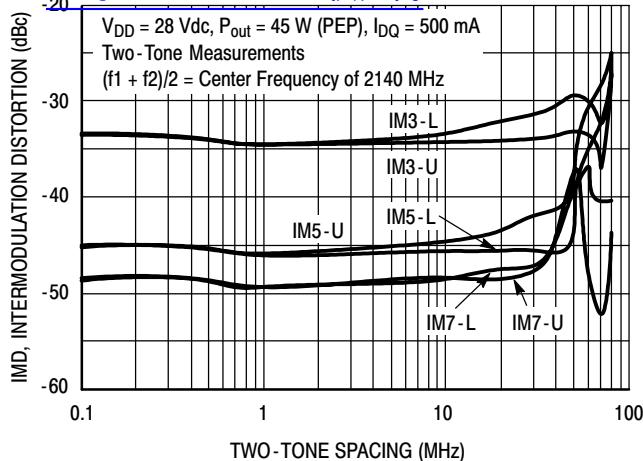


**Figure 9. Intermodulation Distortion Products versus Tone Spacing**

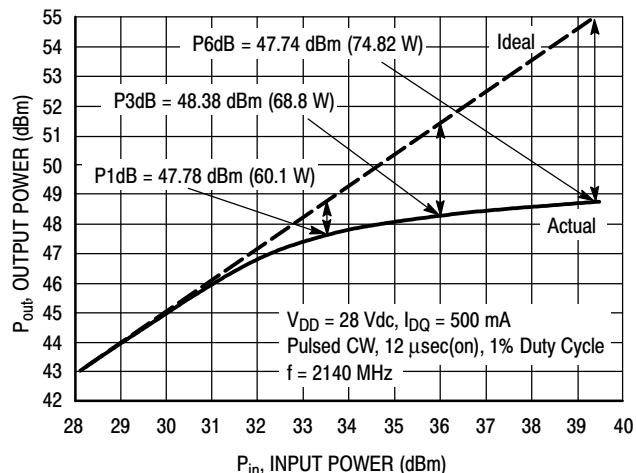

**Figure 10. Pulsed CW Output Power versus Input Power**

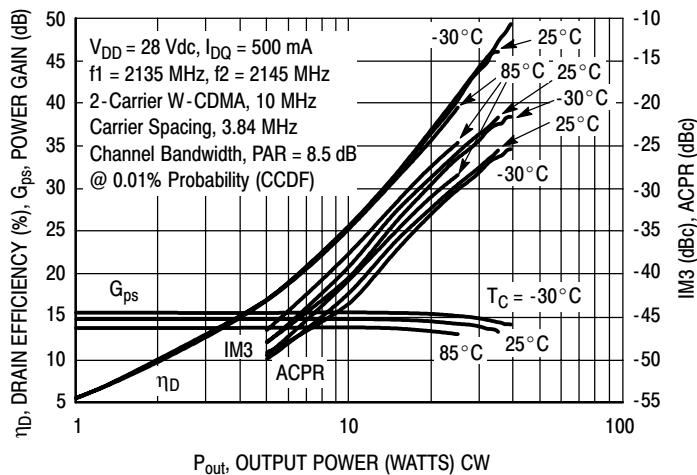

**Figure 11. 2-Carrier W-CDMA ACPR, IM3, Power Gain and Drain Efficiency versus Output Power**

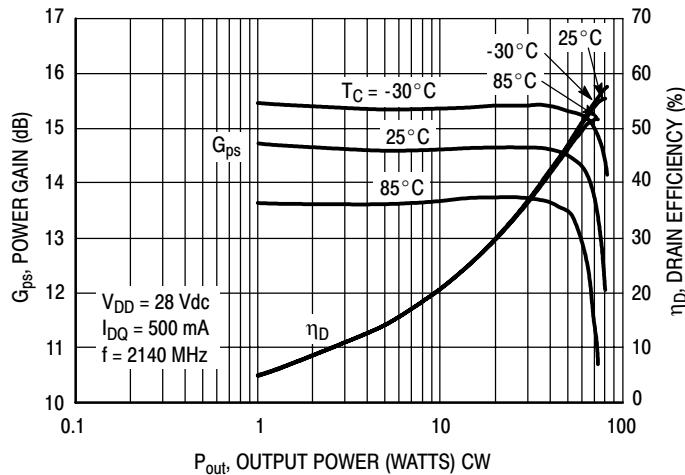

**Figure 12. Power Gain and Drain Efficiency versus CW Output Power**

## TYPICAL CHARACTERISTICS

[查询 "MRF5P21045N" 供应商](#)


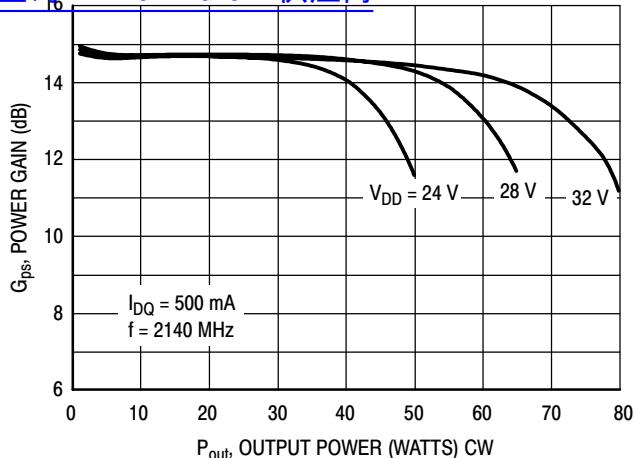


Figure 13. Power Gain versus Output Power

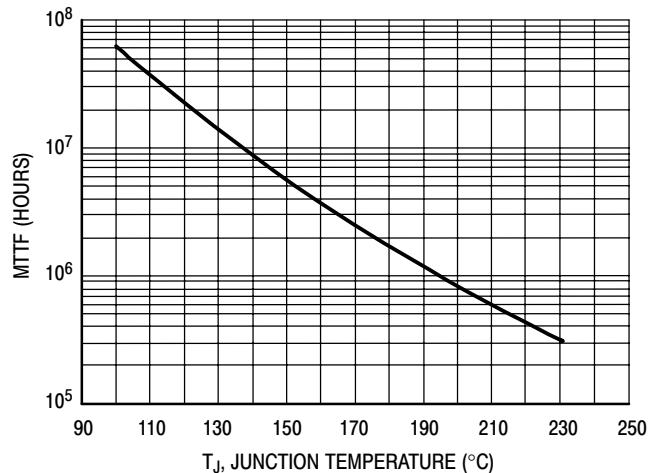

This above graph displays calculated MTTF in hours when the device is operated at V<sub>DD</sub> = 28 Vdc, P<sub>out</sub> = 10 W Avg., and η<sub>D</sub> = 25.5%.

MTTF calculator available at <http://www.freescale.com/rf>. Select Tools/Software/Application Software/Calculators to access the MTTF calculators by product.

Figure 14. MTTF versus Junction Temperature

### W-CDMA TEST SIGNAL

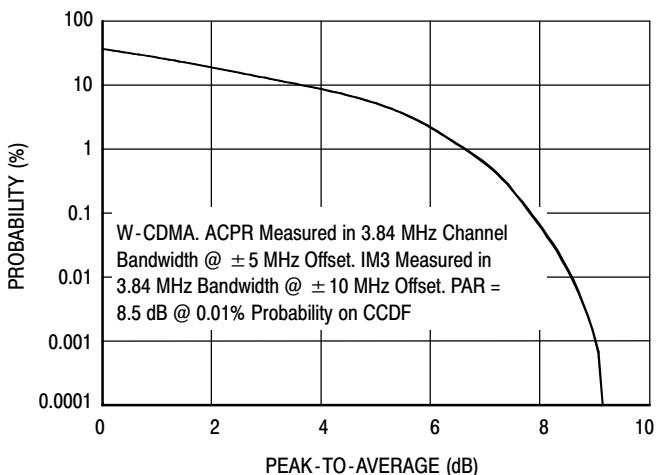


Figure 15. CCDF W-CDMA 3GPP, Test Model 1, 64 DPCH, 67% Clipping, Single-Carrier Test Signal


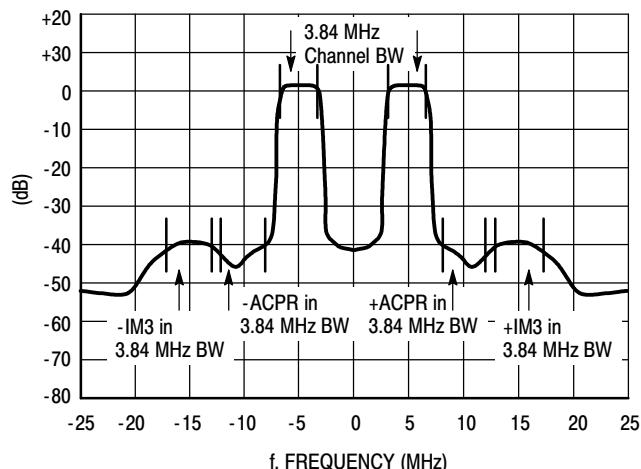


Figure 16. 2-Carrier W-CDMA Spectrum

查询“MRF5P21045N”供应商

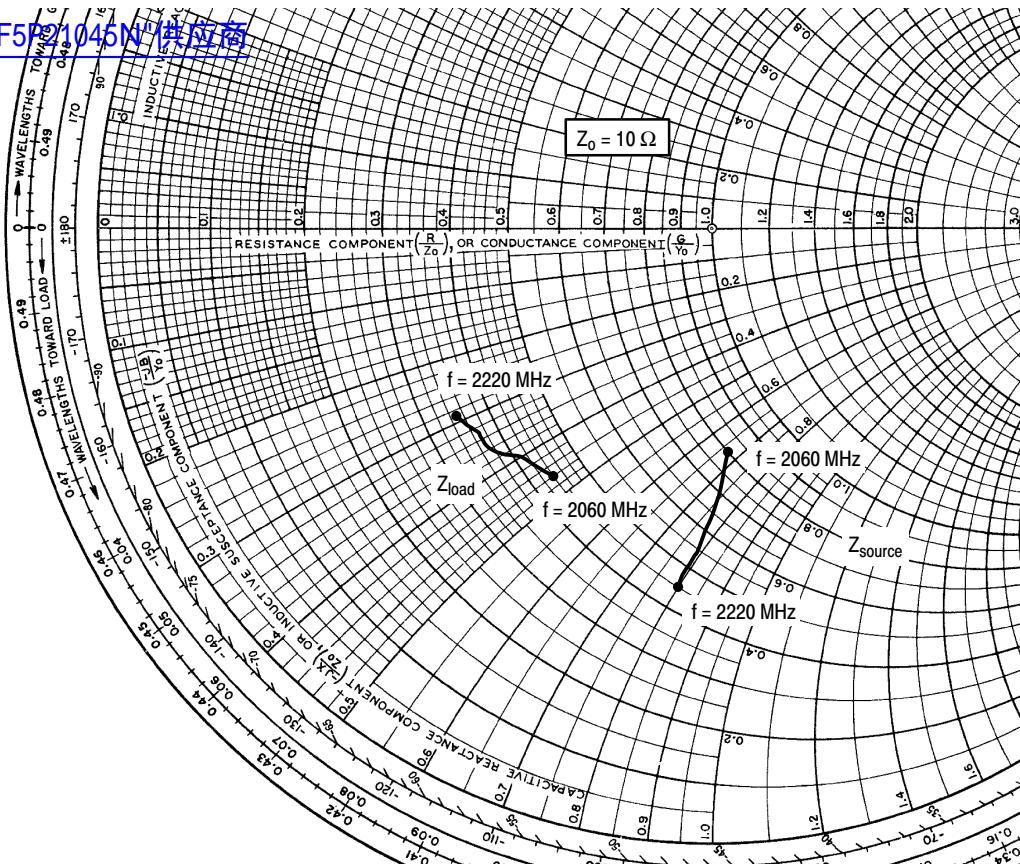

$V_{DD} = 28 \text{ Vdc}, I_{DQ} = 500 \text{ mA}, P_{\text{out}} = 10 \text{ W Avg.}$

$f$ MHz	$Z_{\text{source}}$ $\Omega$	$Z_{\text{load}}$ $\Omega$
2060	$8.01 - j6.68$	$4.38 - j4.62$
2080	$7.66 - j6.94$	$4.27 - j4.43$
2100	$7.26 - j7.20$	$4.12 - j4.04$
2120	$6.76 - j7.45$	$3.98 - j3.90$
2140	$6.28 - j7.71$	$3.81 - j3.69$
2160	$5.82 - j7.78$	$3.73 - j3.50$
2180	$5.37 - j7.85$	$3.65 - j3.30$
2200	$4.92 - j7.85$	$3.57 - j3.11$
2220	$4.46 - j7.97$	$3.49 - j2.92$

$Z_{\text{source}}$  = Test circuit impedance as measured from gate to ground.

$Z_{\text{load}}$  = Test circuit impedance as measured from drain to ground.


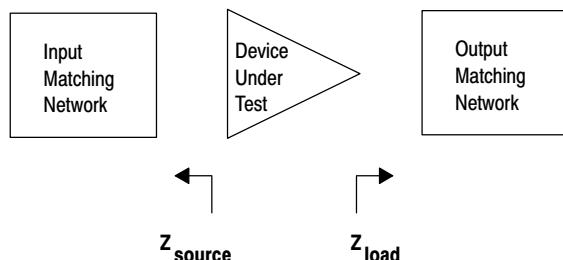


Figure 17. Series Equivalent Source and Load Impedance — Single-Ended Configuration

## PACKAGE DIMENSIONS

[查询"MRF5P21045N"供应商](#)

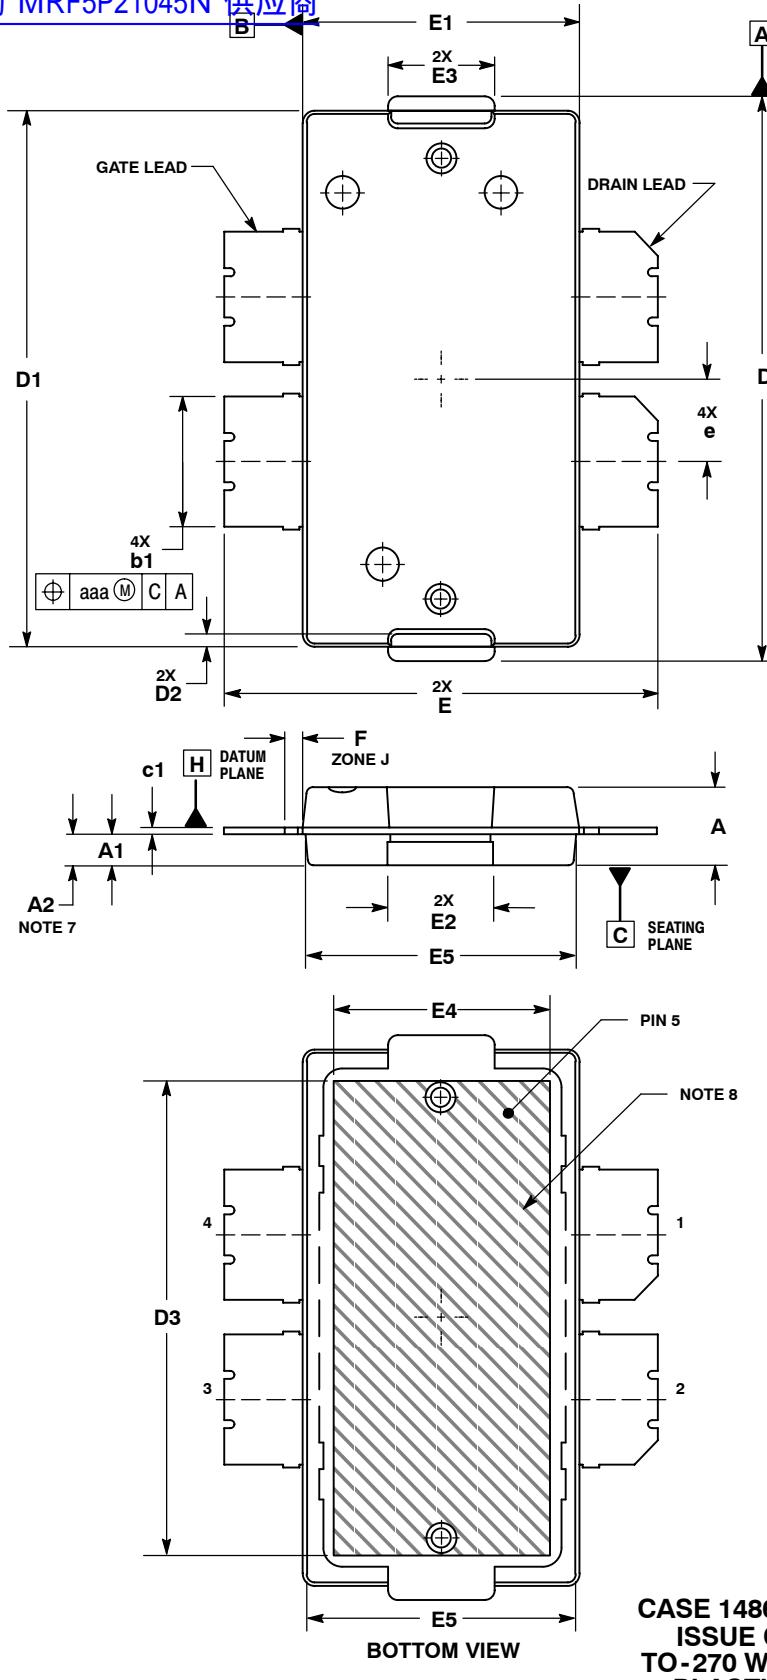

### NOTES:

- CONTROLLING DIMENSION: INCH.
- INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
- DATUM PLANE -H- IS LOCATED AT THE TOP OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE TOP OF THE PARTING LINE.
- DIMENSIONS "D" AND "E1" DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS .006 PER SIDE. DIMENSIONS "D" AND "E1" DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
- dimension "b1" DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .005 TOTAL IN EXCESS OF THE "b1" DIMENSION AT MAXIMUM MATERIAL CONDITION.
- DATUMS -A- AND -B- TO BE DETERMINED AT DATUM PLANE -H-.
- dimension A2 APPLIES WITHIN ZONE "J" ONLY.
- HATCHING REPRESENTS THE EXPOSED AREA OF THE HEAT SLUG.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.100	.104	2.54	2.64
A1	.039	.043	0.99	1.09
A2	.040	.042	1.02	1.07
D	.712	.720	18.08	18.29
D1	.688	.692	17.48	17.58
D2	.011	.019	0.28	0.48
D3	.600	---	15.24	---
E	.551	.559	14	14.2
E1	.353	.357	8.97	9.07
E2	.132	.140	3.35	3.56
E3	.124	.132	3.15	3.35
E4	.270	---	6.86	---
E5	.346	.350	8.79	8.89
F	.025 BSC	0.64 BSC		
b1	.164	.170	4.17	4.32
c1	.007	.011	0.18	0.28
e	.106 BSC	2.69 BSC		
aaa	.004	0.10		

### STYLE 1:

- PIN 1. DRAIN
2. DRAIN
3. GATE
4. GATE
5. SOURCE

## PRODUCT DOCUMENTATION

### 查询"MRF5P21045N"供应商

Refer to the following documents to aid your design process.

#### Application Notes

- AN1907: Solder Reflow Attach Method for High Power RF Devices in Plastic Packages
- AN1955: Thermal Measurement Methodology of RF Power Amplifiers
- AN3263: Bolt Down Mounting Method for High Power RF Transistors and RFICs in Over-Molded Plastic Packages

#### Engineering Bulletins

- EB212: Using Data Sheet Impedances for RF LDMOS Devices

## REVISION HISTORY

The following table summarizes revisions to this document.

Revision	Date	Description
0	April 2007	<ul style="list-style-type: none"><li>• Initial Release of Data Sheet</li></ul>

## [查询"MRF5P21045N"供应商](#)

### **How to Reach Us:**

**Home Page:**  
[www.freescale.com](http://www.freescale.com)

**Web Support:**  
<http://www.freescale.com/support>

#### **USA/Europe or Locations Not Listed:**

Freescale Semiconductor, Inc.  
Technical Information Center, EL516  
2100 East Elliot Road  
Tempe, Arizona 85284  
+1-800-521-6274 or +1-480-768-2130  
[www.freescale.com/support](http://www.freescale.com/support)

#### **Europe, Middle East, and Africa:**

Freescale Halbleiter Deutschland GmbH  
Technical Information Center  
Schatzbogen 7  
81829 Muenchen, Germany  
+44 1296 380 456 (English)  
+46 8 52200080 (English)  
+49 89 92103 559 (German)  
+33 1 69 35 48 48 (French)  
[www.freescale.com/support](http://www.freescale.com/support)

#### **Japan:**

Freescale Semiconductor Japan Ltd.  
Headquarters  
ARCO Tower 15F  
1-8-1, Shimo-Meguro, Meguro-ku,  
Tokyo 153-0064  
Japan  
0120 191014 or +81 3 5437 9125  
[support.japan@freescale.com](mailto:support.japan@freescale.com)

#### **Asia/Pacific:**

Freescale Semiconductor Hong Kong Ltd.  
Technical Information Center  
2 Dai King Street  
Tai Po Industrial Estate  
Tai Po, N.T., Hong Kong  
+800 2666 8080  
[support.asia@freescale.com](mailto:support.asia@freescale.com)

#### **For Literature Requests Only:**

Freescale Semiconductor Literature Distribution Center  
P.O. Box 5405  
Denver, Colorado 80217  
1-800-441-2447 or 303-675-2140  
Fax: 303-675-2150  
[LDCForFreescaleSemiconductor@hibbertgroup.com](mailto:LDCForFreescaleSemiconductor@hibbertgroup.com)

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners. © Freescale Semiconductor, Inc. 2007. All rights reserved.

