

Powered by ICminer.com Electronic-Library Service Copyright 2003

查询"74HCT162D-T"供应商

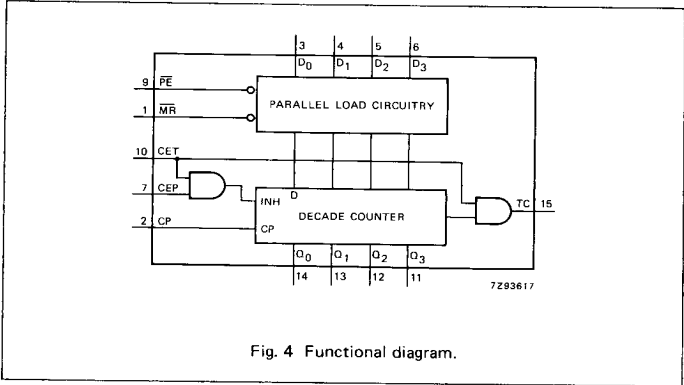


Fig. 4 Functional diagram.

PIN DESCRIPTION

PIN NO.	SYMBOL	NAME AND FUNCTION
1	MR	synchronous master reset (active LOW)
2	CP	clock input (LOW-to-HIGH, edge-triggered)
3, 4, 5, 6	D ₀ to D ₃	data inputs
7	CEP	count enable input
8	GND	ground (0 V)
9	PE	parallel enable input (active LOW)
10	CET	count enable carry input
14, 13, 12, 11	Q ₀ to Q ₃	flip-flop outputs
15	TC	terminal count output
16	VCC	positive supply voltage

FUNCTION TABLE

OPERATING MODE	INPUTS					OUTPUTS		
	MR	CP	CEP	CET	PE	D _n	Q _n	TC
reset (clear)	L	↑	X	X	X	X	L	L
parallel load	h	↑	X	X	L	L	L	L
	h	↑	X	X	L	h	H	*
count	h	↑	h	h	h	X	count	*
hold (do nothing)	h	X	L	X	h	X	q _n	*
	h	X	X	L	h	X	q _n	L

Note to function table

* The TC output is HIGH when CET is HIGH and the counter is at terminal count (HLLH).

H = HIGH voltage level

h = HIGH voltage level one set-up time prior to the LOW-to-HIGH CP transition

L = LOW voltage level

L = LOW voltage level one set-up time prior to the LOW-to-HIGH CP transition

q = lower case letters indicate the state of the referenced output one set-up time prior to the LOW-to-HIGH CP transition

X = don't care

↑ = LOW-to-HIGH CP transition

GENERAL DESCRIPTION

A LOW level at the master reset input (MR) sets all four outputs of the flip-flops (Q₀ to Q₃) to LOW level after the next positive-going transition on the clock (CP) input (provided that the set-up and hold time requirements for MR are met). This action occurs regardless of the levels at PE, CET and CEP inputs.

This synchronous reset feature enables the designer to modify the maximum count with only one external NAND gate.

The look-ahead carry simplifies serial cascading of the counters. Both count enable inputs (CEP and CET) must be HIGH to count. The CET input is fed forward to enable the terminal count output (TC). The TC output thus enabled will produce a HIGH output pulse of a duration approximately equal to a HIGH level output of Q₀. This pulse can be used to enable the next cascaded stage.

The maximum clock frequency for the cascaded counters is determined by the CP to TC propagation delay and CEP to CP set-up time, according to the following formula:

$$f_{\max} = \frac{1}{t_{P(\max)} (\text{CP to TC}) + t_{SU} (\text{CEP to CP})}$$

[查询"74HCT162D-T"供应商](#)




Fig. 5 State diagram.

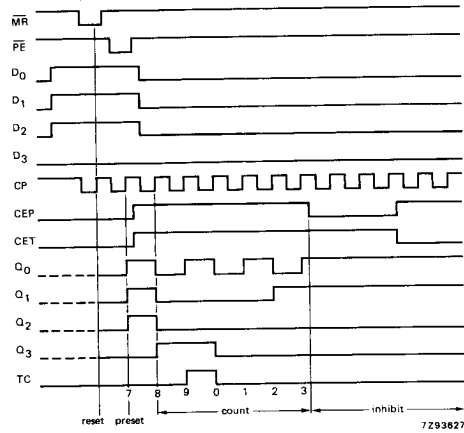


Fig. 6 Typical timing sequence: reset outputs to zero; preset to BCD seven; count to eight, nine, zero, one, two and three; inhibit.

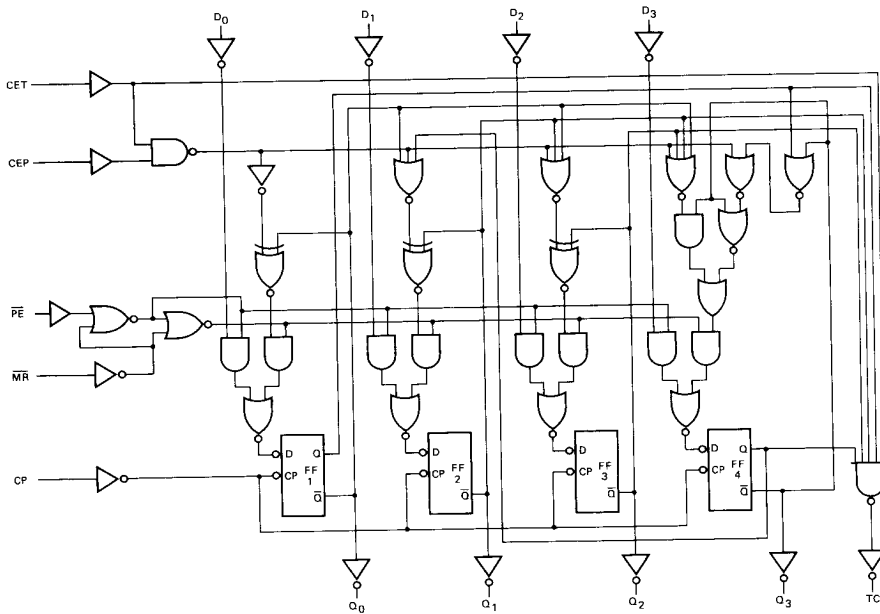


Fig. 7 Logic diagram.

[查询"74HCT162D-T"供应商](#)**DC CHARACTERISTICS FOR 74HC**

For the DC characteristics see chapter "HCMOS family characteristics", section "Family specifications".

Output capability: standard

I_{CC} category: MSI

AC CHARACTERISTICS FOR 74HC

GND = 0 V; t_r = t_f = 6 ns; C_L = 50 pF

SYMBOL	PARAMETER	T _{amb} (°C)								UNIT	TEST CONDITIONS	
		74HC									V _{CC} V	WAVEFORMS
		+25			—40 to +85		—40 to +125					
		min.	typ.	max.	min.	max.	min.	max.				
t _{PHL} / t _{PLH}	propagation delay CP to Q _n		58 21 17	190 38 32		240 48 41		285 57 48	ns	2.0 4.5 6.0	Fig. 8	
t _{PHL} / t _{PLH}	propagation delay CP to TC		69 25 20	215 43 37		270 54 46		325 65 55	ns	2.0 4.5 6.0	Fig. 8	
t _{PHL} / t _{PLH}	propagation delay CET to TC		39 14 11	150 30 26		190 38 33		225 45 38	ns	2.0 4.5 6.0	Fig. 9	
t _{THL} / t _{TLH}	output transition time		19 7 6	75 15 13		95 19 16		110 22 19	ns	2.0 4.5 6.0	Figs 8 and 9	
t _W	clock pulse width HIGH or LOW	80 16 14	22 8 6		100 20 17		120 24 20		ns	2.0 4.5 6.0	Fig. 8	
t _{su}	set-up time MR, D _n to CP	100 20 17	28 10 8		125 25 21		150 30 26		ns	2.0 4.5 6.0	Figs 10 and 11	
t _{su}	set-up time PE to CP	135 27 23	39 14 11		170 34 29		205 41 35		ns	2.0 4.5 6.0	Fig. 10	
t _{su}	set-up time CEP, CET to CP	200 40 34	69 25 20		250 50 43		300 60 51		ns	2.0 4.5 6.0	Fig. 12	
t _h	hold time D _n , $\overline{PE}$, CEP, CET, MR to CP	0 0 0	—17 —6 —5		0 0 0		0 0 0		ns	2.0 4.5 6.0	Figs 10, 11 and 12	
f _{max}	maximum clock pulse frequency	6.0 30 35	19 57 68		4.8 24 28		4.0 20 24		MHz	2.0 4.5 6.0	Fig. 8	

[查询"74HCT162D-T"供应商](#)**DC CHARACTERISTICS FOR 74HCT**

For the DC characteristics see chapter "HCMOS family characteristics", section "Family specifications".

Output capability: standard

I_{CC} category: MSI

Note to HCT types

The value of additional quiescent supply current (ΔI_{CC}) for a unit load of 1 is given in the family specifications. To determine ΔI_{CC} per input, multiply this value by the unit load coefficient shown in the table below.

INPUT	UNIT LOAD COEFFICIENT	INPUT	UNIT LOAD COEFFICIENT
$\overline{MR}$	0.95	D_n	0.25
CP	0.80	CET	1.05
CEP	0.25	PE	0.30

AC CHARACTERISTICS FOR 74HCT

GND = 0 V; $t_r = t_f = 6$ ns; $C_L = 50$ pF

SYMBOL	PARAMETER	T _{amb} (°C)								UNIT	TEST CONDITIONS	
		74HCT									V _{CC} V	WAVEFORMS
		+25			-40 to +85		-40 to +125					
		min.	typ.	max.	min.	max.	min.	max.				
t _{PHL} / t _{PLH}	propagation delay CP to Q _n		24	43		54		65	ns	4.5	Fig. 8	
t _{PHL}	propagation delay CP to TC		30	51		64		77	ns	4.5	Fig. 8	
t _{PLH}	propagation delay CP to TC		22	45		56		68	ns	4.5	Fig. 8	
t _{PHL}	propagation delay CET to TC		18	35		44		53	ns	4.5	Fig. 9	
t _{PLH}	propagation delay CET to TC		12	24		30		36	ns	4.5	Fig. 9	
t _{THL} / t _{TLH}	output transition time		7	15		19		22	ns	4.5	Figs 8 and 9	
t _W	clock pulse width HIGH or LOW	16	7		20		24		ns	4.5	Fig. 8	
t _{su}	set-up time D _n to CP	20	9		25		30		ns	4.5	Fig. 10	
t _{su}	set-up time PE to CP	35	16		44		53		ns	4.5	Fig. 10	
t _{su}	set-up time CEP, CET to CP	40	23		50		60		ns	4.5	Fig. 12	
t _{su}	set-up time MR to CP	20	12		25		30		ns	4.5	Fig. 11	
t _h	hold time D _n , PE, CEP, CET, MR to CP	0	-10		0		0		ns	4.5	Figs 10, 11 and 12	
f _{max}	maximum clock pulse frequency	17	29		14		11		MHz	4.5	Fig. 8	

查询"74HCT162D-T"供应商

AC WAVEFORMS

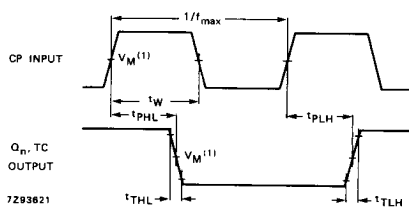


Fig. 8 Waveforms showing the clock (CP) to outputs (Q_n , TC) propagation delays, the clock pulse width, the output transition times and the maximum clock frequency.

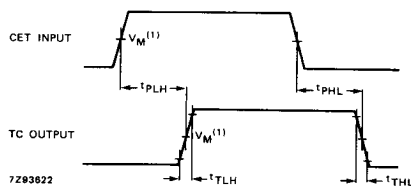


Fig. 9 Waveforms showing the input (CET) to output (TC) propagation delays and output transition times.

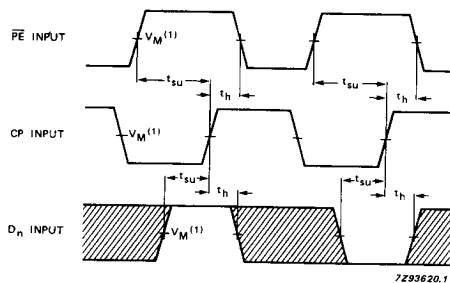


Fig. 10 Waveforms showing the set-up and hold times for the input (D_n) and parallel enable input (PE).

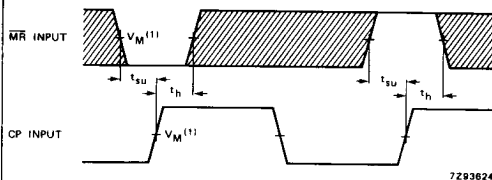


Fig. 11 Waveforms showing the $\overline{MR}$ set-up and hold times.

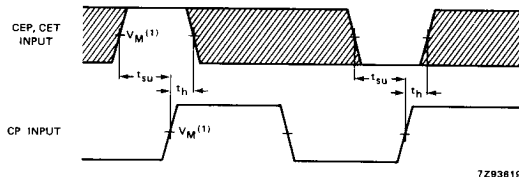


Fig. 12 Waveforms showing the CEP and CET set-up and hold times.

Note to Figs 10, 11 and 12

The shaded areas indicate when the input is permitted to change for predictable output performance.

Note to AC waveforms

(1) HC : $V_M = 50\%$; $V_I = \text{GND}$ to V_{CC} .

HCT: $V_M = 1.3\text{ V}$; $V_I = \text{GND}$ to 3 V .

[查询"74HCT162D-T"供应商](#)

APPLICATION INFORMATION

The HC/HCT162 facilitate designing counters of any modulus with minimal external logic.

The output is glitch-free due to the synchronous reset.

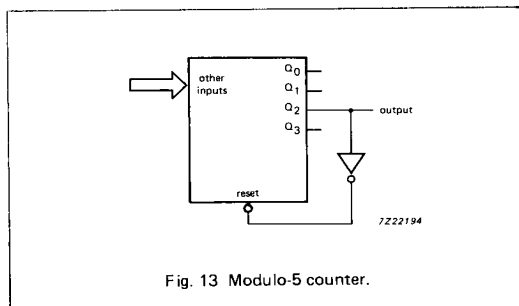


Fig. 13 Modulo-5 counter.