




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF OSPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS				DOC. NO. SPC-F005 * Effective 7/8/02 * DCP No. 1398			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD DATE
XX	XX	XXXX	XXXX	30-09-08	XXXX	30-09-08	30-09-08
XXXX	XXXX		XXXX	30-09-08	XXXX	30-09-08	30-09-08

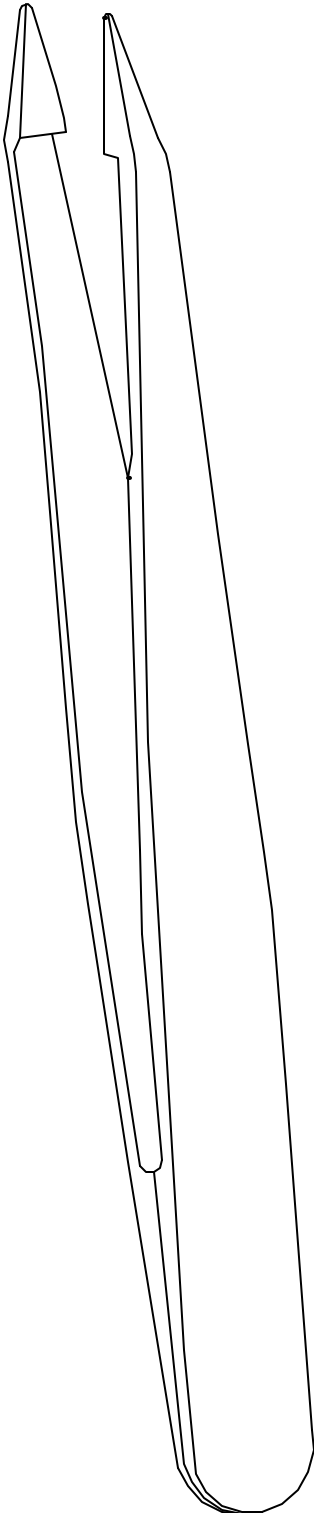

Features & Specifications

- Tips do not spread under pressure
- Overall length 4 1/2" (115mm)
- No contamination
- Non magnetic
- Static dissipative (106 - 109 DHM/SQ)

Applications

Ideal for handling semi-conductors, silicone chips, and delicate wafers. Static dissipative tweezers are ideal for use with sensitive components where ESD damage is a concern.



DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.		TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.			
DRAWN BY:	DATE:	DRAWING TITLE: Tweezers			
XXXX	30-09-08				
CHECKED BY:	DATE:				
XXXX	30-09-08				
APPROVED BY:	DATE:				
XXXX	30-09-08	SIZE	DWG. NO.	ELECTRONIC FILE	REV
		A	1351	92N3632	XX
SCALE: NTS		U.D.M., INCHES [mm]		SHEET: 1 OF 1	