


## Description

The MIM-5xx5K2 is miniaturized infrared receivers for remote control and other applications requiring improved ambient light rejection. The separate PIN diode and preamplifier IC are assembled on a single leadframe. The epoxy package contains a special IR filter. This module has excellent performance even in disturbed ambient light applications and provides protection against uncontrolled output pulses.

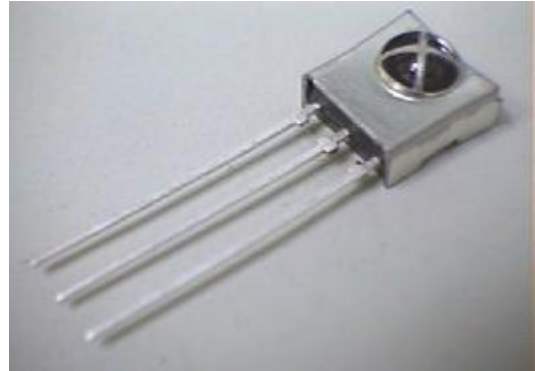


## Features

- Photo detector and preamplifier in one package
- Internal filter for PCM frequency
- High immunity against ambient light
- Improved shielding against electric field disturbance
- 5.0-Volt supply voltage; low power consumption
- TTL and CMOS compatibility

## MIM-5xx5K2 Series Models

- MIM-5335K2 33.0KHz
- MIM-5365K2 36.0KHz
- MIM-5375K2 36.7KHz
- MIM-5385K2 38.0KHz
- MIM-5565K2 56.7KHz

## BLOCK DIAGRAM

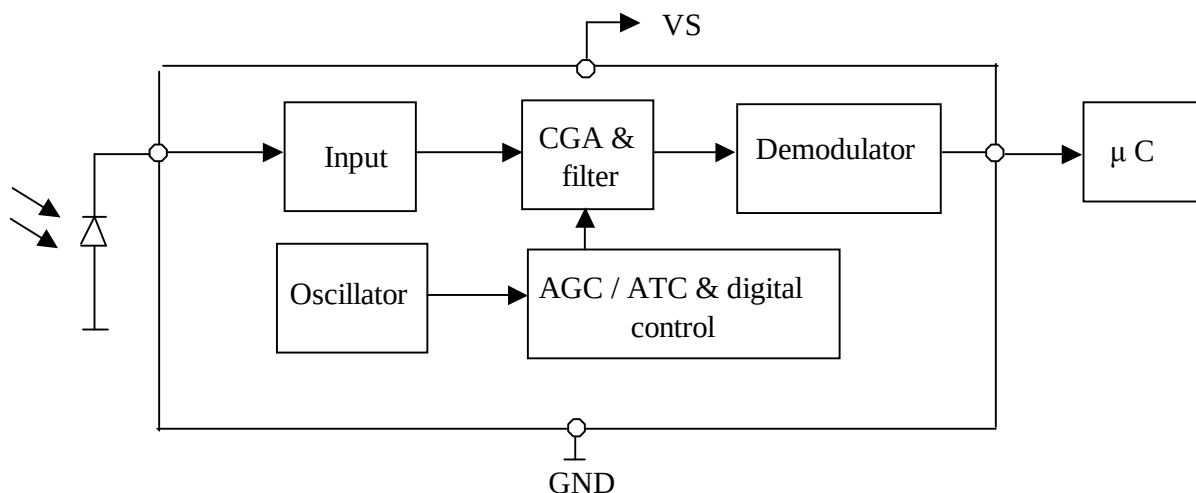

# Absolute Maximum Ratings

@ Ta=25°C

| Item                  | Symbol           | Ratings    | Unit | Remark                 |
|-----------------------|------------------|------------|------|------------------------|
| Supply voltage        | V <sub>s</sub>   | -0.3 ~ 5.5 | V    |                        |
| Supply Current        | I <sub>s</sub>   | 2.5        | mA   |                        |
| Operating temperature | T <sub>opr</sub> | -25 ~ + 85 | °C   |                        |
| Storage temperature   | T <sub>stg</sub> | -25 ~ + 85 | °C   |                        |
| Soldering temperature | T <sub>sd</sub>  | 260        | °C   | t ≤ 5 s, 1mm from case |

# Electro-optical characteristics (Vcc=5.0V)

(T<sub>a</sub>=25°C )

| Parameter                           | Symbol                        | Min. | Typ. | Max. | Unit | Remarks              |
|-------------------------------------|-------------------------------|------|------|------|------|----------------------|
| Supply Voltage                      | V <sub>s</sub>                | 4.5  | 5.0  | 5.5  | V    |                      |
| Current consumption                 | I <sub>cc</sub>               |      | 1.6  | 2.0  | mA   | Under no signal      |
| Response wavelength                 | λ <sub>p</sub>                |      | 940  |      | nm   |                      |
| Output form                         | ----- active low output ----- |      |      |      |      |                      |
| H level output voltage              | V <sub>oh</sub>               | 4.2  |      |      | V    |                      |
| L level output voltage              | V <sub>ol</sub>               |      |      | 0.5  | V    |                      |
| H level output pulse width          | T <sub>wh</sub>               | 400  |      | 800  | μs   |                      |
| L level output pulse width          | T <sub>wl</sub>               | 400  |      | 800  | μs   |                      |
| Distance between emitter & detector | L                             | 10.0 |      |      | m    | NOTE 1               |
| Half angle                          | Δθ                            |      | ±45  |      | deg  | Horizontal direction |

## Test Method

### A. Standard Transmitter

ON/OFF pulse width satisfied from 25 cm to detection limit

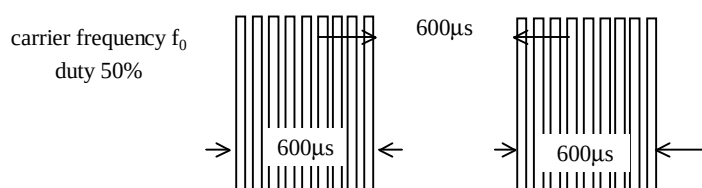


Fig 1. Burst Wave



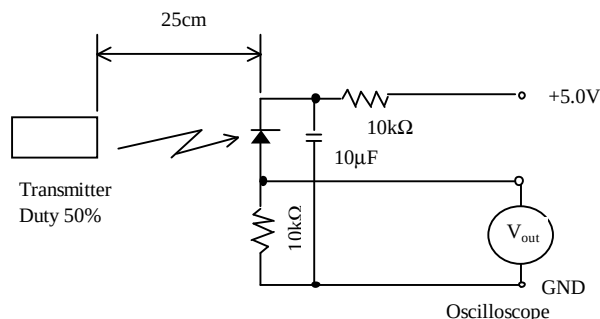


Fig 2. Standard Transmitter Measurement circuit


## B. Detection Length Test

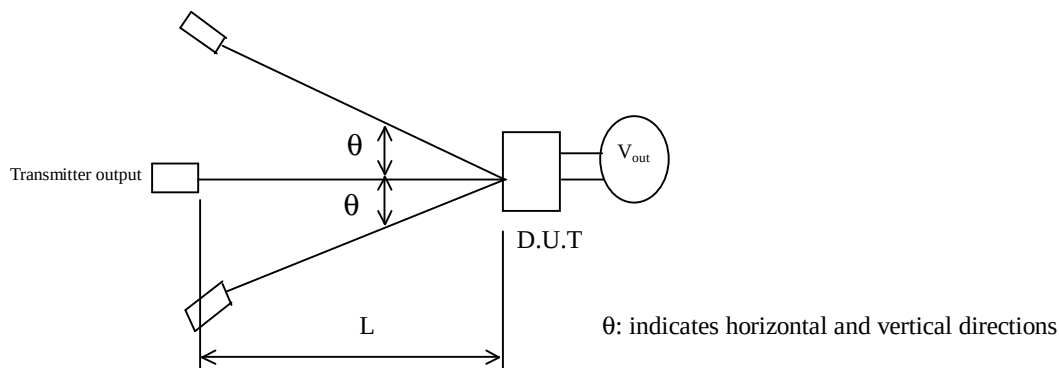

## C . Pulse Width Test

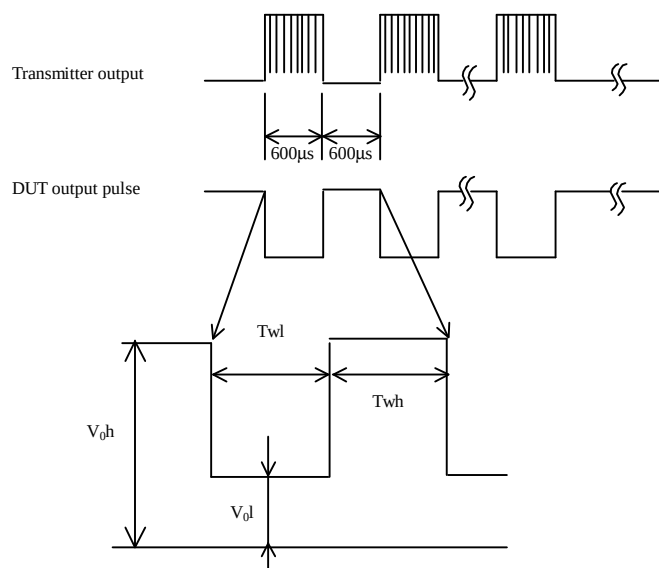


## Application Circuit

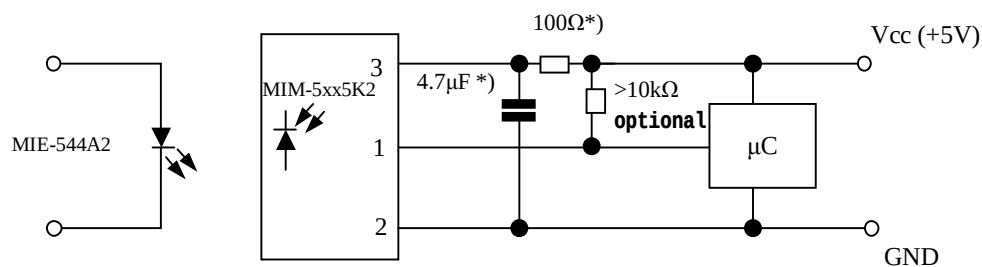


\*) recommended to suppress power supply disturbances

Dimensions in mm

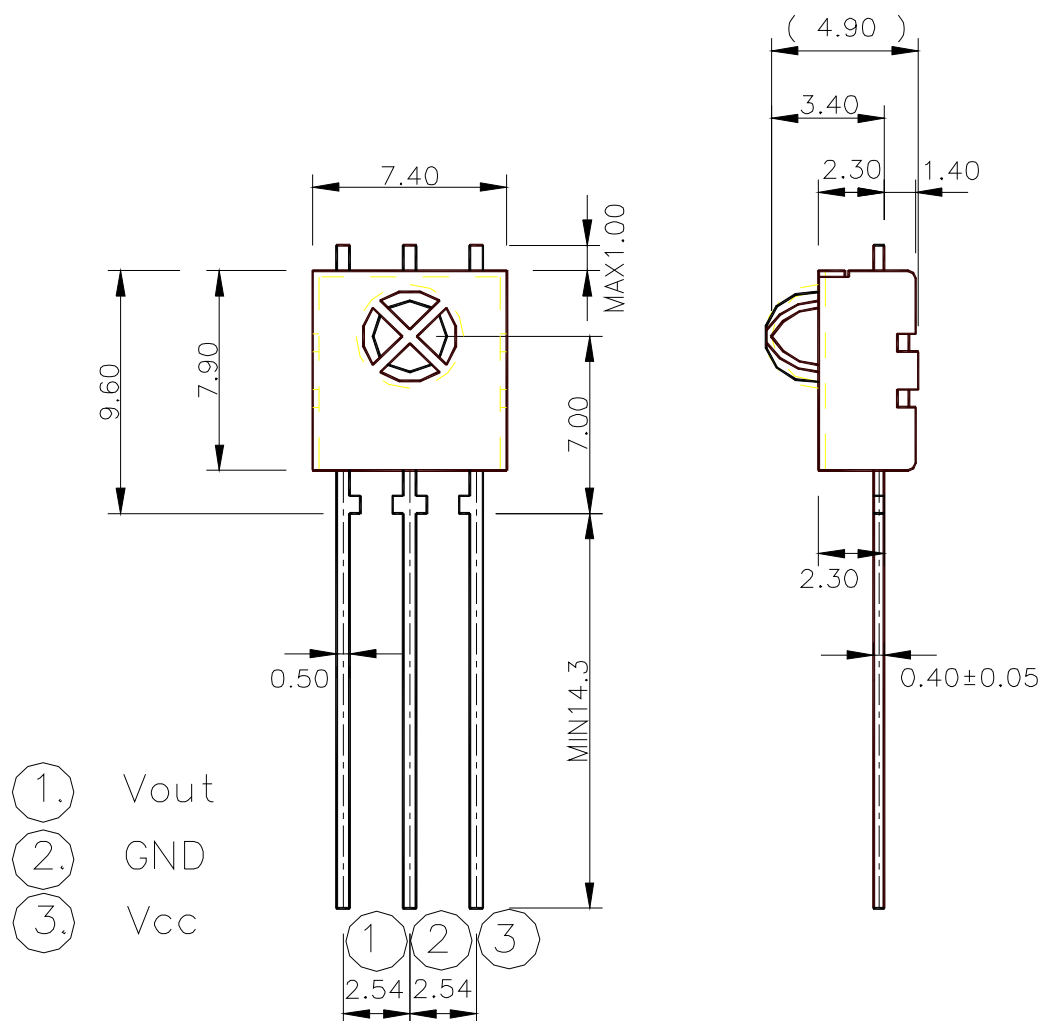


Ps 1. TOLERANCE :  $\pm 0.30$  UNLESS OTHERWISE SPECIFIED


CHARACTERISTIC CURVES ( $T_A=25^\circ\text{C}$ )

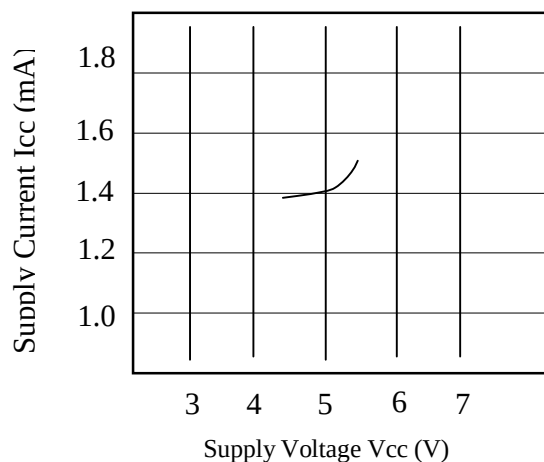


SUPPLY VOLTAGE vs. SUPPLY CURRENT

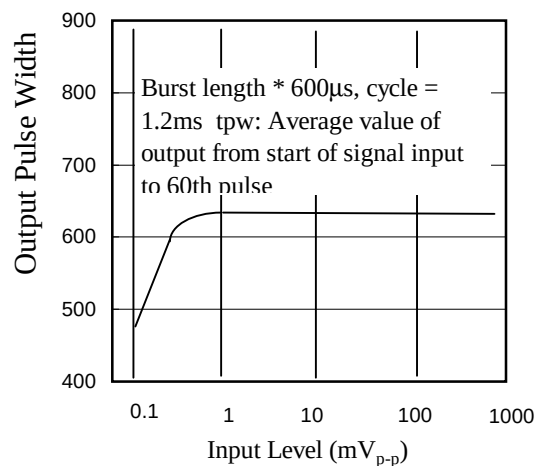


INPUT LEVEL vs. OUTPUT PULSE WIDTH

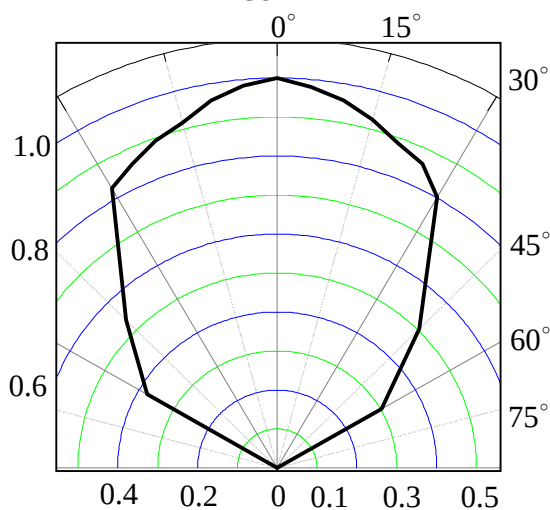

RELATIVE TRANSMISSION

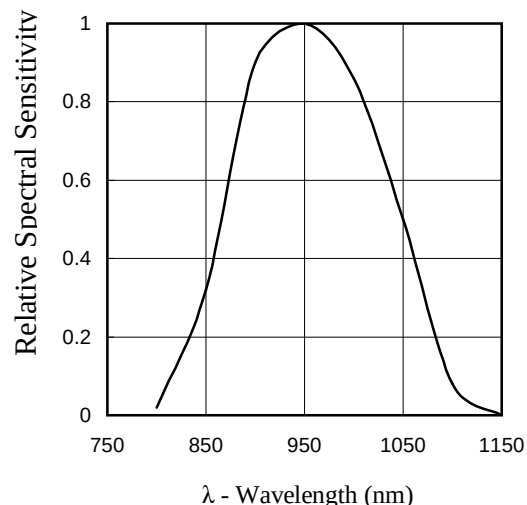

RELATIVE SPECTRAL SENSITIVITY vs WAVELENGTH

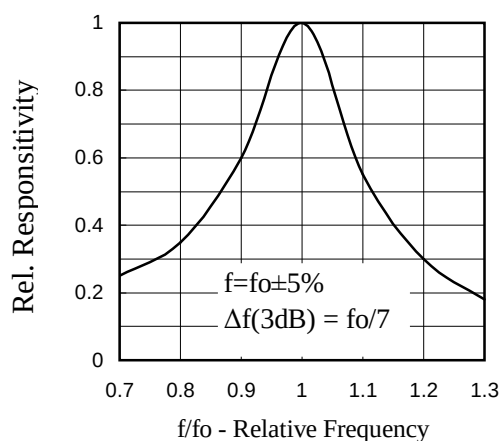

FREQUENCY DEPENDENCE OF RESPONSIVITY

## Reliability

| Test item               | Test condition                                                                                      | Standard |
|-------------------------|-----------------------------------------------------------------------------------------------------|----------|
| High temperature        | Ta=+80°C t=240H                                                                                     | Note 2.  |
| High temp. & high humi. | Ta=+40°C 90%RH t=240H                                                                               | Note 2.  |
| Low temperature         | Ta= -25°C t=240H                                                                                    | Note 2.  |
| Heat cycle              | -25°C(0.5H) ~ +80°C(0.5H) 20cycle                                                                   | Note 2.  |
| Dropping                | Test devices shall be dropped 3 times naturally onto hard wooden board from a 75cm height position. | Note 3.  |

NOTE 1. Distance between emitter & detector specifies maximum distance that output wave form satisfies the standard under the conditions below against the standard transmitter.

- (1)Measuring place .....Indoor without extreme reflection of light.
- (2)Ambient light source... Detecting surface illumination shall be 200±50Lux under ordinary hite fluorescense lamp of no high frequency lighting.
- (3)Standard transmitter ... Burst wave indicated in Fig 1. of standard transmitter shall be arranged to 50mVp-p under the measuring circuit specified in Fig 2.

NOTE 2. (electro-optical characteristics) shall be satisfied after leaving 2 hours in the normal temperature .

NOTE 3. (electro-optical characteristics) shall be satisfied and no conoid deforms and destructions of appearance .(excepting deforms of terminals)

## Inspection standard

- 1.Among electrical characteristics , total number shall be inspected on items blow.
  - 1-1 front distance between emitter & detector
  - 1-2 Current consumption
  - 1-3 H level output voltage
  - 1-4 L level output voltage
- 2.Items except above mentioned are not inspected particularly , but shall fully satisfy

## CAUTION ( When use and storage of this device )

- 1.Store and use where there is no force causing transformation or change in quality .
- 2.Store and use where there is no corrosive gas or sea(salt) breeze .
- 3.Store and use where there is no extreme humidity .
- 4.Solder the lead-pin within the condition of ratings. After soldering do not add extra force .
- 5.Do not wash this device . Wipe the stains of diode side with a soft cloth. You can use the solvent , ethylalcohol or methylalcohol or isupropylene only .
- 6.To prevent static electricity damage to the Pre-AMP make sure that the human body , the soldering iron is connected to ground before using .
- 7.Put decoupling device between Vcc and GND for reduce the noise from power supply line .
- 8.The performance of remote-control system depends on environments condition and ability of periferal parts. Customer should evaluate the performance as total system in those conditions after system up with components such as commander , micon and this receiver module .

## Others

- 1.This device is not design to endure radiative rays and heavily charged particles .
- 2.In case where any trouble or questions arise,both parties agress to make full discussion covering the said problem .