


## Clamps and Clips

### Flat Ribbon Cable Clamps

HellermannTyton's flat ribbon cable clamps secure and route flat cable.


#### Product Applications

- Personal Computers
- Servers
- MainFrames
- Large Volume Printers
- Copy Machines
- ATM Machines
- Household Appliances

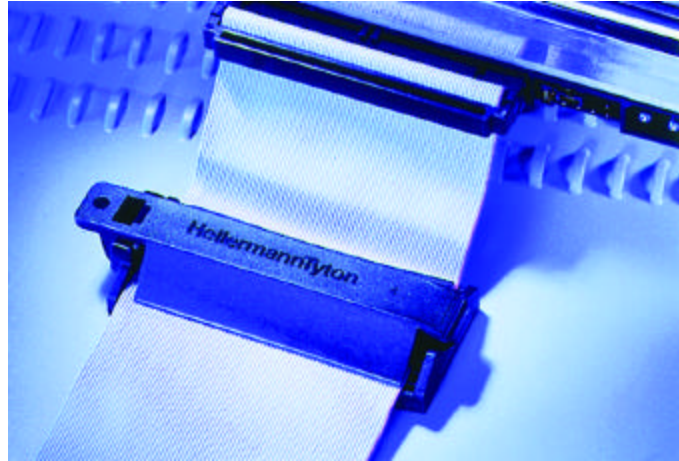

#### Product Features

- High impact nylon 6/6 performs well in very dry, air-conditioned areas.
- The rounded edges and soft wings protect and hold the cable securely.
- Clamps are offered in four sizes that are easy to fasten and unfasten.




Mount with screws or high quality acrylic tape.



Four sizes offered, sample pack available - use part number SPLFKH

#### Technical Specifications

Clamp Material:	Nylon6/6
Color:	Black
Operating Temperature:	-40°F to 176°F (-40°C to 80°C)
Density:	.03974 lbm/in <sup>3</sup> (1.10 g/cm <sup>3</sup> )
Flame Rating:	UL94 HB
Melting Point:	503°F (262°C)

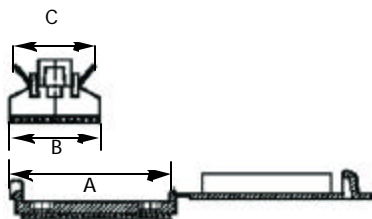


#### Product Selection

Hellermann Tyton Part No.	Approximate Dimensions inches (mm)			Pkg. Qty.
	A	B	C	
Adhesive				
15115250	1.22 (31)	.98 (25)	.86 (22)	100
15115300	1.37 (35)	.98 (25)	.86 (22)	100
15115500	2.22 (56.6)	.98 (25)	.86 (22)	100
15115800	3.38 (86)	.98 (25)	.86 (22)	100
Non Adhesive				
15116250	1.22 (31)	.98 (25)	.86 (22)	100
15116300	1.37 (35)	.98 (25)	.86 (22)	100
15116500	2.22 (56.6)	.98 (25)	.86 (22)	100
15116800	3.38 (86)	.98 (25)	.86 (22)	100

## Series 12 Adhesive Cable Clamps

HellermannTyton's Series 12 cable clamps feature an exclusive quick lock/release and an adhesive backing. Recommended operating temperatures are -40°F to 150°F (-40°C to 65°C) Standard color: gray — Standard material: nylon 6/6

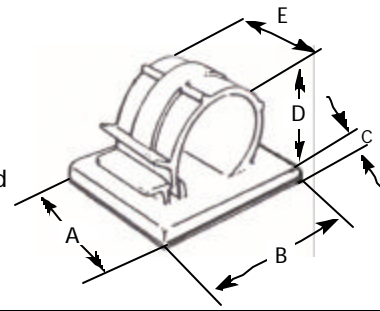


Hellermann Tyton Part No.	Approximate Dimensions in Inches (mm)					Maximum Bundle Diameter	Rated Static Load	Pkg. Qty.
	A	B	C	D	E			
12-0188M4	.735 (18.67)	.620 (15.75)	.080 (2.03)	.340 (8.64)	.390 (9.91)	.188 (4.78)	1/2 lb.	1000
12-0250M4	1.000 (25.4)	.855 (21.72)	.100 (2.54)	.415 (10.54)	.620 (15.75)	.250 (6.35)	3/4 lb.	1000
12-0375M4	1.000 (25.4)	.980 (24.89)	.090 (2.29)	.545 (13.84)	.625 (15.88)	.375 (9.53)	1 lb.	1000
12-0500M4	.990 (25.15)	1.215 (30.86)	.110 (2.79)	.671 (17.04)	.630 (16.00)	.500 (12.70)	1- 1/2 lb.	1000
12-0750H4	1.165 (29.59)	1.468 (37.29)	.125 (3.18)	.985 (25.02)	.750 (19.10)	.750 (19.10)	1- 3/4 lb.	500

Series 12 clamps replace HellermannTyton's RAC Clamps. If you need cross reference assistance, contact HellermannTyton.

## RB Clips

RB self-adhesive clips are ideal for cable and pipe bundles. Bundles are easily snapped into or out of clips. The RB clips suit diameters of 1/8", 5/16", and 1/2". Standard color: natural — Standard material: nylon 6/6



Hellermann Tyton Part No.	Dimensions In. (mm)			Pkg. Qty.
	A	B	C	
RB5H4	.75" (19.0)	.24" (6.0)	.75" (19.0)	500
RB8L4	1.00" (25.0)	.45" (11.5)	1.00" (25.0)	200
14L4	1.3" (33.4)	.63" (16.0)	1.08" (27.5)	200

Samples from HellermannTyton come in units of one clip each.

Actual clips from stock come in pairs connected together on adhesive liner.

## Series 52 Clamps

Series 52 clamps are extruded and feature an adhesive backing. Recommended operating temperatures are -40°F to 150°F (-40°C to 65°C). Standard color: natural Standard material: flame resistant PVC



HellermannTyton Part No.	Dimensions In. (mm)				Maximum Bundle Dia. In. (mm)		Rated Static Load	Pkg. Qty.
	A	B	C	D	E to	F		
52-0250C2	.500"	.500"	.208"	.450"	.125"	250"	1/8 lb.	100
52-0250M4	(12.70)	(12.70)	(5.28)	(11.43)	(3.18)	(6.35)		1000
52-0500C2	.750"	.750"	.400"	.750"	.250"	.500"	1/4 lb.	100
52-0500M4	(19.10)	(19.10)	(10.20)	(19.10)	(6.35)	(12.70)		1000
52-0750K2	1.000"	1.130"	.580"	1.050"	.500"	.750"	1/2 lb.	50
52-0750H4	(25.40)	(28.70)	(14.73)	(26.70)	(12.70)	(19.10)		500
52-1000H4	1.250"	1.500"	.750"	1.350"	.750"	1.000"	7/8 lb	500
	(31.80)	(38.10)	(19.10)	(34.30)	(19.10)	(25.40)		

Other clamps and clips are available from HellermannTyton, contact us for more information.

### HellermannTyton Corporate Headquarters North America

7930 N. Faulkner Rd, PO Box 245017  
Milwaukee, WI 53224  
Phone: (414) 355-1130, (800) 537-1512  
Fax: (414) 355-7341, (800) 848-9866  
<http://www.hellermann.tyton.com>  
email: [corp@htamericas.com](mailto:corp@htamericas.com)

A QS-9000 and ISO 14001 Registered Company

LITPD193 Rev 1 — November 2002

### HellermannTyton Canada

Beaver Creek Business Park  
Unit #1, 160 West Beaver Creek  
Richmond Hill, Ontario L4B 1B4 Canada  
Phone: (905) 882-8024, (800) 661-2461  
Fax: (905) 882-1624, (800) 390-3904  
email: [sales@hellermanntyton.ca](mailto:sales@hellermanntyton.ca)

### HellermannTyton Mexico

Rio Conchos 1757  
Colonia Industrial El Rosario  
Guadalajara, Jalisco, Mexico 44890  
Phone: (3) 659-7020  
011-52-3-659-7020 (From U.S.)  
Fax: (3) 659-6939  
email: [info@hellermanntyton.com.mx](mailto:info@hellermanntyton.com.mx)