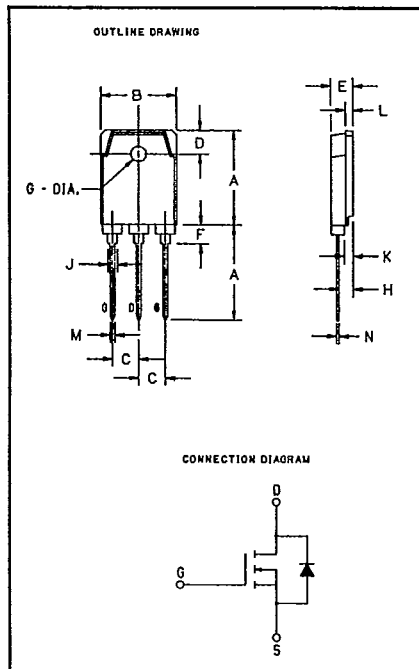


POWEREX**JS014501**
JS015001 Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

98 DE 7294621 0002751 0

Single EXMOS™
MOSFET
10 Amperes/450-500 Volts450-500 Volts JS014501, JS015001
Outline Drawing

Dimension	Inches	Millimeters
A	.787	20
B	.614	15.6
C	.214 ± .008	5.45 ± 0.2
D	.197	5
E	.177	4.5
F	.157	4
G	.126 ± .008 Dia.	3.2 ± 0.2 Dia.
H	.110	2.8
J	.079	2
K	.071	1.8
L	.059	1.5
M	.039	1
N	.024	0.6

Description

Powerex Single EXMOS™ MOSFET Transistors are designed for use in applications requiring Hi-Frequency switching and low loss control.

Features:

- TO-3P Package
- Vertical DMOS Construction
- Low Drive Requirement
- No Second Breakdown

Applications:

- AC Motor Control
- UPS Inverters
- Switch Mode Power Supply
- PWM Regulator

Ordering Information

Select the complete eight digit module part number you desire from the table. i.e. JS015001 is a 500 Volt, 10 Ampere Single EXMOS™ MOSFET.

Type	V _{DSS} Volts (×10)	Current Rating Amperes (×10)
JS01	45 50	01



Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JS014501
JS015001
Single EXMOS™ MOSFET
10 Amperes/450-500 Volts

Maximum Ratings $T_c = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	JS014501/JS015001	Units
Junction Temperature	T_J	-55 to 150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 to 150	$^\circ\text{C}$
Drain Source Voltage	V_{DSS}	450/500	Volts
Gate-Source Voltage	V_{GSS}	± 30	Volts
Continuous Drain Current	I_D	8	Amperes
Continuous Source Current	I_S	8	Amperes
Pulsed Drain Current Repetitive $T_J = 150^\circ\text{C}$	I_{DM}	30	Amperes
Power Dissipation	P_T	120	Watts
Max. Mounting Torque, Mounting Screw (M3)	—	7	in-lb.

Static Electrical Characteristics $T_c, T_J = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	JS014501			JS015001			Units
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = V_{DSS}, V_{GS} = 0V$	—	—	1	—	—	1	mA
Gate Source Leakage Current	$\pm I_{GSS}$	$V_{GS} = \pm 30V, V_{DS} = 0V$	—	—	0.1	—	—	0.1	μA
Gate Source Threshold Voltage	$V_{GS(th)}$	$I_D = 1 \text{ mA}, V_{DS} = 10V$	2	3	4	2	3	4	Volts
Drain Source On State Resistance	$R_{DS(on)}$	$V_{GS} = 6V, I_D = 5A$	—	0.6	0.78	—	0.7	0.9	Ω
Drain Source On State Voltage	$V_{DS(on)}$	$V_{GS} = 6V, I_D = 5A$	—	3.0	3.9	—	3.5	4.5	Volts
Thermal Resistance, Junction to Case	$R_{\theta JC}$	—	—	—	1.0	—	—	1.0	$^\circ\text{C/W}$

Source Drain Diode Characteristics $T_c, T_J = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	JS014501/JS015001			Units
			Min.	Typ.	Max.	
Source-Drain Voltage	V_{SD}	$I_S = 5A, V_{GS} = 0V$	—	1.0	—	Volts
Reverse Recovery Time	t_{rr}	$I_S = 10A, di_S/dt = -20A/\mu\text{s}, V_{GS} = 0V$	—	900	—	ns

Dynamic Electrical Characteristics $T_c, T_J = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	JS014501/JS015001			Units
			Min.	Typ.	Max.	
Forward Transconductance	g_{fs}	$I_D = 5A, V_{DS} = 10V$	2	4	—	mhos
Input Capacitance	C_{iss}	—	—	1300	—	pF
Output Capacitance	C_{oss}	$V_{GS} = 0V, V_{DS} = 25V, f = 1\text{MHz}$	—	230	—	pF
Reverse Transfer Capacitance	C_{rss}	—	—	80	—	pF
Turn On Time (Note 1)	t_{on}	$V_{DD} = 200V, I_D = 5A, V_{GS} = 10V$	—	100	200	ns
Turn Off Time (Note 1)	t_{off}	$R_{GEN} = R_{GS} = 50\Omega$	—	160	300	ns

Note 1: Turn on Time (t_{on}) = Turn on Delay ($t_{d(on)}$) + Rise Time (t_r)
Turn-off Time (t_{off}) = Turn Off Delay ($t_{d(off)}$) + Fall Time (t_f)




Tentative


Powerex, Inc., Hills Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JS014501
 JS015001
 Single EXMOS™ MOSFET
 10 Amperes/450-500 Volts


TRANSFER CHARACTERISTICS (TYPICAL) JS014501

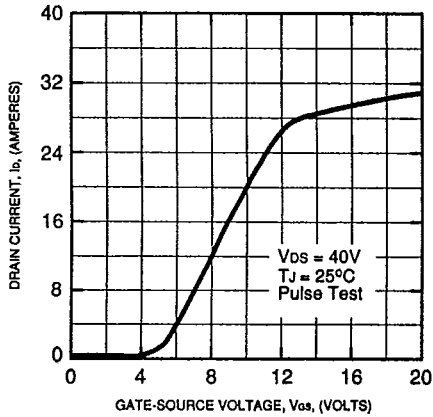


NORMALIZED DRAIN-SOURCE ON-STATE VOLTAGE (TYPICAL) JS014501

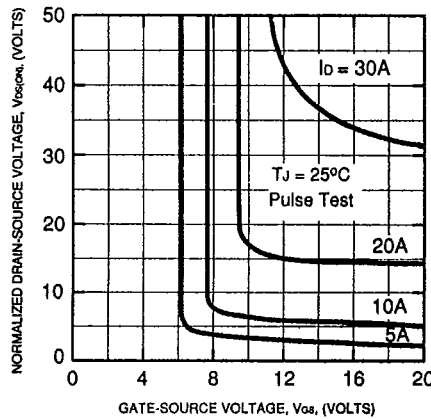


COMMON SOURCE OUTPUT CHARACTERISTICS (TYPICAL) JS014501

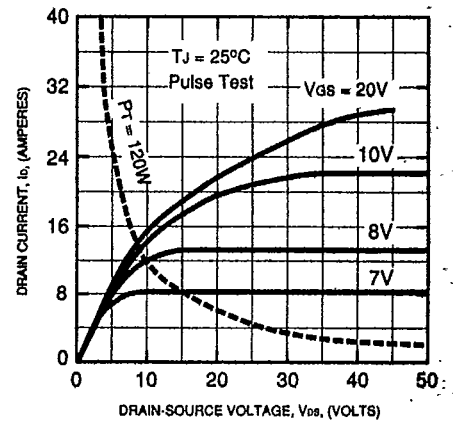


COMMON SOURCE OUTPUT CHARACTERISTICS (TYPICAL) JS014501

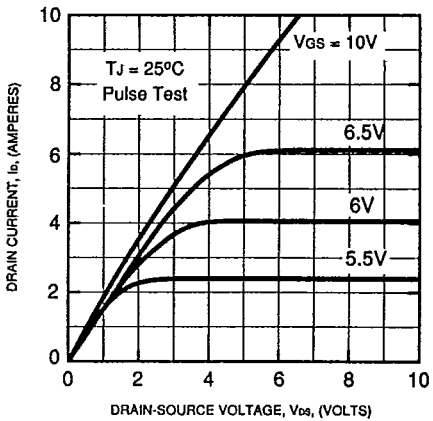


CAPACITANCE VS. DRAIN-SOURCE VOLTAGE (TYPICAL) JS014501

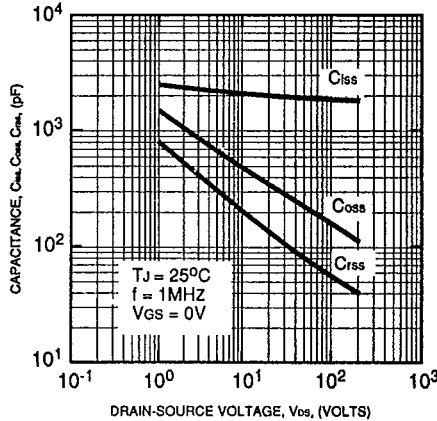


SWITCHING CHARACTERISTICS (TYPICAL) JS014501

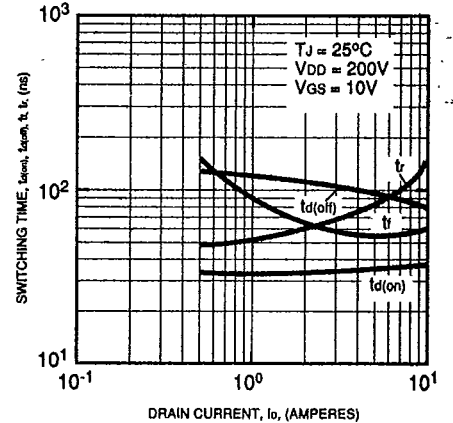


SOURCE-DRAIN DIODE FORWARD CHARACTERISTICS (TYPICAL) JS014501

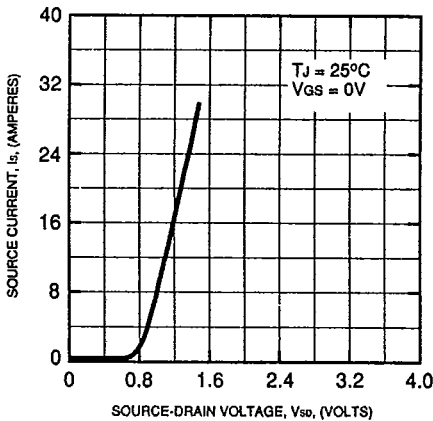

FORWARD BIAS SAFE OPERATING AREA (S.O.A.) JS014501

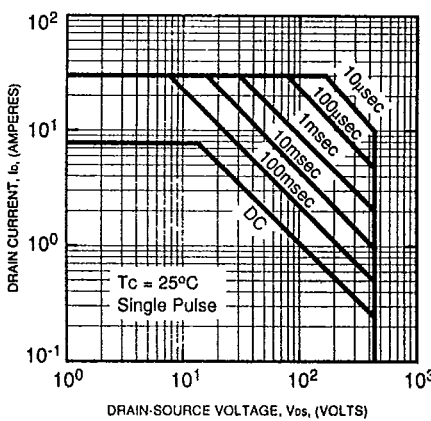

TEMPERATURE DERATING FACTOR OF SAFE OPERATING AREA (S.O.A.) JS014501

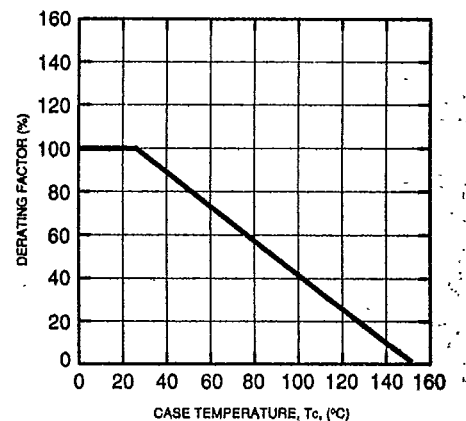





Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JS014501
 JS015001
 Single EXMOS™ MOSFET
 10 Amperes/450-500 Volts



GATE CHARGE VS. V_{GS}
 (TYPICAL)
 JS014501

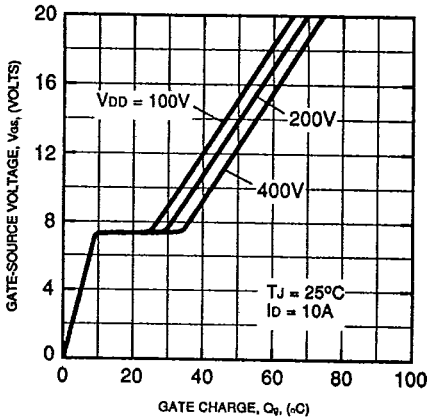

FORWARD TRANSFER ADMITTANCE VS.
 DRAIN CURRENT (TYPICAL)
 JS014501

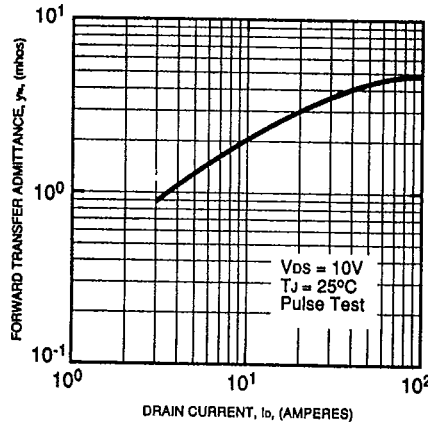

Switching Time Test Circuit

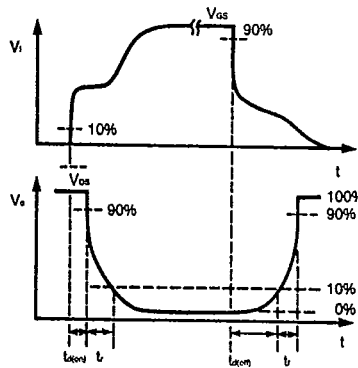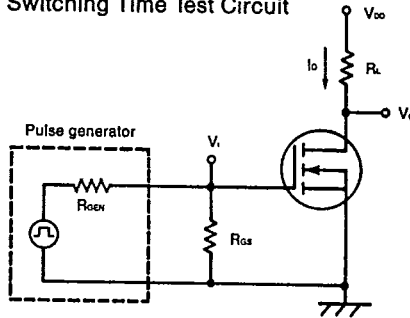


Notice: MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling should be observed.




Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JS014501
JS015001
Single EXMOS™ MOSFET
10 Amperes/450-500 Volts


TRANSFER CHARACTERISTICS
(TYPICAL)
JS015001

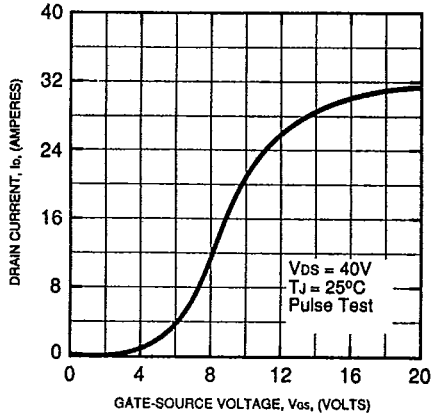


NORMALIZED DRAIN-SOURCE
ON-STATE VOLTAGE (TYPICAL)
JS015001

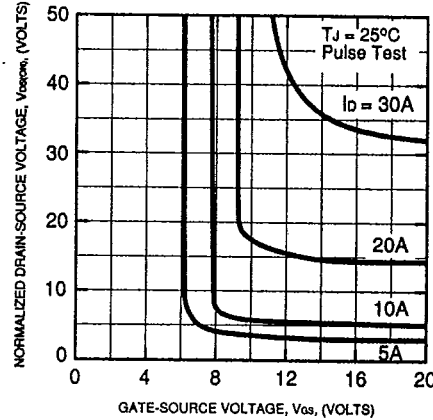


COMMON SOURCE OUTPUT
CHARACTERISTICS (TYPICAL)
JS015001

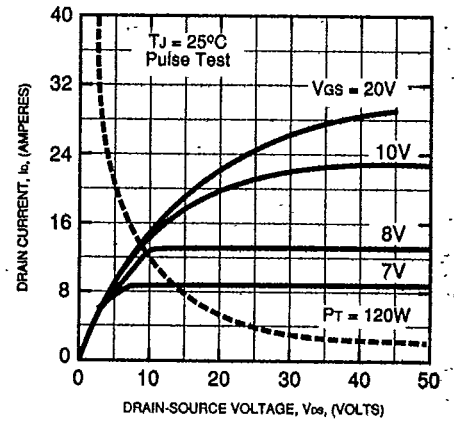


COMMON SOURCE OUTPUT
CHARACTERISTICS (TYPICAL)
JS015001

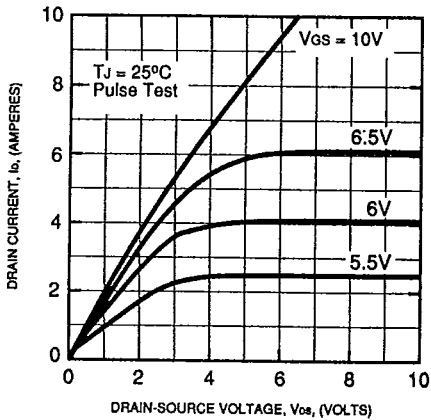


CAPACITANCE VS. DRAIN-SOURCE VOLTAGE
(TYPICAL)
JS015001

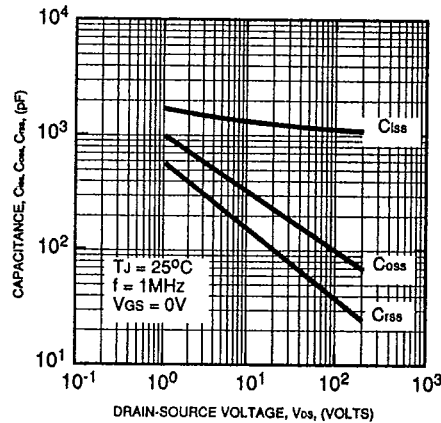


SWITCHING CHARACTERISTICS
(TYPICAL)
JS015001

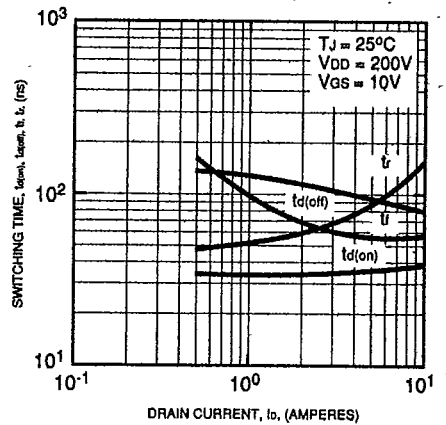


SOURCE-DRAIN DIODE
FORWARD CHARACTERISTICS (TYPICAL)
JS015001

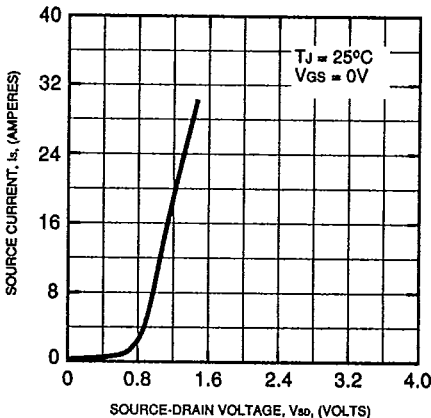

FORWARD BIAS SAFE OPERATING AREA
(S.O.A.)
JS015001

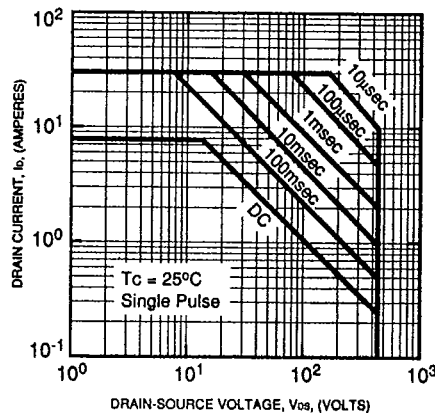

TEMPERATURE DERATING FACTOR
OF SAFE OPERATING AREA (S.O.A.)
JS015001

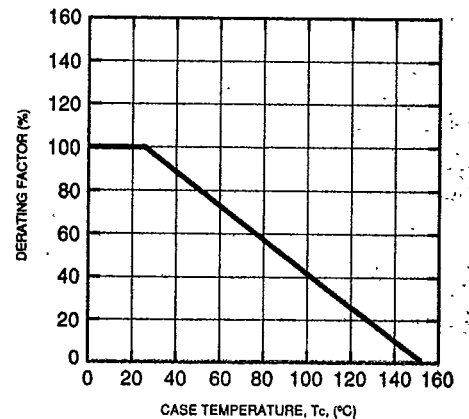





Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JS014501
JS015001
Single EXMOSTM MOSFET
10 Amperes/450-500 Volts



GATE CHARGE VS. V_{GS}
(TYPICAL)
JS015001

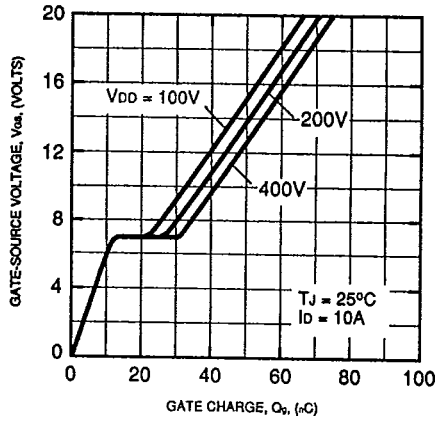

FORWARD TRANSFER ADMITTANCE VS.
DRAIN CURRENT (TYPICAL)
JS015001

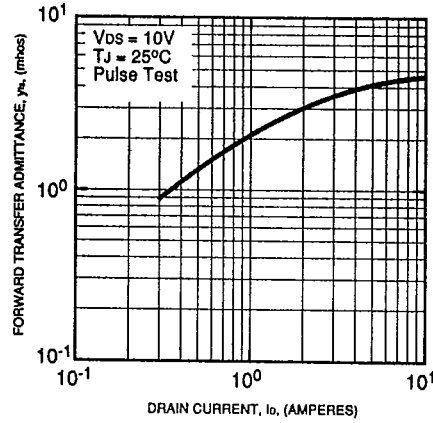

Switching Time Test Circuit

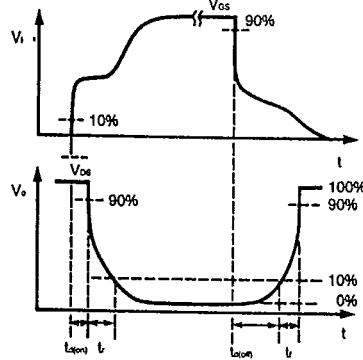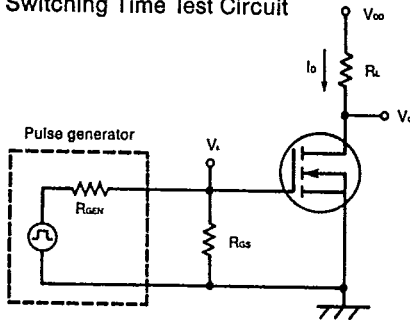

Notice: MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling should be observed.