
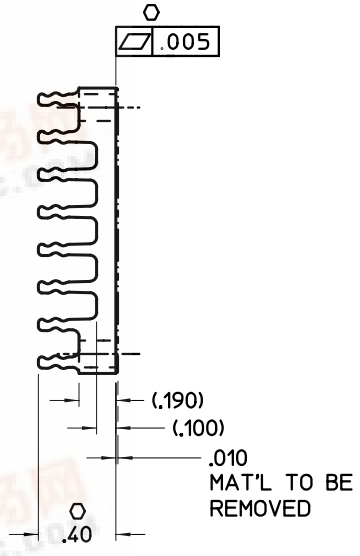


VICOR CONFIDENTIAL  
 THIS DOCUMENT AND THE DATA DISCLOSED  
 HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,  
 USED, OR DISCLOSED IN WHOLE OR IN PART  
 TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
#1	RELEASED FOR DEVELOPMENT	DPK 11/17/97	SWN
#2	ADDED +.010 TOL TO DIM	DPK 12/8/97	SWN
#3	.49 WAS .490: REMOVED P/N STAMPING	DPK 8/24/98	SWN
#4	2.28 WAS 2.280	DPK 9/2/98	SWN
#5	ADDED .40 AND "O" TO .100 & .190	DPK 9/11/98	SWN
#6	ADDED NOTE 4, CRITICAL CHA. "O"	AK 10/6/99	SWN

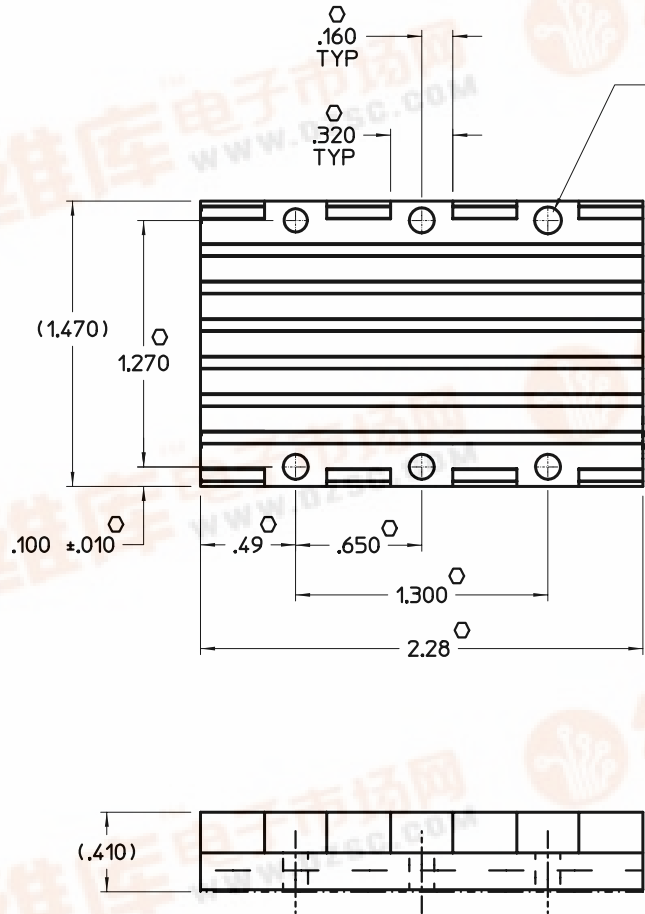

- NOTES
1. MAKE FROM VICOR EXTRUSION 16287.
  2. REMOVE ALL BURRS AND SHARP EDGES.
  3. FINISH: CLEAR CHROMATE.
  4. "O" DENOTES CRITICAL CHARACTERISTICS FOR LOT INSPECTION.

DRAWN BY	DATE
D.P. KELLY	11/07
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES - TOLERANCES ARE	
FRACTIONS DECIMALS ANGLES	
1/64 .001 .01°	100% .01°

**VICOR**

HTSNK, "C" LONG. .4H  
 LOW FLOW THRU HOLE

