

# DATA SHEET

## **FT 18**

### Frame Transfer CCD Image Sensor


Product specification  
File under Image Sensors

2000 January 7

# Frame Transfer CCD Image Sensor

**FT 18**

- 2/3-inch optical format
- 1M active pixels (1024H x 1024V)
- Progressive scan
- Excellent anti-blooming
- Variable electronic shuttering
- Square pixel structure
- Hor. and Vert. binning
- 100% optical fill factor
- High dynamic range (>60dB)
- High sensitivity
- Low dark current and fixed pattern noise
- Low read-out noise
- Data rate up to 40 MHz
- Frame rate up to 30 Hz
- Mirrored read-out option

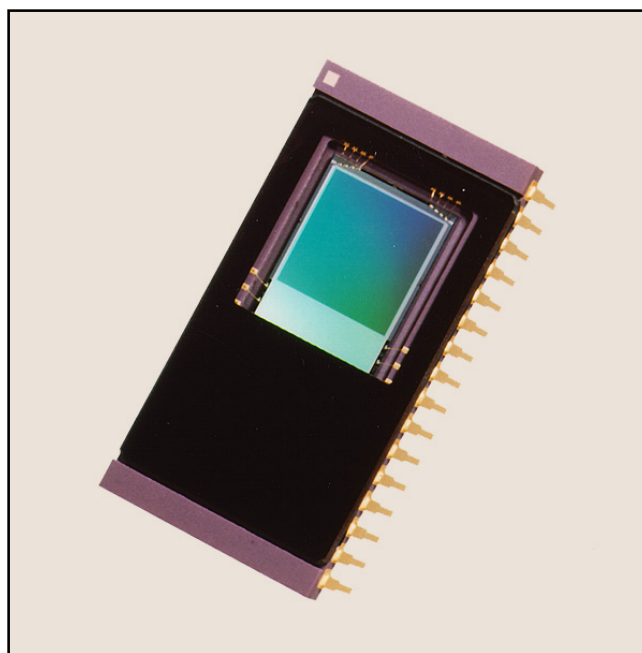

## Description

The FT 18 is a monochrome progressive-scan frame-transfer image sensor offering 1K x 1K pixels at 30 frames per second through a single output buffer. The combination of high speed and a high linear dynamic range (>10 true bits at room temperature without cooling) makes this device the perfect solution for high-end real time medical X-ray, scientific and industrial applications. A second output can be used for mirrored images. The device structure is shown in figure 1.

## Device structure

|                       |                           |           |
|-----------------------|---------------------------|-----------|
| Optical size:         | 7.68 mm (H) x 7.68 mm (V) |           |
| Chip size:            | 8.9 mm (H) x 17.0 mm (V)  |           |
| Pixel size:           | 7.5 $\mu$ m x 7.5 $\mu$ m |           |
| Active pixels:        | 1024 (H) x 1024 (V)       |           |
| Total no. of pixels:  | 1072 (H) x 1048 (V)       |           |
| Optical black pixels: | Left: 20                  | Right: 20 |
| Timing pixels:        | Left: 4                   | Right: 4  |
| Dummy register cells: | Left: 7                   | Right: 7  |
| Contour lines:        | Bottom: 1                 | Top: 4    |
| Optical black lines:  | Bottom: 11                | Top: 8    |

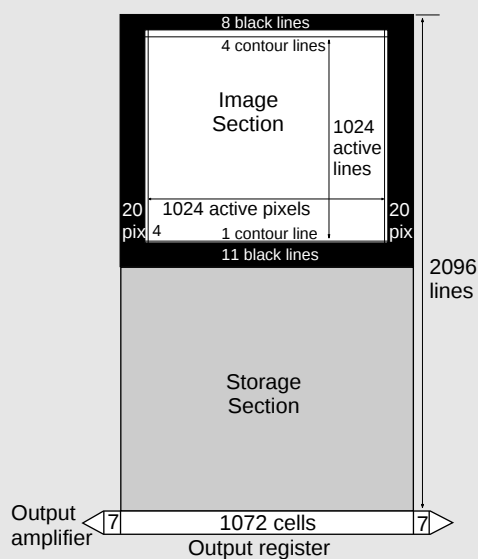


Figure 1 - Device structure

# Frame Transfer CCD Image Sensor

# FT 18

## Architecture of the FT 18

The FT18 consists of a shielded storage section and an open image section. Both sections have the same structure with identical cells and properties. The only difference between the two sections is the optical light shield.

The optical centres of all pixels in the image section form a square grid. The charge is generated and integrated in this section. The image section is controlled by four image clocks (A1 to A4). After integration, the image charge is completely shifted to the storage section. The integration time is electronically controlled by charge reset (CR).

The storage section is controlled by four storage clocks (B1 to B4). An output register is located below the storage section for read-out. The output register has buffers at both ends. This allows either normal or mirrored read-out.

Transport of the pixels in the output register is controlled by three register clock phases (C1 to C3). The register can be used for vertical binning. Horizontal binning can be achieved by summing pixel charges under the floating diffusion. More information can be found in the application note. Figure 2 shows the detailed internal structure.


| IMAGE SECTION                               |                               |
|---------------------------------------------|-------------------------------|
| Image diagonal                              | 10.9 mm                       |
| Aspect ratio                                | 1:1                           |
| Active image width x height                 | 7.680 x 7.680 mm <sup>2</sup> |
| Total width x height                        | 8.040 x 7.860 mm <sup>2</sup> |
| Pixel width x height                        | 7.5 x 7.5 µm <sup>2</sup>     |
| Geometric fill factor                       | 100%                          |
| Image clock pins                            | A1, A2, A3, A4                |
| Capacity of each clock phase                | <3.75nF per pin               |
| Number of active lines                      | 1024                          |
| Number of contour lines                     | 4 (top) + 1 (bottom)          |
| Number of black lines                       | 8 (top) + 11 (bottom)         |
| Total number of lines                       | 1048                          |
| Number of active pixels per line            | 1024                          |
| Number of overscan (timing) pixels per line | 8 (2x4)                       |
| Number of black reference pixels per line   | 40 (2x20)                     |
| Total number of pixels per line             | 1072                          |

| STORAGE SECTION                            |                               |
|--------------------------------------------|-------------------------------|
| Storage width x height                     | 8.040 x 7.860 mm <sup>2</sup> |
| Cell width x height                        | 7.5 x 7.5 µm <sup>2</sup>     |
| Storage clock phases                       | B1, B2, B3, B4                |
| Capacity of each B phase                   | <4.1nF per pin                |
| Number of cells per line x number of lines | 1072 x 1048                   |

| OUTPUT REGISTER                                 |                                 |
|-------------------------------------------------|---------------------------------|
| Output buffers (three-stage source follower)    | 2                               |
| Number of registers                             | 1 (bidirectional below storage) |
| Number of register cells below storage          | 1072                            |
| Number of extra cells to output                 | 2 x 7                           |
| Output register horizontal transport clock pins | 3 (C1..C3)                      |
| Capacity of each C-clock phase                  | <85pF per pin                   |
| Overlap capacity between neighbouring C-clocks  | <35pF                           |
| Reset Gate clock phases                         | 2 pins (RGL, RGR)               |
| Capacity of each RG                             | <15pF                           |

## Frame Transfer CCD Image Sensor

FT 18

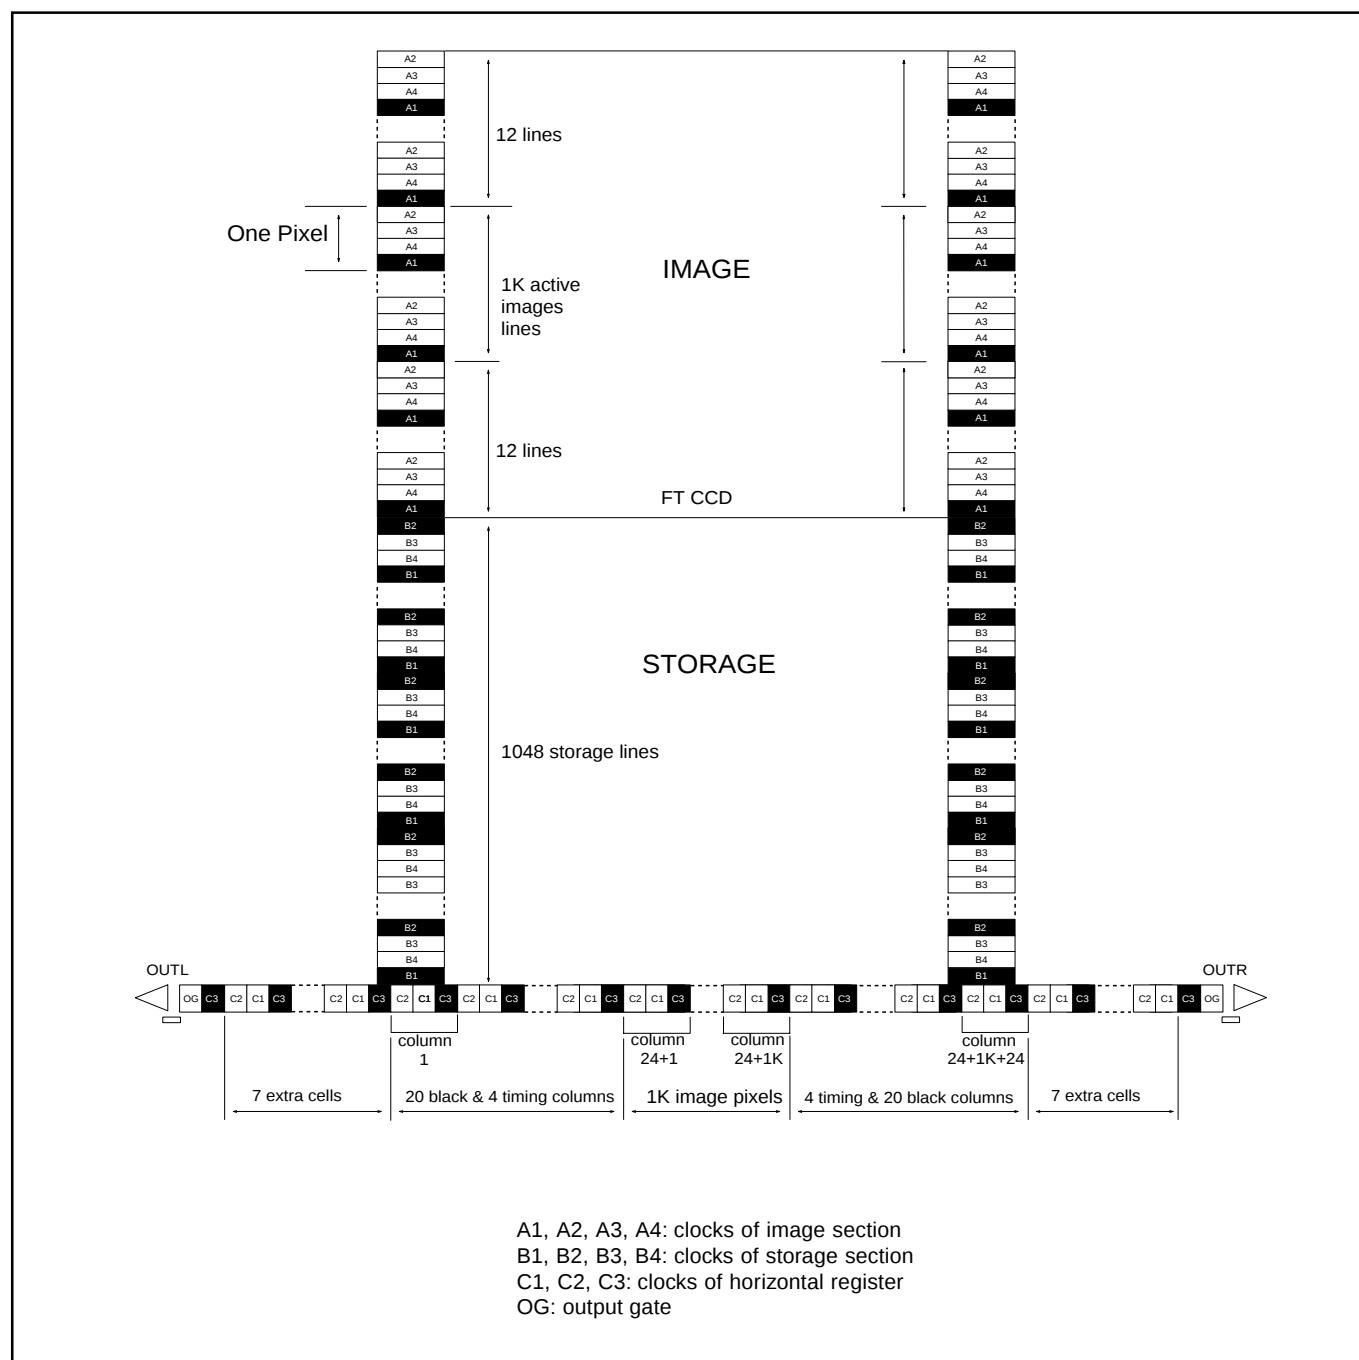

**Figure 2 - Detailed internal structure**

## Frame Transfer CCD Image Sensor

FT 18

## Specifications

| Absolute Maximum Ratings                      | Min. | Max. | Unit |
|-----------------------------------------------|------|------|------|
| GENERAL:                                      |      |      |      |
| storage temperature                           | -55  | +80  | °C   |
| ambient temperature during operation          | -40  | +60  | °C   |
| voltage between any two gates                 | -20  | +20  | V    |
| DC current through any clock (absolute value) | -0.2 | +0.2 | μA   |
| OUT current (no short circuit protections)    | 0    | 6    | mA   |
| VOLTAGES IN RELATION TO VNS:                  |      |      |      |
| VPS, SFS                                      | -30  | +0.5 | V    |
| SFD                                           | -8   | +8   | V    |
| RD                                            | -15  | +0.5 | V    |
| All other pins                                | -32  | +0.5 | V    |
| VOLTAGES IN RELATION TO VPS:                  |      |      |      |
| VNS                                           | -0.5 | +30  | V    |
| SFD, RD                                       | +0   | +30  | V    |
| SFS                                           | -8   | +8   | V    |
| All other pins                                | -20  | +20  | V    |

| DC Conditions <sup>1</sup> |                        | Min. | Typical  | Max. | Unit |
|----------------------------|------------------------|------|----------|------|------|
| VNS <sup>2</sup>           | N substrate            | 16   | adjusted | 24   | V    |
| VPS                        | P substrate            | 2    | 4        | 6    | V    |
| SFD                        | Source Follower Drain  | 18   | 20       | 22   | V    |
| SFS                        | Source Follower Source | -    | 0        | -    | V    |
| VCS                        | Current Source         | -2   | 0        | 3    | V    |
| OG                         | Output Gate            | 3    | 5.4      | 8    | V    |
| RD                         | Reset Drain            | 12   | 13       | 15   | V    |

| AC Clock Level Conditions <sup>1</sup>           | Min. | Typical | Max. | Unit |
|--------------------------------------------------|------|---------|------|------|
| IMAGE CLOCKS:                                    |      |         |      |      |
| A-clock swing                                    | 9.5  | 10      | -    | V    |
| A-clock low level                                | -    | 0       | -    | V    |
| Charge Reset (CR) level on A-clocks <sup>3</sup> | -    | -5      | -    | V    |
| Charge Pump (CP) level on A- clocks              | -    | 0       | -    | V    |
| STORAGE CLOCKS (duty cycle=5/8):                 |      |         |      |      |
| B-clock swing                                    | 9.5  | 10      | -    | V    |
| B-clock low level                                | -    | 0       | -    | V    |
| OUTPUT REGISTER CLOCKS (duty cycle=1/2):         |      |         |      |      |
| C-clock swing                                    | -    | 5       | -    | V    |
| C-clock low level                                | -    | 3       | -    | V    |
| OTHER CLOCKS:                                    |      |         |      |      |
| Reset Gate (RG) swing                            | -    | 10      | 12   | V    |
| Reset Gate (RG) low level                        | -    | 1       | -    | V    |

<sup>1</sup> All voltages in relation to SFS.<sup>2</sup> To set the VNS voltage for optimal Vertical Anti-Blooming (VAB), it should be adjustable between minimum and maximum values.<sup>3</sup> Guaranteed charge reset requires the CR voltage to last at least 1.2μs.

Frame Transfer CCD Image Sensor

FT 18

Timing diagrams (for default operation)

| AC Characteristics          | Min. | Typical | Max. | Unit |
|-----------------------------|------|---------|------|------|
| Horizontal frequency (1/Tp) | -    | 36      | 40   | MHz  |
| Vertical frequency          | -    | 750     | 833  | kHz  |


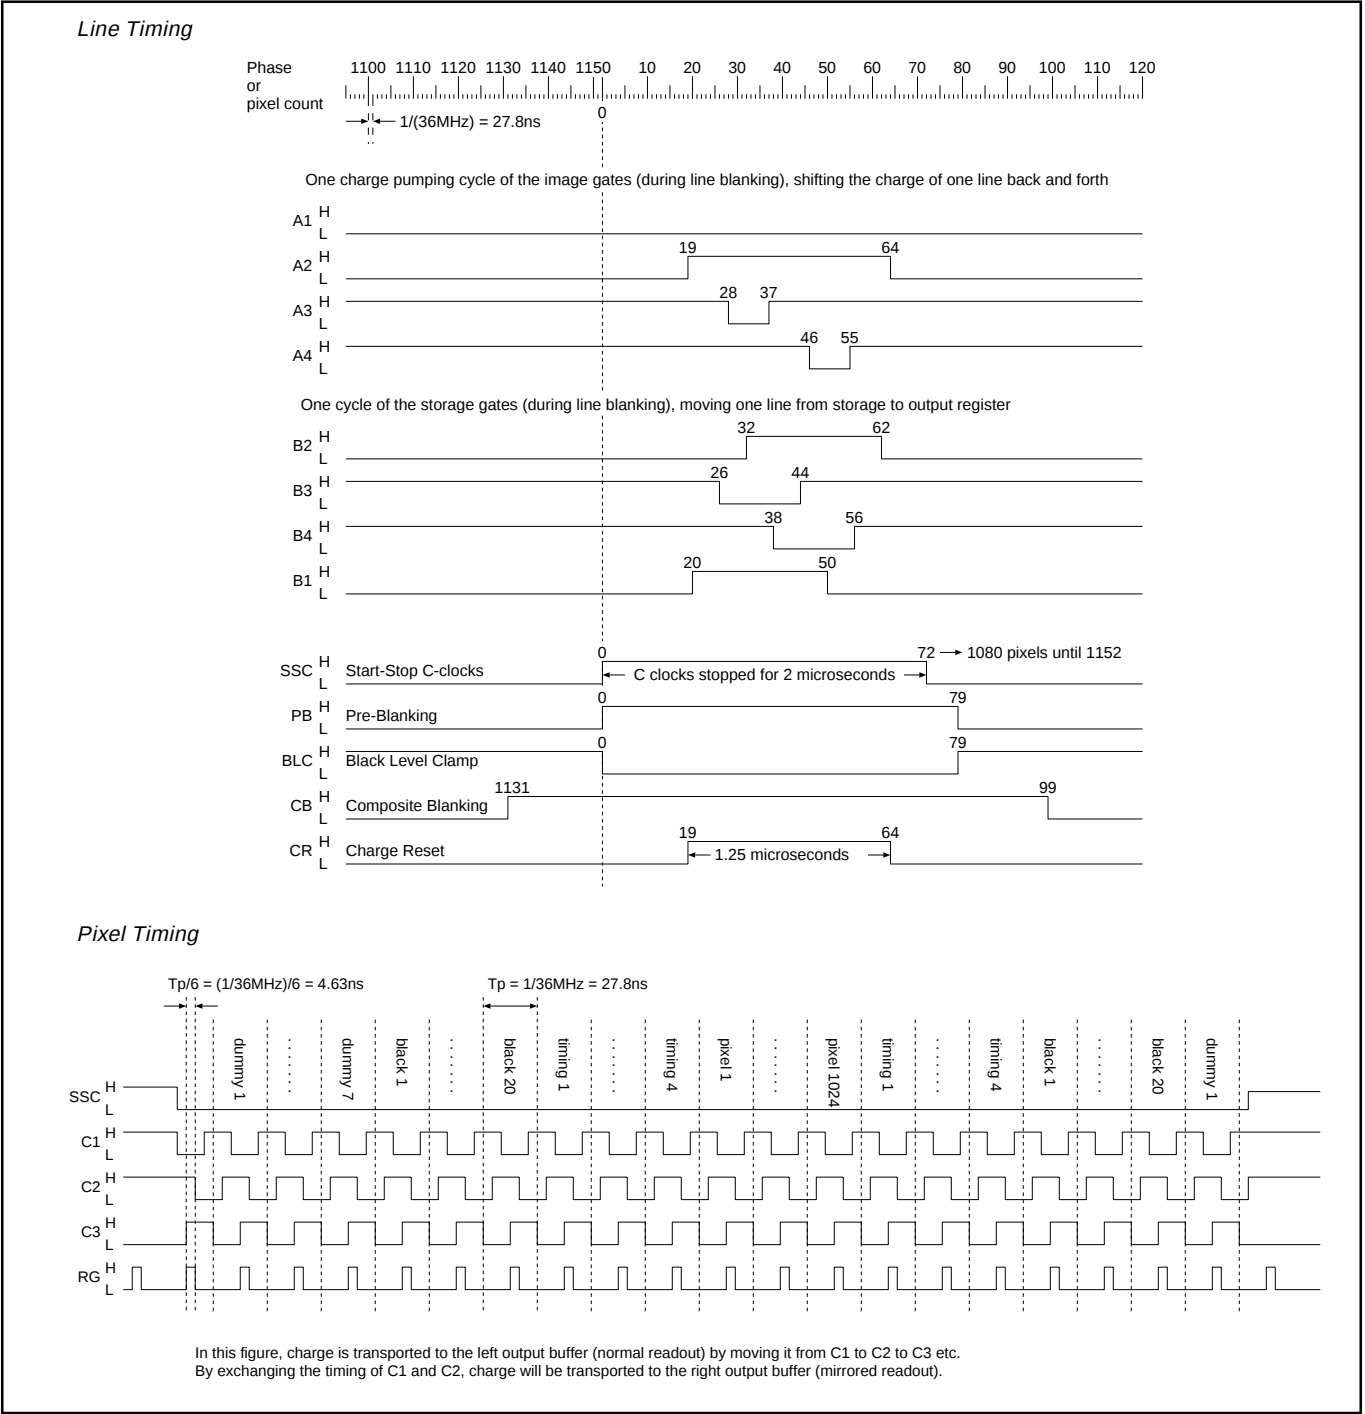


Figure 3 - Line and pixel timing diagrams

## Frame Transfer CCD Image Sensor

FT 18

## Frame Timing

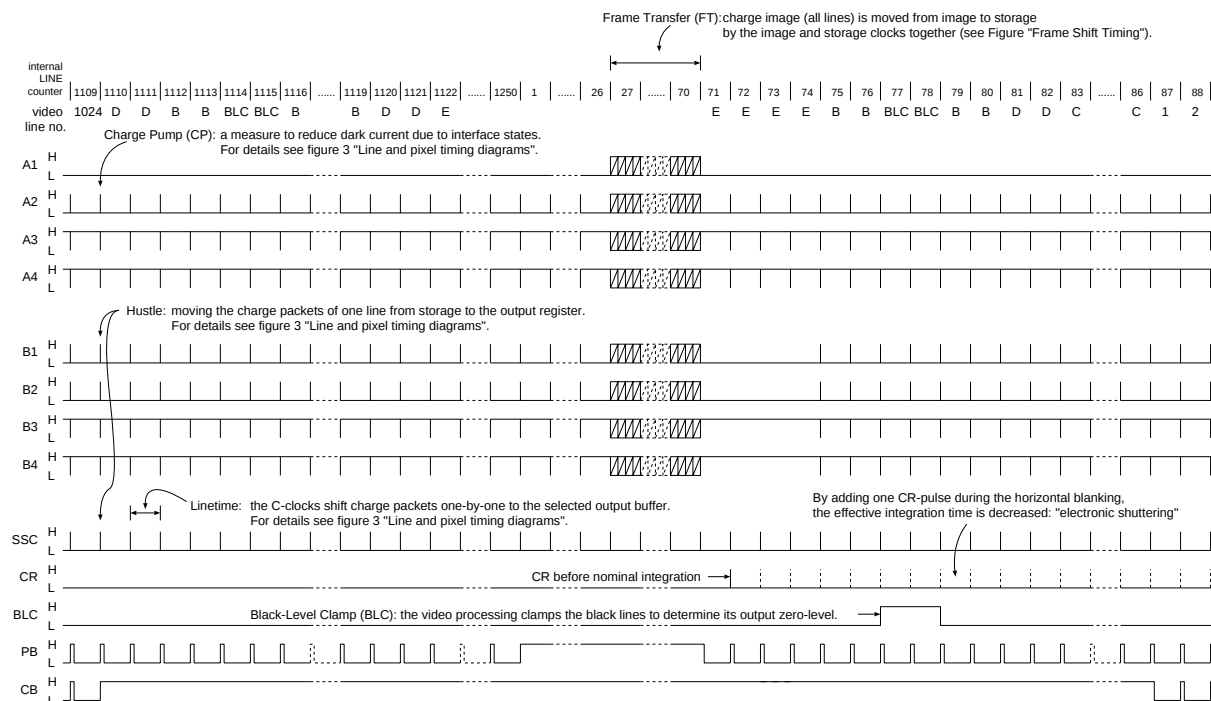

## Frame Shift Timing

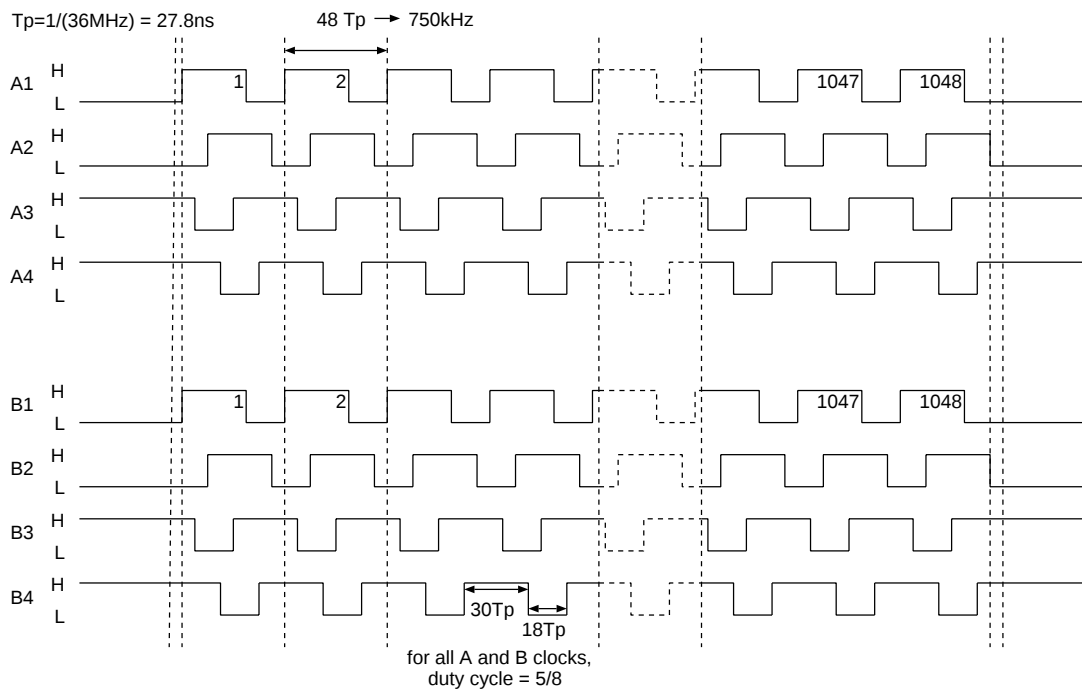


Figure 4 - Frame timing diagrams

# Frame Transfer CCD Image Sensor

# FT 18

## Performance

The performance of the FT 18 is described for modes of operation with 25 frames/sec or 30 frames/sec respectively. Measurements for the FT 18 are done under the following circumstances (values in brackets apply for the 30 frames/sec mode):

- VNS is adjusted as low as possible while maintaining proper Vertical Anti-Blooming.
- Integration takes place under 2 gates with 10V clock swing during 40ms (33.33ms)

- The vertical transport or frame shift frequency equals 750kHz (714kHz).
- The horizontal transport or read-out frequency equals 36MHz (40MHz).
- The RMS read-out noise of the output buffers and the FPN are measured in the bandwidth 0.1-18MHz (0.1-20MHz).
- The performance in dark is given at a temperature of 318K / 45°C. Note that the dark current decreases by a factor of two for every decrease of temperature of approximately 10°C.

| Linear / Saturation                                                            | Min. | Typical | Max. | Unit    |
|--------------------------------------------------------------------------------|------|---------|------|---------|
| Overexposure over entire area while maintaining good VAB                       | 300  | -       | -    | lux     |
| Vertical resolution (MTF) @ 67 lp/mm                                           | 25   | -       | -    | %       |
| Quantum efficiency @ 450 nm                                                    | 10   | 11      | -    | %       |
| Quantum efficiency @ 520 nm                                                    | 21   | 22      | -    | %       |
| Quantum efficiency @ 600 nm                                                    | 18   | 19      | -    | %       |
| Quantum efficiency @ 800 nm (near IR)                                          | 5    | -       | -    | %       |
| Image lag                                                                      | -    | 0       | -    | %       |
| White Shading <sup>1</sup>                                                     | -    | -       | 2.5  | %       |
| Random Non-Uniformity (RNU) <sup>2</sup>                                       | -    | 1.0     | 1.4  | %       |
| Full-well capacity Floating Diffusion (FD)                                     | 120  | -       | -    | kel.    |
| Full-well capacity saturation level ( $Q_{max}$ ) <sup>3</sup> image           | 40   | 45      | -    | kel.    |
| Full-well capacity saturation level ( $Q_{max}$ ) storage                      | 45   | -       | -    | kel.    |
| Full-well capacity saturation level ( $Q_{max}$ ) output register <sup>4</sup> | 90   | -       | -    | kel.    |
| <b>25 frames/sec mode only</b>                                                 |      |         |      |         |
| Sensitivity @ 3200K without IR cut-off filter                                  | 5.6  | 5.8     | -    | kel/lux |
| Smear without shutter <sup>5</sup>                                             | -    | -       | 0.39 | %       |
| Dynamic range                                                                  | 60   | 63.8    | -    | dB      |
| RMS read-out noise                                                             | -    | 29      | 38   | el      |
| <b>30 frames/sec mode only</b>                                                 |      |         |      |         |
| Sensitivity @ 3200K without IR cut-off filter                                  | 4.6  | 4.8     | -    | kel/lux |
| Smear without shutter <sup>5</sup>                                             | -    | -       | 0.40 | %       |
| Dynamic range                                                                  | 60   | 63.5    | -    | dB      |
| RMS read-out noise                                                             | -    | 30      | 40   | el      |

<sup>1</sup> White Shading is defined as the ratio of the one- $\sigma$  value of an 8x8 pixel blurred image (low-pass) to the mean signal value.

<sup>2</sup> Random Non Uniformity is defined as the ratio of the one- $\sigma$  value of the highpass image to the mean signal value at nominal light.


<sup>3</sup>  $Q_{max}$  is determined from the lowpass filtered image.

<sup>4</sup>  $Q_{max}$  of the output register may be increased up to 200kel. In this case the charge packets of the pixels may get mixed in the output register during horizontal transport. This may reduce the number of times that the output register needs to be read out if lines are read out solely to be dumped.

<sup>5</sup> The smear condition is: overexposure with a spot with a height of 10% of the image height (approx. 100 lines).

## Frame Transfer CCD Image Sensor

FT 18

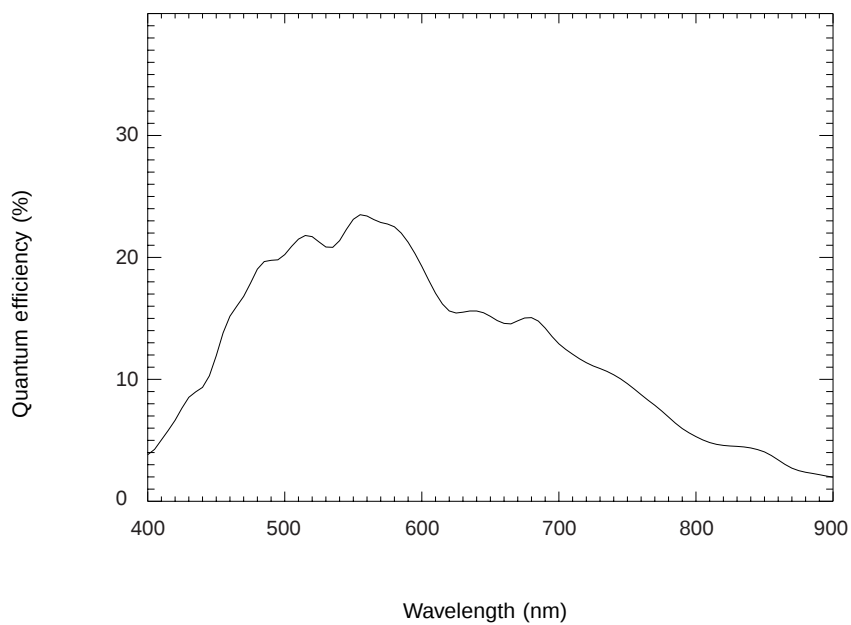**Figure 5 - Quantum efficiency versus wavelength**

## Frame Transfer CCD Image Sensor

## FT 18

| Output Buffers                                                                                     | Min. | Typical | Max. | Unit              |
|----------------------------------------------------------------------------------------------------|------|---------|------|-------------------|
| Conversion factor                                                                                  | 8.5  | 10      | 11.5 | $\mu\text{V/el.}$ |
| Supply current                                                                                     |      | 4       |      | mA                |
| Bandwidth                                                                                          |      | 110     |      | MHz               |
| Output impedance buffer ( $R_{\text{load}} = 3.3\text{k}\Omega$ , $C_{\text{load}} = 2\text{pF}$ ) |      | 400     |      | $\Omega$          |

| Dark Condition                                 | Min. | Typical | Max. | Unit             |
|------------------------------------------------|------|---------|------|------------------|
| Dark current                                   | -    | -       | 240  | $\text{pA/cm}^2$ |
| Black level offset <sup>1</sup>                | -    | -       | 25   | el               |
| <b>Dark condition at 25 frames/sec:</b>        |      |         |      |                  |
| Average dark signal                            | -    | 56      | 67   | el               |
| Shot noise of the dark current                 | -    | -       | 10   | el               |
| Horizontal shading                             | -    | -       | 25   | el               |
| Vertical shading                               | -    | -       | 66   | el               |
| Fixed Pattern Noise <sup>2</sup> in dark (FPN) | -    | -       | 19   | el               |
| <b>Dark condition at 30 frames/sec:</b>        |      |         |      |                  |
| Average dark signal                            | -    | 47      | 56   | el               |
| Shot noise of the dark current                 | -    | -       | 10   | el               |
| Horizontal shading                             | -    | -       | 25   | el               |
| Vertical shading                               | -    | -       | 56   | el               |
| Fixed Pattern Noise <sup>2</sup> in dark (FPN) | -    | -       | 19   | el               |

<sup>1</sup> Black level offset is defined as the difference in dark signal of a black reference line and an active image line.

<sup>2</sup> FPN is the one- $\sigma$  value of the highpass image.

# Frame Transfer CCD Image Sensor

# FT 18

## Application information

### *Current handling*

One of the purposes of VPS is to drain the holes that are generated during exposure of the sensor to light. Free electrons are either transported to the VRD connection and, if excessive (from over-exposure), free electrons are drained to VNS. No current should flow into any VPS connection of the sensor. During high overexposure a total current 10 to 15mA through all VPS connections together may be expected. The PNP emitter follower in the circuit diagram (figure 6) serves these current requirements.

VNS drains superfluous electrons as a result of overexposure. In other words, it only sinks current. During high overexposure a total current of 10 to 15mA through all VNS connections together may be expected. The NPN emitter follower in the circuit diagram meets these current requirements.

### *Decoupling of DC voltages*

All DC voltages should be decoupled with a 100nF decoupling capacitor. This capacitor must be mounted as close as possible to the sensor pin. Further noise reduction (by bandwidth limiting) is achieved by the resistors in the connections between the sensor and its voltage supplies. The electrons that build up the charge packets that will reach the floating diffusions only add up to a small current, which will flow through VRD. Therefore a large series resistor in the VRD connection may be used.

### *Outputs*

To limit the on-chip power dissipation, the output buffers are designed with open source outputs. Outputs to be used should therefore be loaded with a current source or more simply with a resistance to GND. In order to prevent the output (which typically has an output impedance of about 400Ω) from bandwidth limitation as a result of capacitive loading, load the output with an emitter follower built from

a high-frequency transistor. Mount the base of this transistor as close as possible to the sensor and keep the connection between the emitter and the next stage short. The CCD output buffer can easily be destroyed by ESD. By using this emitter follower, this danger is suppressed; do NOT reintroduce this danger by measuring directly on the output pin of the sensor with an oscilloscope probe. Instead, measure on the output of the emitter follower. Slew rate limitation is prevented by avoiding a too-small quiescent current in the emitter follower; about 10mA should do the job. The collector of the emitter follower should be decoupled properly to suppress the Miller effect from the base-collector capacitance.

A CCD output load resistor of 3.3kΩ typically results in a bandwidth of 110MHz. The bandwidth can be enlarged to about 130MHz by using a resistor of 2.2kΩ instead, which, however, also enlarges the on-chip power dissipation.

### *Device protection*

The output buffers of the FT 18 are likely to be damaged if VPS rises above SFD or RD at any time. This danger is most realistic during power-on or power-off of the camera. The RD voltage should always be lower than the SFD voltage.

Never exceed the maximum output current. This may damage the device permanently. The maximum output current should be limited to 6mA.

Be especially aware that the output buffers of these image sensors are very sensitive to ESD damage.

Because of the fact that our CCDs are built on an n-type substrate, we are dealing with some parasitic npn transistors. To avoid activation of these transistors during switch-on and switch-off of the camera, we recommend the application diagram of figure 6.

# Frame Transfer CCD Image Sensor

**FT 18**

## Device Handling

An image sensor is a MOS device which can be destroyed by electro-static discharge (ESD). Therefore, the device should be handled with care.

Always store the device with short-circuiting clamps or on conductive foam. Always switch off all electric signals when inserting or removing the sensor into or from a camera (the ESD protection in the CCD image sensor process is less effective than the ESD protection of standard CMOS circuits).

Being a high quality optical device, it is important that the cover glass remain undamaged. When handling the sensor, use fingercots.

When cleaning the glass we recommend using ethanol (or possibly water). Use of other liquids is strongly discouraged:

- if the cleaning liquid evaporates too quickly, rubbing is likely to cause ESD damage.
- the cover glass and its coating can be damaged by other liquids.

Rub the window carefully and slowly.

Dry rubbing of the window may cause electro-static charges or scratches which can destroy the device.

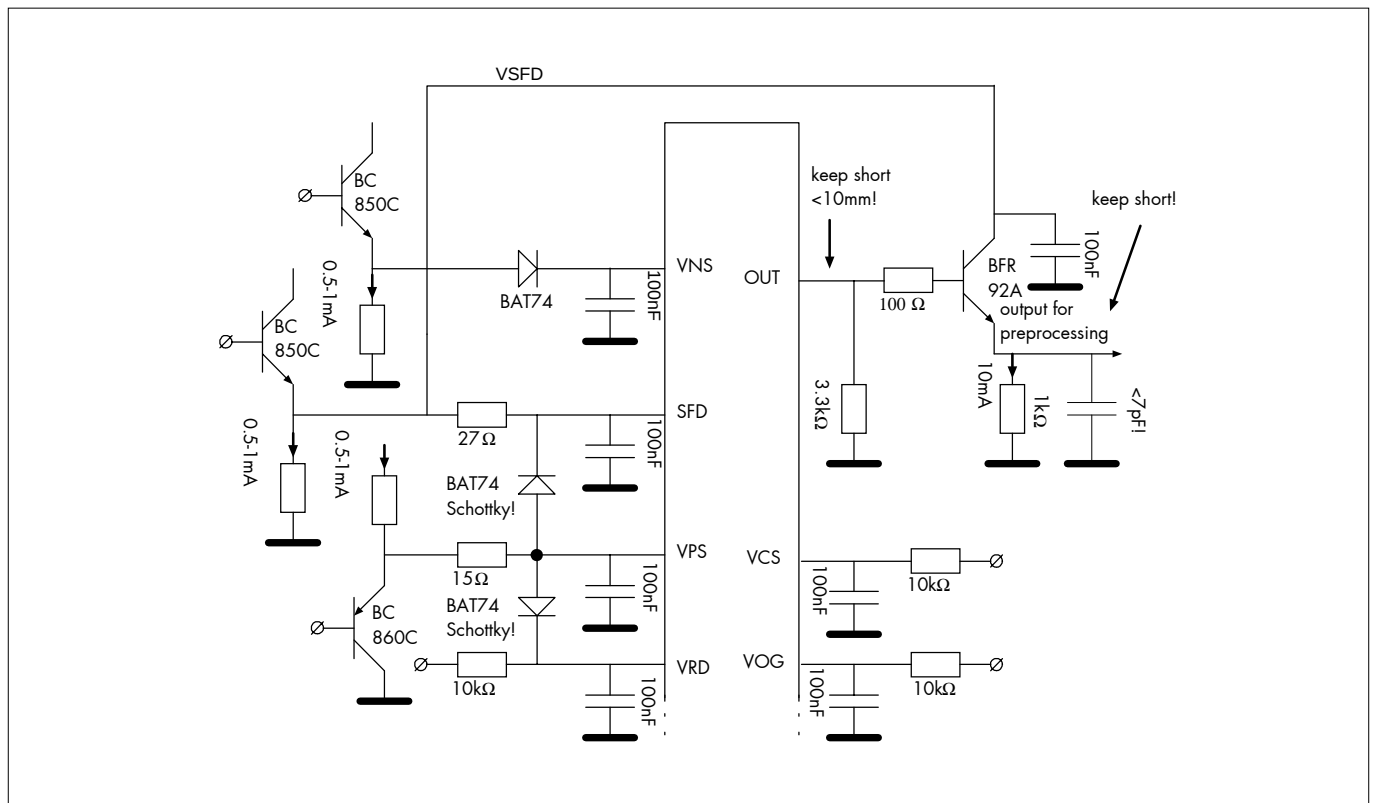


Figure 6 - Application diagram to protect the FT 18

# Frame Transfer CCD Image Sensor

**FT 18**

## Pin configuration

The FT18 is mounted in a ceramic DIL 32-pin package.

The position of pin 1 is marked with a white dot on top of the package.

| Pinning |                              |       |
|---------|------------------------------|-------|
| Symbol  | Name                         | Pin # |
| VNS     | N substrate                  | 12    |
| VNS     | N substrate                  | 21    |
| VPS     | P well                       | 5     |
| VPS     | P well                       | 28    |
| SFDL    | Source Follower Drain Left   | 9     |
| SFDR    | Source Follower Drain Right  | 24    |
| SFSL    | Source Follower Source Left  | 8     |
| SFSR    | Source Follower Source Right | 25    |
| VCSL    | Current Source Gate Left     | 7     |
| VCSR    | Current Source Gate Right    | 26    |
| OGI     | Output Gate left             | 6     |
| OGR     | Output Gate Right            | 27    |
| RDL     | Reset Drain Left             | 11    |
| RDR     | Reset Drain Right            | 22    |
| A1      | Image Clock (Phase 1)        | 3     |
| A2      | Image Clock (Phase 2)        | 4     |
| A3      | Image Clock (Phase 3)        | 30    |
| A4      | Image Clock (Phase 4)        | 29    |
| B1      | Storage Clock (Phase 1)      | 1     |
| B2      | Storage Clock (Phase 2)      | 2     |
| B3      | Storage Clock (Phase 3)      | 32    |
| B4      | Storage Clock (Phase 4)      | 31    |
| C1      | Register Clock (Phase 1)     | 14    |
| C1      | Register Clock (Phase 1)     | 19    |
| C2      | Register Clock (Phase 2)     | 15    |
| C2      | Register Clock (Phase 2)     | 18    |
| C3      | Register Clock (Phase 3)     | 16    |
| C3      | Register Clock (Phase 3)     | 17    |
| RGL     | Reset Gate Left              | 13    |
| RGR     | Reset Gate Right             | 20    |
| OUTL    | Output Left                  | 10    |
| OUTR    | Output Right                 | 23    |

## Frame Transfer CCD Image Sensor

FT 18


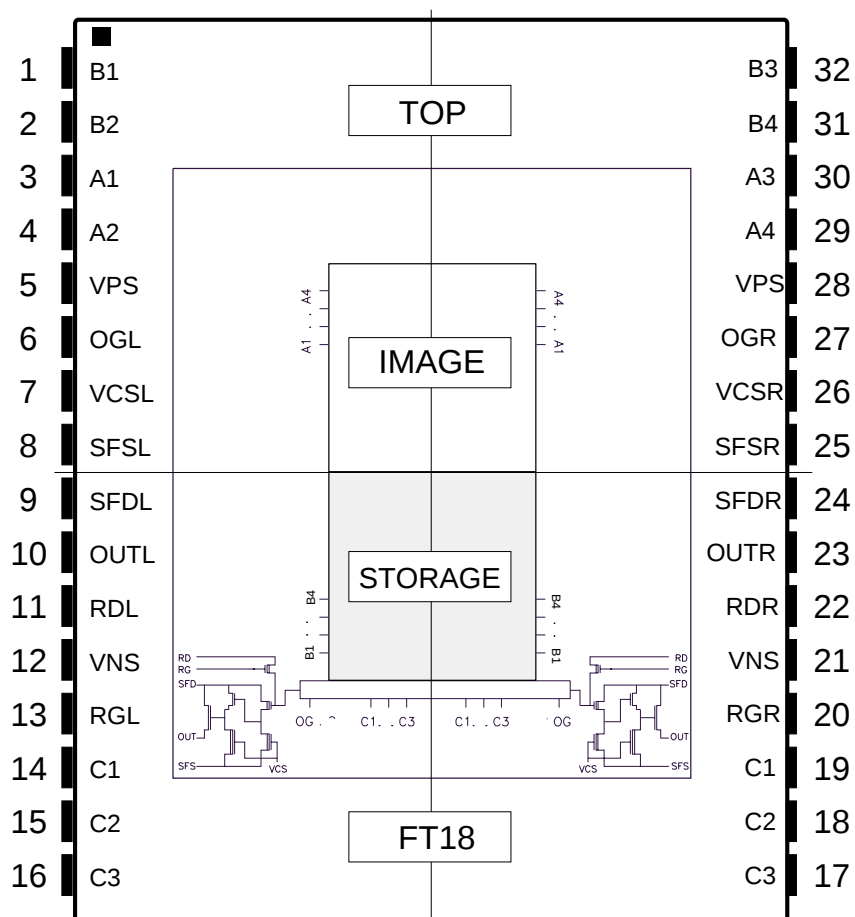


Figure 7 - FT18 pin configuration (top view)

## Frame Transfer CCD Image Sensor

FT 18

## Package information

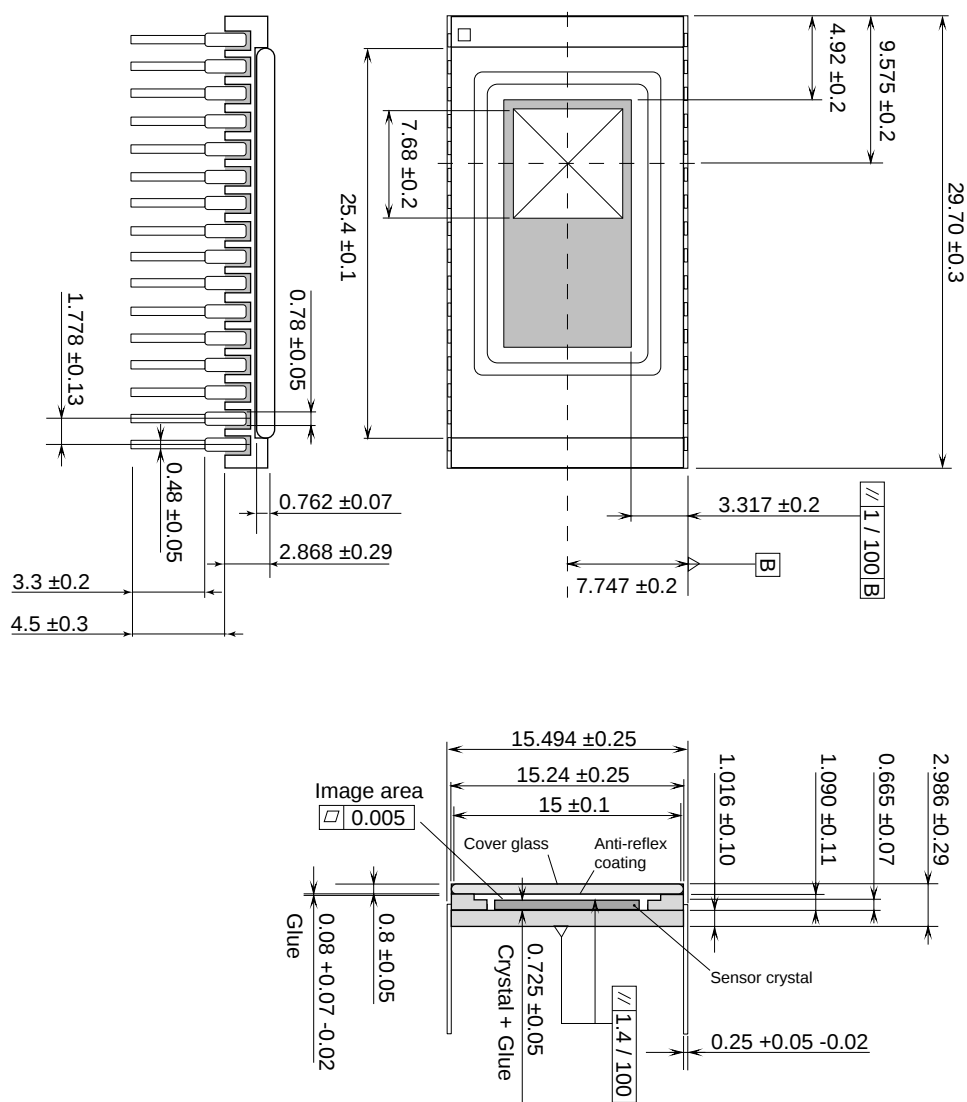

Angle of rotation: less than  $\pm 1^\circ$

Sensor flatness:  $< 7 \text{ } \mu\text{m}$  (P-V)

Cover glass: Corning 7059

Thickness of cover glass:  $0.8 \pm 0.05$

Refractive index:  $n_d = 1.53$ 

Single sided AR coating inside, 21% reflection (430-660 nm)

All drawing units are in mm.

**Figure 8 - Mechanical drawing of the FT 18 package**

# Frame Transfer CCD Image Sensor

**FT 18****Order codes**

The sensor can be ordered using the following code:

| FT18 sensors |                  |                |
|--------------|------------------|----------------|
| Description  | Quality Grade    | Order Code     |
| FT18/TG      | Test grade       | 9922 157 32031 |
| FT18/IG      | Industrial grade | 9922 157 32021 |
| FT18/HG      | High grade       | 9922 157 32011 |
| FT18/SG      | Selected grade   | 9922 157 32001 |

You can contact the Image Sensors division of Philips Semiconductors at the following address:

Philips Semiconductors  
Image Sensors  
Internal Postbox WAG-05  
Prof. Holstlaan 4  
5656 AA Eindhoven  
The Netherlands

phone +31 - 40 - 27 44 400  
fax +31 - 40 - 27 44 090

[www.semiconductors.philips.com/imagers/](http://www.semiconductors.philips.com/imagers/)

*Let's make things better.*