

## ***ML65 Series DC-DC Converter***

### **❖ Application**

- ◆ Power Source of Portable Products
- ◆ Palmtops
- ◆ Portable Cameras and Video Recorders
- ◆ Wireless mouse and keyboard

### **❖ Ordering Information**

**ML65XXXX**  
 ↑ ↑ ↑ ↑  
 a b c d

Designator	Description
a	<b>Version</b>
b	<b>Output Voltage</b> eg. 30=3.0V 33=3.3V 50=5.0V
c	<b>Package Type</b> P = SOT-89 M = SOT-23 T = TO-92
d	<b>Device Orientation</b> R = Embossed Tape (Orientation of Device : Right) L = Embossed Tape (Orientation of Device : Left) B = Bag (TO-92)

### **❖ Features**

- Small number of external components: inductor, diode and capacitor.
- Ultra low input current: Typical 6uA
- Output Voltage Accuracy : +/- 2.5 %
- Low ripple and noise
- Low startup voltage : Max 0.9V (with 1mA input)
- High Efficiency: Typical 80%
- Package Available:  
SOT-89(500mW), SOT-23(150mW) & TO-92 (300mW)

### **❖ General Description**


The ML65 is a group of PWM Step-up DC/DC converter IC with ultra-low supply current by CMOS process.

It consists of an oscillator, a PWM control circuit, a Lx switch driver transistor, a reference voltage unit, an error amplifier for voltage detection and an Lx switch protection circuit. It is suitable for use with battery-powered instruments with low noise and ultra low supply current.

ML65 Version	Package Designator	Package	Switching Transistor	CE Function	VDD Pin	FB Pin	Features
ML65A	M	SOT23-3	Build-in Transistor	No	No	No	Lx
	P	SOT89-3					
	T	TO-92					
ML65B	M	SOT23-3	External Transistor	No	No	No	Ext
	P	SOT89-3					
	T	TO-92					
ML65C	M	SOT23-5	Build-in Transistor	Yes	No	No	Lx+CE
	P	SOT89-5					
ML65D	M	SOT23-5	External Transistor	Yes	No	No	Ext+CE
	P	SOT89-5					
ML65E	M	SOT23-5	Build-in Transistor	No	Yes	No	Lx+VDD
	P	SOT89-5					
ML65F	M	SOT23-5	Build-in Transistor	No	Yes	Yes	FB
	P	SOT89-5					


❖ ***ML65A***

◆ ***Pin Configuration***

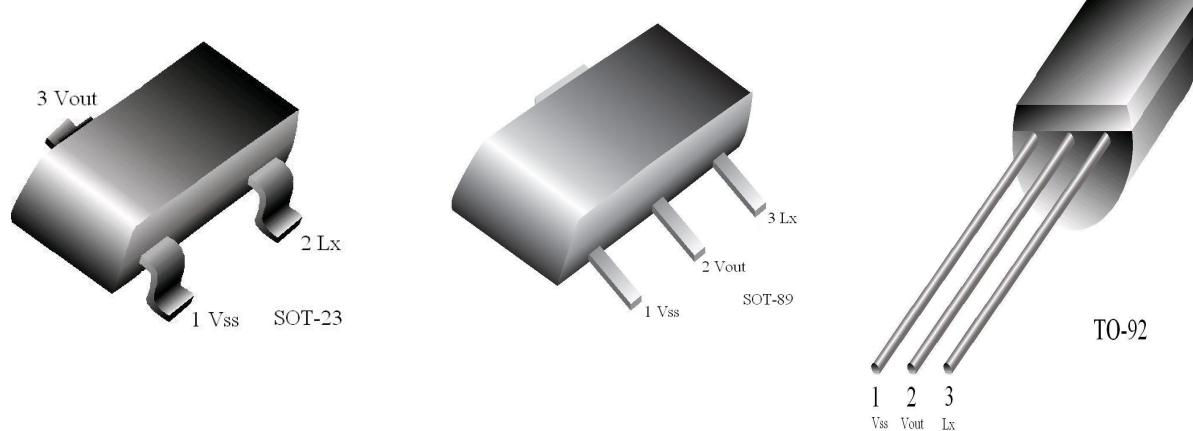


Package Pin Number			Pin Name	Function
SOT23-3	SOT89-3	TO-92		
1	1	1	V <sub>SS</sub>	Ground
3	2	2	V <sub>out</sub>	Output Voltage monitor, Internal IC Power Supply
2	3	3	L <sub>X</sub>	Switch

◆ ***Block Diagram***

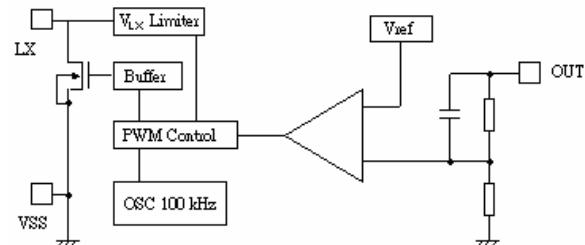


◆ ***Typical Applications***

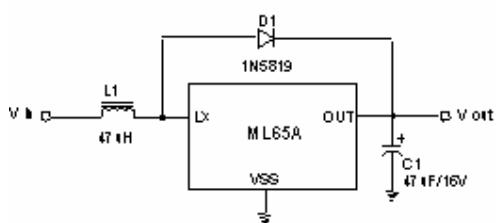


## ❖ ***ML65B***

### ◆ *Pin Configuration*

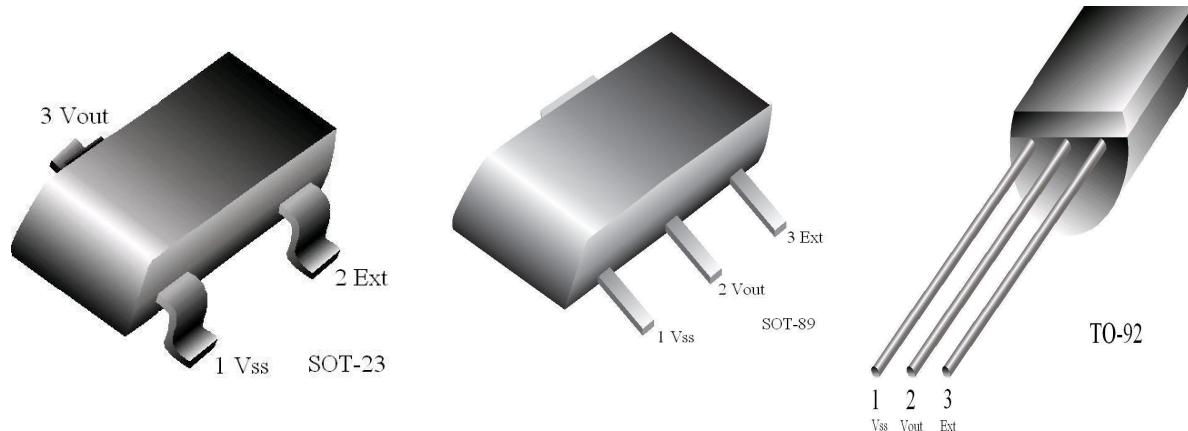


Package Pin Number			Pin Name	Function
SOT23-3	SOT89-3	TO-92		
1	1	1	V <sub>SS</sub>	Ground
3	2	2	V <sub>out</sub>	Output Voltage monitor, Internal IC Power Supply
2	3	3	EXT	External Switch Transistor Drive

### ◆ *Block Diagram*

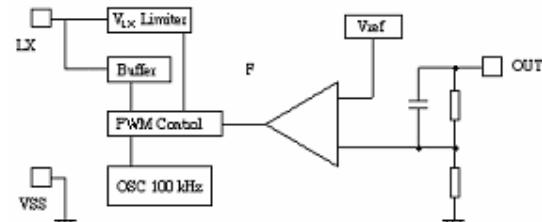


### ◆ *Typical Applications*

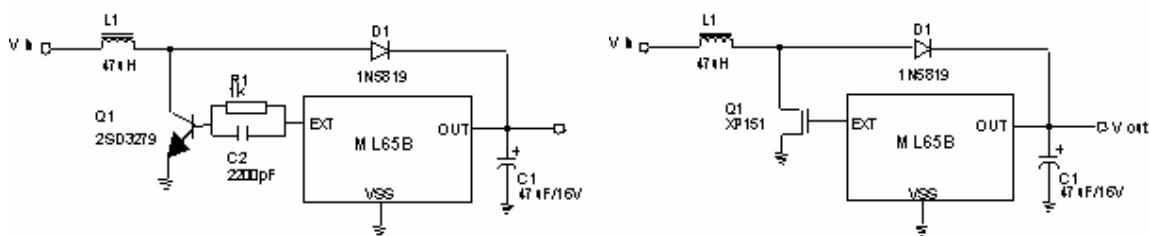


❖ ***ML65C***

◆ ***Pin Configuration***

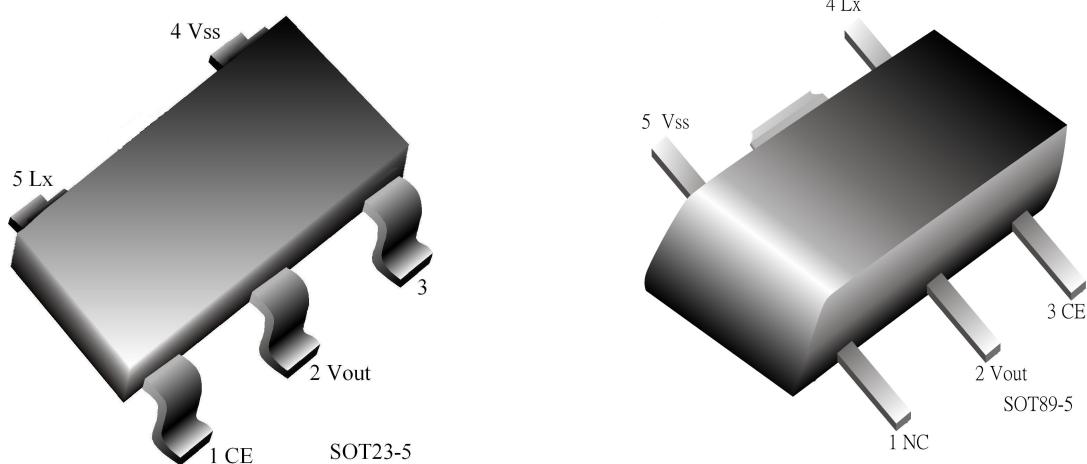


<b>Package Pin Number</b>		<b>Pin Name</b>	<b>Function</b>
<b>SOT23-5</b>	<b>SOT89-5</b>		
4	5	V <sub>SS</sub>	Ground
2	2	V <sub>OUT</sub>	Output Voltage monitor, Internal IC Power Supply
5	4	Lx	Switch
1	3	CE	Chip Enable
3	1	NC	NC

◆ ***Block Diagram***

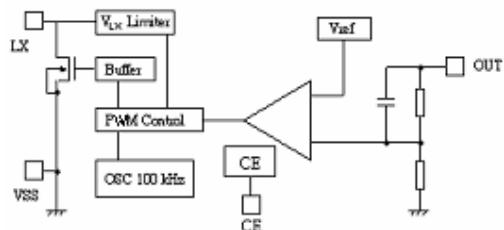


◆ ***Typical Applications***

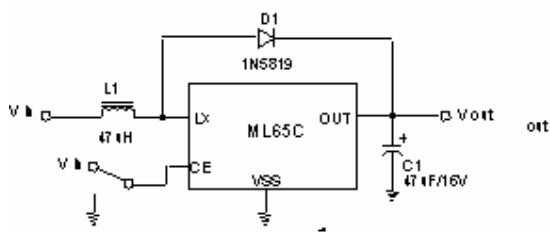


## ❖ *ML65D*

### ◆ *Pin Configuration*

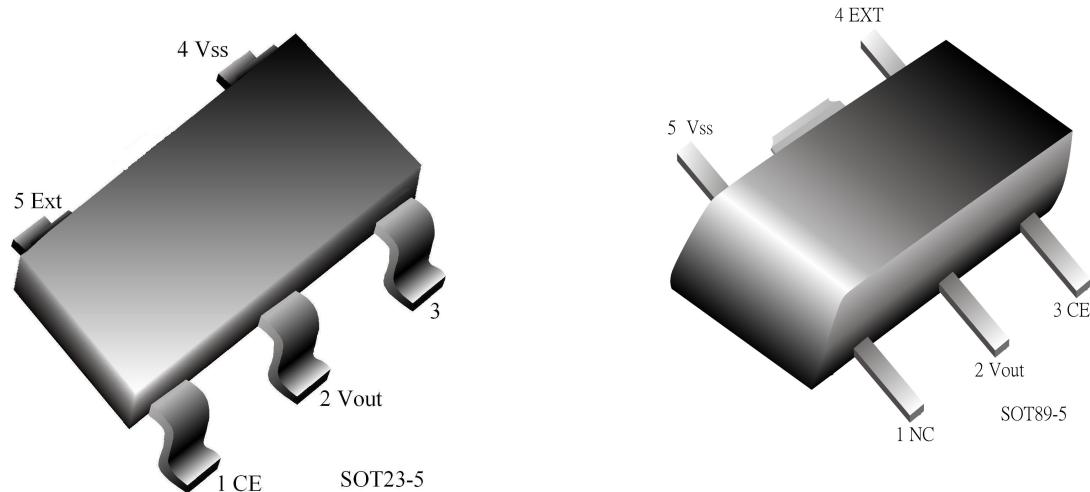


<b>Package Pin Number</b>		<b>Pin Name</b>	<b>Function</b>
<b>SOT23-5</b>	<b>SOT89-5</b>		
4	5	V <sub>SS</sub>	Ground
2	2	V <sub>OUT</sub>	Output Voltage monitor, Internal IC Power Supply
5	4	EXT	External Switch Transistor Drive
1	3	CE	Chip Enable
3	1	NC	NC

### ◆ *Block Diagram*


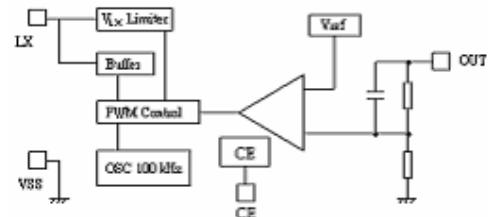


### ◆ *Typical Applications*

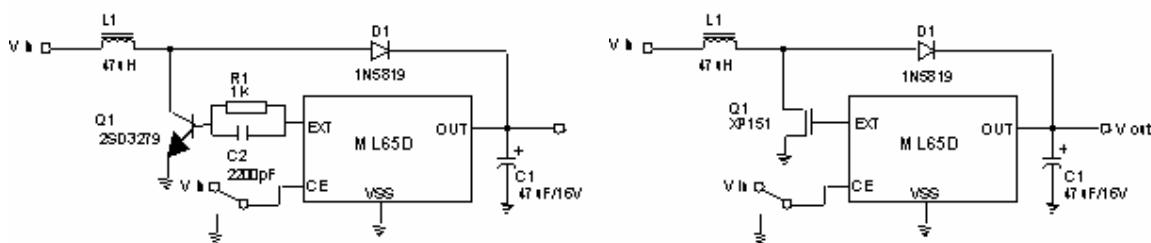


❖ ***ML65E***

◆ ***Pin Configuration***

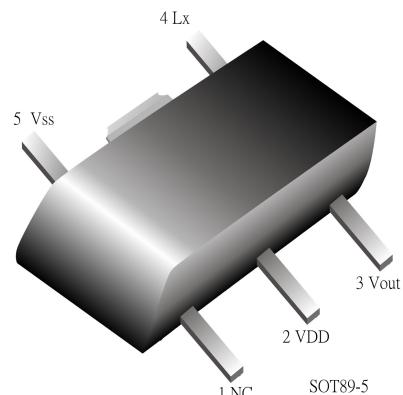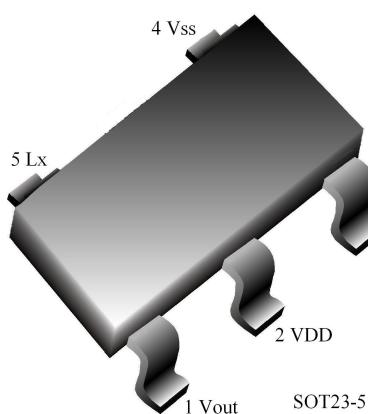


Package Pin Number		Pin Name	Function
SOT23-5	SOT89-5		
4	5	V <sub>SS</sub>	Ground
2	2	V <sub>DD</sub>	Power Supply
5	4	L <sub>X</sub>	Switch
1	3	V <sub>OUT</sub>	Output Voltage Monitor
3	1	NC	NC

◆ ***Block Diagram***


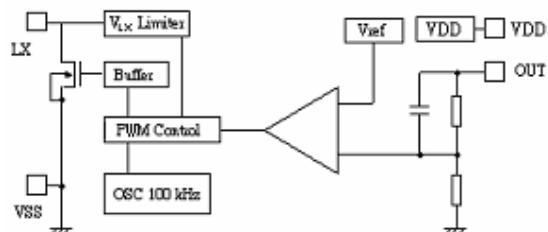


◆ ***Typical Applications***

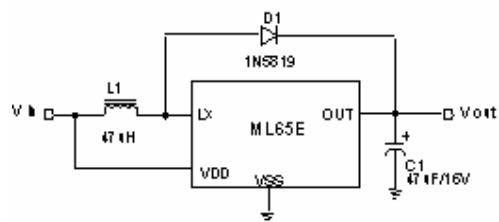


❖ ***ML65F***

◆ ***Pin Configuration***

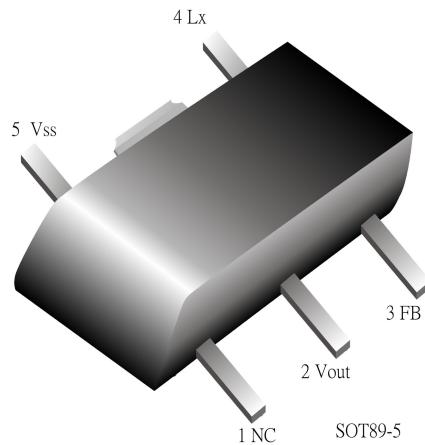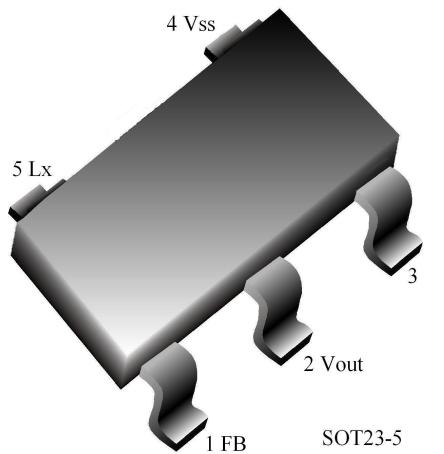


<b>Package Pin Number</b>		<b>Pin Name</b>	<b>Function</b>
<b>SOT23-5</b>	<b>SOT89-5</b>		
4	5	V <sub>SS</sub>	Ground
2	2	V <sub>OUT</sub>	Power Supply
5	4	Lx	Switch
1	3	FB	Feedback
3	1	NC	NC

◆ ***Block Diagram***

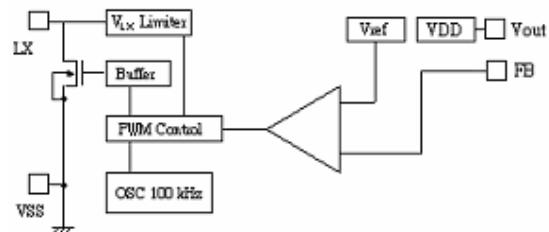

◆ ***Typical Applications***

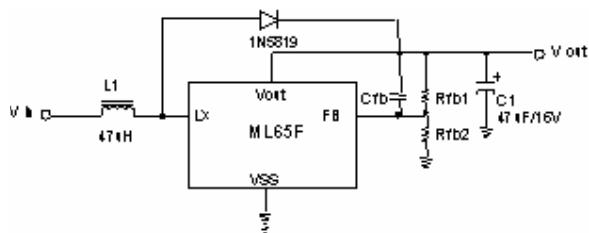

## ❖ Absolute Maximum Ratings

Parameter	Symbol	Ratings	Units
Input Voltage	V <sub>IN</sub>	10	V
V <sub>DD</sub> Input Voltage	V <sub>DD</sub>	10	V
Lx Pin Voltage	V <sub>LX</sub>	10	V
EXT Pin Voltage	V <sub>EXT</sub>	-0.3 ~ V <sub>OUT</sub> + 0.3	V
CE Pin Voltage	V <sub>C E</sub>	-0.3 ~ V <sub>OUT</sub> + 0.3	V
Lx Pin Current	I <sub>LX</sub>	600	mA
EXT Pin Current	I <sub>EXT</sub>	± 30	mA
Continuous Total Power Dissipation	SOT-89	500	mW
	TO-92	300	
	SOT-23	150	
Operating Ambient Temperature	Topr	-25 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +125	°C

## ❖ Electrical Characteristics

V<sub>IN</sub> = V<sub>OUT</sub> \* 0.6, V<sub>SS</sub> = 0V, I<sub>OUT</sub> = 10mA, T<sub>a</sub> = 25 °C, unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output Voltage	V <sub>OUT</sub>		Vout * 0.975	Vout	Vout * 1.025	V
Input Voltage	V <sub>IN</sub>				8	V
Startup Voltage	V <sub>START</sub>	I <sub>OUT</sub> = 1mA, V <sub>IN</sub> : 0 → 2V		0.8	0.9	V
Hold-on Voltage	V <sub>HOLD</sub>	I <sub>OUT</sub> = 1mA, V <sub>IN</sub> : 2 → 0V	0.7			V
Supply Current 1	I <sub>DD1</sub>	No external component, V <sub>IN</sub> = V <sub>OUT</sub> * 0.95		30~70		uA
Supply Current 2	I <sub>DD2</sub>	V <sub>IN</sub> = V <sub>IN</sub> + 0.5V		11~26		uA
Lx Switching Current	I <sub>LX</sub>	V <sub>LX</sub> = 0.4V, V <sub>IN</sub> = V <sub>OUT</sub> * 0.95		250		mA
Lx Leakage Current	I <sub>LXLEAK</sub>	V <sub>IN</sub> = V <sub>LX</sub> = 6.0V			0.5	uA
EXT "High" On Current	I <sub>EXTH</sub>	No external component, V <sub>IN</sub> = V <sub>OUT</sub> * 0.95, V <sub>EXT</sub> = V <sub>OUT</sub> - 0.4V		-5.5		mA
EXT "Low" On Current	I <sub>EXTL</sub>	No external component, V <sub>IN</sub> = V <sub>OUT</sub> * 0.95, V <sub>EXT</sub> = 0.4V		13		mA
CE "High" Voltage	V <sub>CEH</sub>	V <sub>IN</sub> = V <sub>OUT</sub> * 0.95	0.7			V
CE "Low" Voltage	V <sub>CEL</sub>	V <sub>IN</sub> = V <sub>OUT</sub> * 0.95			0.2	V
CE "High" Current	I <sub>CEH</sub>	V <sub>OUT</sub> = 6.0V, V <sub>CE</sub> = 6.0V			0.25	uA
CE "Low" Current	I <sub>CEL</sub>	V <sub>OUT</sub> = 6.0V, V <sub>CE</sub> = 0.0V			-0.25	uA
Oscillator Frequency	F <sub>OSC</sub>			100		KHz
Duty Cycle	MAXDTY		80	87	92	%
Efficiency	EFF			85		%
Slow-Start Time	T <sub>SS</sub>		5	15	25	ms

Note : 1. Schokkty diode: IN5817 or IN5819 (forward voltage drop : 0.2V)

2. Inductor : 47uH (ESR < 0.5Ω)

3. Capacitor : Tantalum type, 47 uF

## ❖ Electrical Characteristics

**ML65A30**  $V_{OUT} = 3.0V$   $V_{IN} = 1.8V$ ,  $I_{OUT} = 10mA$ ,  $Ta = 25^{\circ}C$ , unless otherwise provided.

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output Voltage	$V_{OUT}$		2.925	3.000	3.075	V
Input Voltage	$V_{IN}$				8	V
Startup Voltage	$V_{START}$	$I_{OUT} = 1mA$		0.8	0.9	V
Hold-on Voltage	$V_{HOLD}$	$I_{OUT} = 1mA$	0.7			V
Supply Current 1	$I_{DD1}$	$V_{IN} = 2.85V$		30		uA
Supply Current 2	$I_{DD2}$	$V_{IN} = 3.05V$		11		uA
Lx Switching Current	$I_{LX}$	$V_{LX}=0.4V$ , $V_{IN}=2.85V$		250		mA
Lx Leakage Current	$I_{LXLEAK}$	$V_{IN}=6.0V$ , $V_{LX}=6.0V$			0.5	uA
Oscillator Frequency	$F_{OSC}$			100	150	KHz
Oscillator Duty Cycle	$MAXDTY$		80	87	92	%
Efficiency	$EFF$			85		%
Slow -Start Time	$T_{SS}$		5	15	25	ms

**ML65A33**  $V_{OUT} = 3.3V$   $V_{IN} = 2.0V$ ,  $I_{OUT} = 10mA$ ,  $Ta = 25^{\circ}C$ , unless otherwise provided.

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output Voltage	$V_{OUT}$		3.218	3.300	3.383	V
Input Voltage	$V_{IN}$				8	V
Startup Voltage	$V_{START}$	$I_{OUT} = 1mA$		0.8	0.9	V
Hold-on Voltage	$V_{HOLD}$	$I_{OUT} = 1mA$	0.7			V
Supply Current 1	$I_{DD1}$	$V_{IN} = 3.135V$		33		uA
Supply Current 2	$I_{DD2}$	$V_{IN} = 3.35V$		12		uA
Lx Switching Current	$I_{LX}$	$V_{LX}=0.4V$ , $V_{IN}=3.135V$		260		mA
Lx Leakage Current	$I_{LXLEAK}$	$V_{IN}=6.0V$ , $V_{LX}=6.0V$			0.5	uA
Oscillator Frequency	$F_{OSC}$			100	150	KHz
Oscillator Duty Cycle	$MAXDTY$		80	87	92	%
Efficiency	$EFF$			85		%
Slow -Start Time	$T_{SS}$		5	15	25	ms

**ML65A50**  $V_{OUT} = 5.0V$   $V_{IN} = 3.0V$ ,  $I_{OUT} = 10mA$ ,  $Ta = 25^{\circ}C$ , unless otherwise provided.

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output Voltage	$V_{OUT}$		4.875	5.000	5.125	V
Input Voltage	$V_{IN}$				8	V
Startup Voltage	$V_{START}$	$I_{OUT} = 1mA$		0.8	0.9	V
Hold-on Voltage	$V_{HOLD}$	$I_{OUT} = 1mA$	0.7			V
Supply Current 1	$I_{DD1}$	$V_{IN} = 4.75V$		70		uA
Supply Current 2	$I_{DD2}$	$V_{IN} = 5.05V$		26		uA
Lx Switching Current	$I_{LX}$	$V_{LX}=0.4V$ , $V_{IN}=4.75V$		290		mA
Lx Leakage Current	$I_{LXLEAK}$	$V_{IN}=6.0V$ , $V_{LX}=6.0V$			0.5	uA
Oscillator Frequency	$F_{OSC}$			100	150	KHz
Oscillator Duty Cycle	$MAXDTY$		80	87	92	%
Efficiency	$EFF$			85		%
Slow -Start Time	$T_{SS}$		5	15	25	ms

## ❖ *Application Notes*

1. It is recommended to use capacitor with a capacity of 10uF or more for good frequency characteristics, otherwise it will lead to high output ripple. Tantalum type capacitor is recommended. As there may be the case where a spike-shaped high voltage is generated by the inductor when Lx transistor is turned off, the operating voltage of capacitor should be at least three times of the output set voltage so as to avoid over-voltage damage.
2. It is recommended to use inductor has sufficiently small d.c. resistance, large allowable current and hardly reaches magnetic saturation. When the inductance of inductor is small, there may be the case that the inductor current exceeds the absolute maximum ratings at the maximum load condition.
3. It is recommended to place external components as close as possible to the DC/DC converter so as to minimize the interconnection parasitic between components and DC/DC converter, especially for the capacitor connected to V<sub>OUT</sub> pin. It is recommended to place 0.1uF ceramic capacitor between V<sub>OUT</sub> pin and V<sub>SS</sub> pin.
4. It is recommended to provide sufficient grounding for V<sub>SS</sub> pin. This will help to stable the zero level within DC/DC converter induced by the switching current level variation during operation. And the insufficient grounding may result in unstable operation of DC/DC converter.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.