



SAW Components

SAW Rx Filter

PCS / WCDMA Band II

Series/Type:	B9034
Ordering code:	B39202-B9034-E210
Date:	Nov 29, 2005
Version:	1

© EPCOS AG 2005. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.





SAW Components

B9034

Low-Loss Filter for Mobile Communication

1960.0 MHz

Data Sheet




Application

- Low-loss RF filter for mobile telephone PCS systems, receive path (RX)
- Useable passband 60 MHz
- Useable for antenna diversity systems
- Suitable for GPRS class 1 to 12




Features

- Package size 2.0 x 1.6 x 0.74 mm³
- Package code DCS4K
- RoHS compliant
- Approx. weight 0.009 g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals

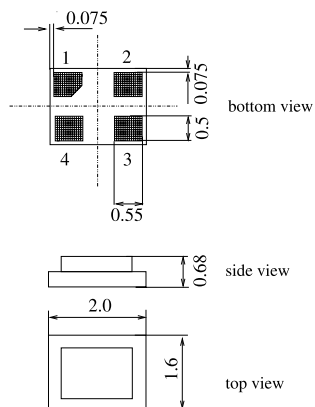

Pin configuration

- 1 Input, unbalanced
- 3 Output, unbalanced
- 2,4 To be grounded

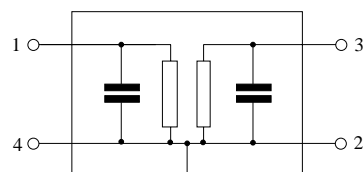



Important notes	B9034
Low-Loss Filter for Mobile Communication	1960.0 MHz

Data Sheet



Characteristics with parallel matching elements

Operating temperature range:	$T = -20\text{ °C to }+85\text{ °C}$
Terminating source impedance:	$Z_S = 50\ \Omega \parallel 56\text{ nH}$
Terminating load impedance:	$Z_L = 50\ \Omega \parallel 12\text{ nH}$

				B9034			
				min.	typ. @ 25°C	max.	
Center frequency	f_C			—	1960.0	—	MHz
Maximum insertion attenuation	α_{\max}						
1930.6 ... 1989.4	MHz			—	2.7	4.4	dB
Amplitude ripple (p-p)	$\Delta\alpha$						
1930.6 ... 1989.4	MHz			—	1.2	2.9	dB
Input return loss							
1930.6 ... 1989.4	MHz			—	12	9	dB
Output return loss							
1930.6 ... 1989.4	MHz			—	11	8	dB
Attenuation	α						
DC ... 1850.6	MHz			40	48	—	dB
1850.6 ... 1909.4	MHz			46	48	—	dB
2040.0 ... 2070.0	MHz			35	47	—	dB
2070.0 ... 4500.0	MHz			35	46	—	dB
4500.0 ... 5200.0	MHz			28	35	—	dB
5200.0 ... 6000.0	MHz			18	24	—	dB



SAW Components	B9034
Low-Loss Filter for Mobile Communication	1960.0 MHz

Data Sheet



Characteristics with serial matching elements

Operating temperature range:	$T = -20\text{ °C to }+85\text{ °C}$
Terminating source impedance:	$Z_S = 50\ \Omega + 0.8\text{ nH}$
Terminating load impedance:	$Z_L = 50\ \Omega + 0.8\text{ nH}$

				B9034		
				min.	typ. @ 25°C	max.
Center frequency	f_C			—	1960.0	—
Maximum insertion attenuation	α_{\max}					
1930.6 ... 1989.4 MHz				—	2.7	4.3
Amplitude ripple (p-p)	$\Delta\alpha$					
1930.6 ... 1989.4 MHz				—	1.2	2.9
Input return loss						
1930.6 ... 1989.4 MHz				—	11	9
Output return loss						
1930.6 ... 1989.4 MHz				—	11	8
Attenuation	α					
DC ... 1850.6 MHz				40	48	—
1850.6 ... 1909.4 MHz				46	48	—
2040.0 ... 2070.0 MHz				35	47	—
2070.0 ... 4500.0 MHz				35	46	—
4500.0 ... 5200.0 MHz				28	35	—
5200.0 ... 6000.0 MHz				18	24	—



Important notes	B9034
Low-Loss Filter for Mobile Communication	1960.0 MHz

Data Sheet



Characteristics without matching elements

Operating temperature range:	$T = -30\text{ °C to }+85\text{ °C}$
Terminating source impedance:	$Z_S = 50\ \Omega$
Terminating load impedance:	$Z_L = 50\ \Omega$

		B9034			
		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	1960.0	—	MHz
Maximum insertion attenuation	α_{\max}				
1930.6 ... 1989.4 MHz		—	2.8	4.3 ¹⁾	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930.6 ... 1989.4 MHz		—	1.3	2.8	dB
Input return loss					
1930.6 ... 1989.4 MHz		—	9	—	dB
Output return loss					
1930.6 ... 1989.4 MHz		—	8	—	dB
Attenuation	α				
DC ... 1850.6 MHz		40	49	—	dB
1850.6 ... 1909.4 MHz		46	49	—	dB
2040.0 ... 2070.0 MHz		35	48	—	dB
2070.0 ... 4500.0 MHz		35	46	—	dB
4500.0 ... 5200.0 MHz		28	35	—	dB
5200.0 ... 6000.0 MHz		18	24	—	dB

¹⁾ 4.0 dB max. for 0 °C to 85 °C (with pcb losses deembedded)

**SAW Components****B9034****Low-Loss Filter for Mobile Communication****1960.0 MHz**

Data Sheet

**Maximum ratings**

Operable temperature range	T	-30/+85	°C	
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	5	V	
ESD voltage	V _{ESD}	50 ¹⁾	V	machine model, 10 pulses
Input Power at PCS Tx band	P _{IN}	15	dBm	CW signal for 2000h at T=50 °C

¹⁾ acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.



Important notes

B9034


Low-Loss Filter for Mobile Communication

1960.0 MHz


Data Sheet



Transfer function

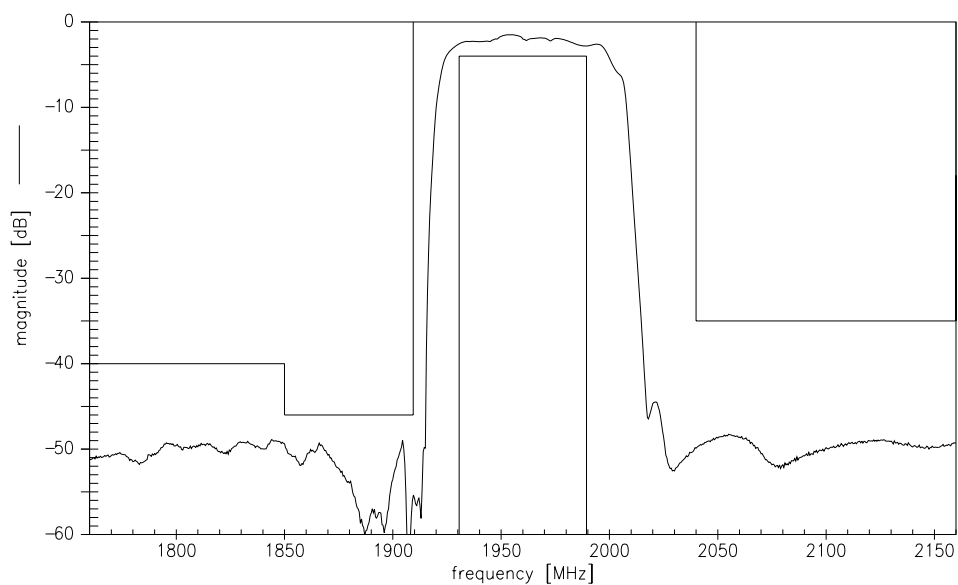

Transfer function (wideband)

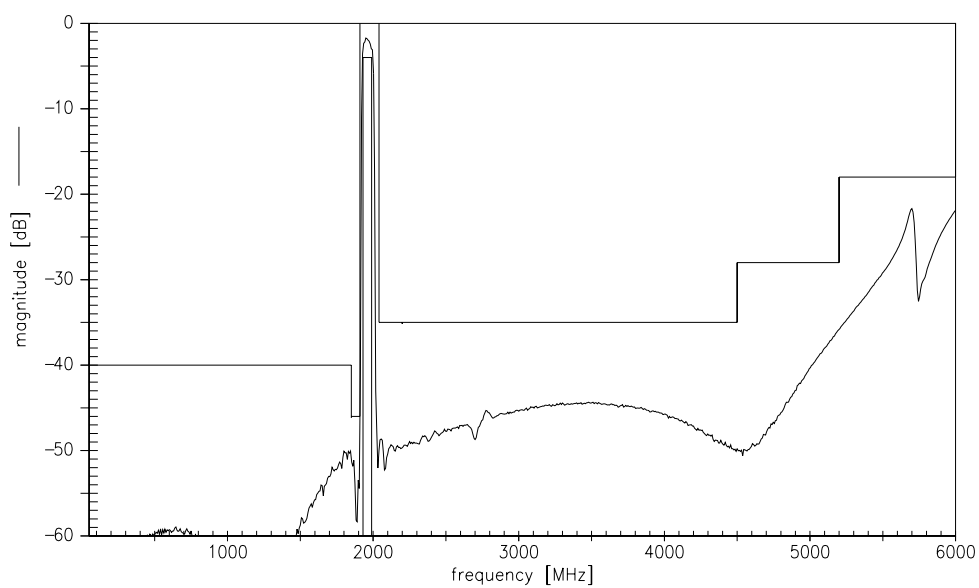



SAW Components	B9034
Low-Loss Filter for Mobile Communication	1960.0 MHz
Data Sheet	SMD

Type	B9034	
Ordering code	B39202-B9034-E210	
Marking and Package	C61157-A7-A144	
Packaging	F61074-V8152-Z000	
Date Codes	L_1126	
S-Parameters	B9034_NB.s3p B9034_WB.s3p	
Soldering profile	S_6001	

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

**Published by EPCOS AG
Surface Acoustic Wave Components Division
P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. The warnings, cautions and product-specific notes must be observed.
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous")**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, SilverCap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.