

IGBT MODULE (N series)


Features

- Square RBSOA
- Low Saturation Voltage
- Less Total Power Dissipation
- Improved FWD Characteristic
- Minimized Internal Stray Inductance
- Overcurrent Limiting Function (4-5 Times Rated Current)

Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

Outline Drawing

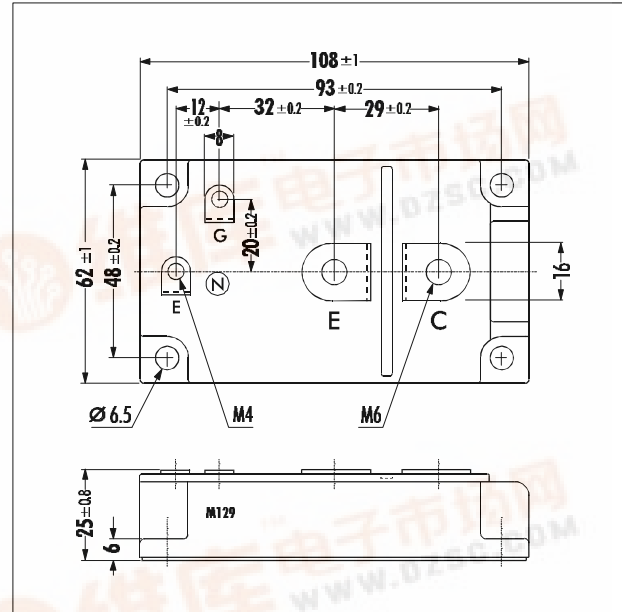


Maximum Ratings and Characteristics

Absolute Maximum Ratings (T_c=25°C)

Items	Symbols	Rated Values	Units
Collector-Emitter Voltage	V _{CES}	1200	V
Gate -Emitter Voltage	V _{GES}	± 20	V
Collector Current	I _C	300	A
Collector Current	I _{C PULSE}	600	A
Collector Current	-I _C	300	A
Collector Current	-I _{C PULSE}	600	A
Max. Power Dissipation	P _C	2100	W
Operating Temperature	T _j	+150	°C
Storage Temperature	T _{stg}	-40 ~ +125	°C
Isolation Voltage	V _{is}	2500	V
Screw Torque	Mounting *1	3.5	Nm
	Terminals *2	4.5	Nm
	Terminals *3	1.7	Nm

Note: *1:Recommendable Value; 2.5 - 3.5 Nm (M5) or (M6)
*2:Recommendable Value; 3.5 - 4.5 Nm (M6)
*3:Recommendable Value; 1.3 - 1.7 Nm (M4)

Equivalent Circuit

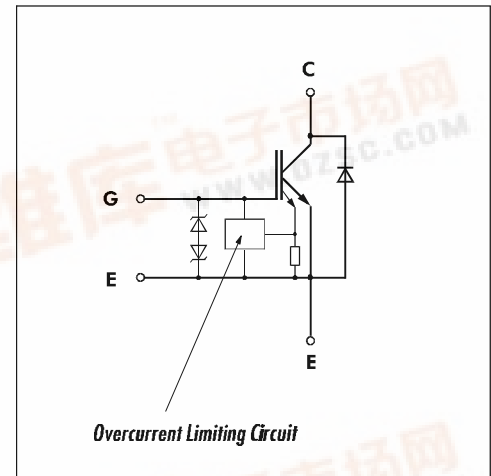

Electrical Characteristics (at T_j=25°C)


Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I _{CES}	V _{GE} =0V V _{CE} =1200V			4.0	mA
Gate-Emitter Leakage Current	I _{GES}	V _{CE} =0V V _{GE} =± 20V			60	μA
Gate-Emitter Threshold Voltage	V _{GE(th)}	V _{GE} =20V I _C =300mA	4.5		7.5	V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _{GE} =15V I _C =300A			3.3	V
Input capacitance	C _{ies}	V _{GE} =0V		48000		pF
Output capacitance	C _{oes}	V _{CE} =10V		17400		pF
Reverse Transfer capacitance	C _{res}	f=1MHz		15480		pF
Turn-on Time	t _{ON}	V _{CC} =600V		0.65	1.2	μs
	t _r	I _C =300A		0.25	0.6	μs
Turn-off Time	t _{OFF}	V _{GE} =± 15V		0.95	1.5	μs
	t _f	R _G =2.7Ω		0.35	0.5	μs
Diode Forward On-Voltage	V _F	I _F =300A V _{GE} =0V			3.0	V
Reverse Recovery Time	t _{rr}	I _F =300A			350	ns

Thermal Characteristics


Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	R _{th(j-c)}	IGBT			0.06	°C/W
	R _{th(j-e)}	Diode			0.12	°C/W




Collector current vs. Collector-Emitter voltage
 $T_j=25^\circ\text{C}$

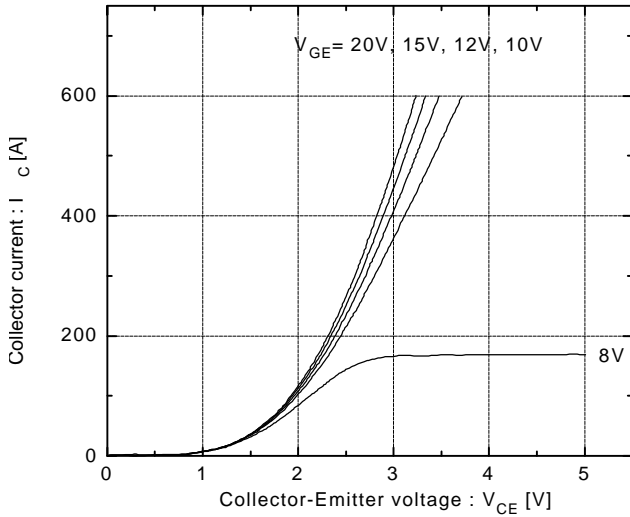


Collector current vs. Collector-Emitter voltage
 $T_j=125^\circ\text{C}$

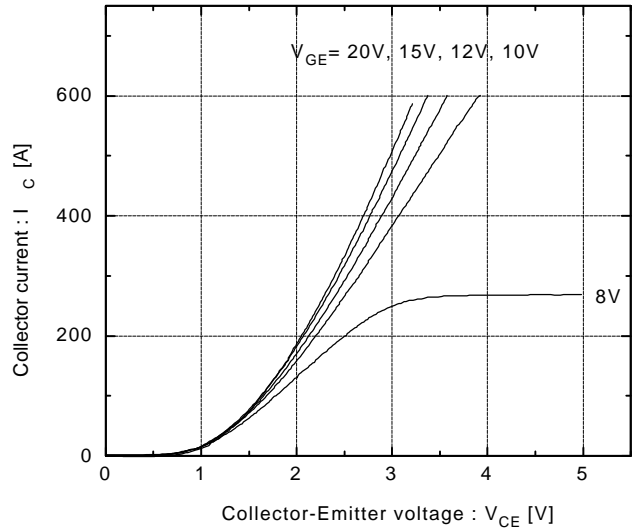


Collector-Emitter vs. Gate-Emitter voltage
 $T_j=25^\circ\text{C}$

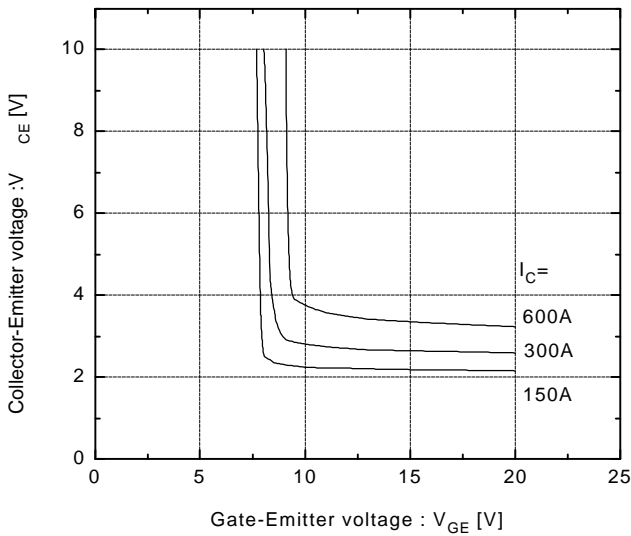


Collector-Emitter vs. Gate-Emitter voltage
 $T_j=125^\circ\text{C}$

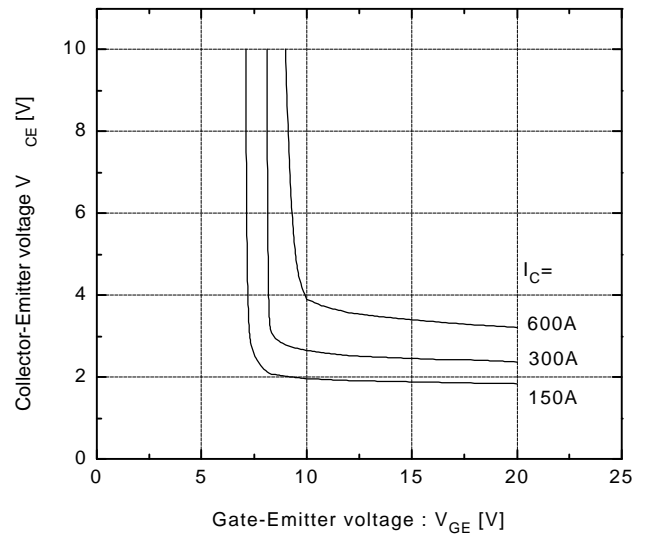

Switching time vs. Collector current
 $V_{CC}=600\text{V}, R_G=2.7\Omega, V_{GE}=\pm 15\text{V}, T_j=25^\circ\text{C}$

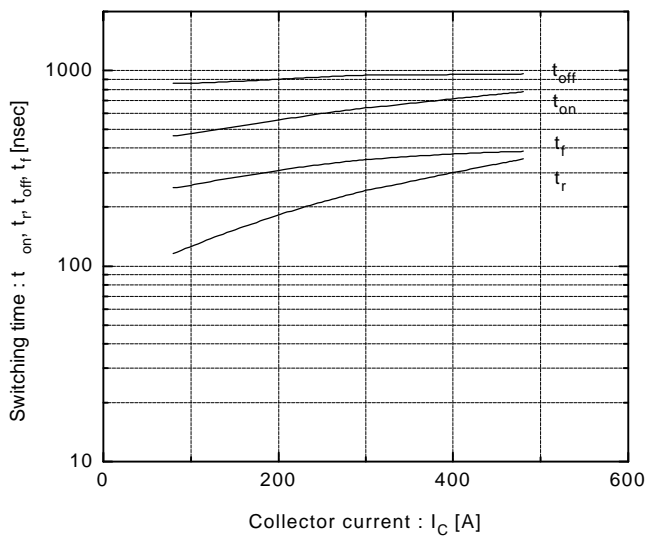


Switching time vs. Collector current
 $V_{CC}=600\text{V}, R_G=2.7\Omega, V_{GE}=\pm 15\text{V}, T_j=125^\circ\text{C}$

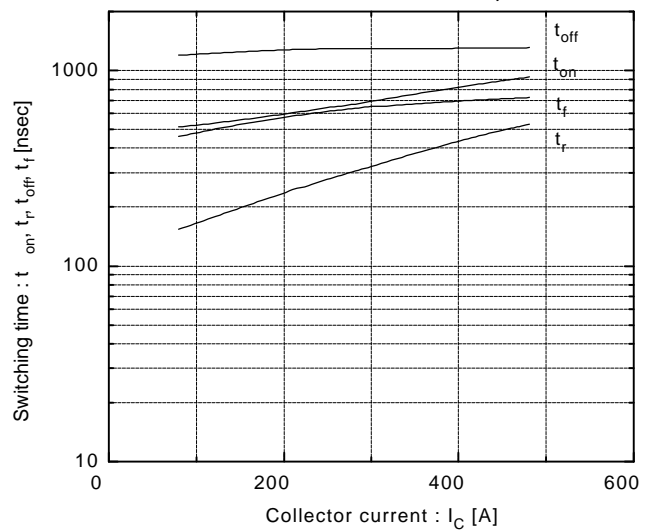

Switching time vs. R_G


$V_{CC}=600V, I_C=300A, V_{GE}=\pm 15V, T_j=25^\circ C$

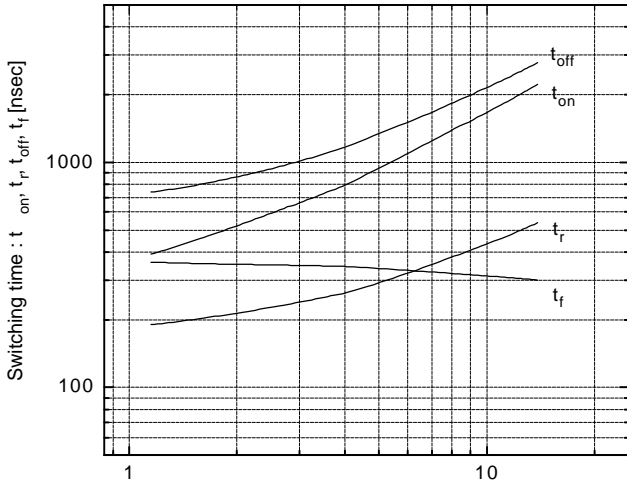

Gate resistance : $R_G [\Omega]$

Dynamic input characteristics

$T_j=25^\circ C$

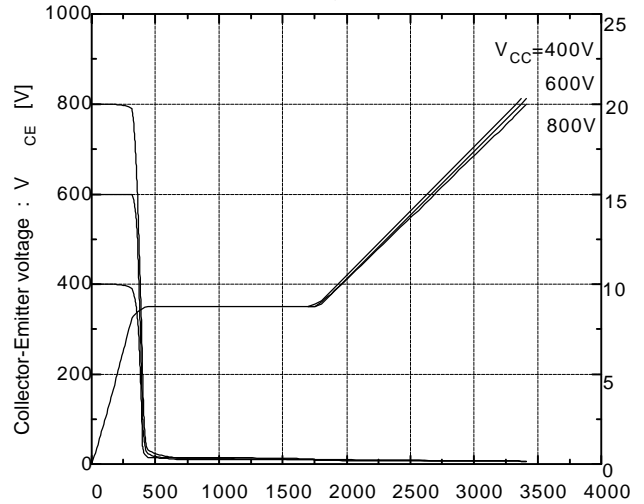


Gate charge : $Q_G [nC]$

Gate Emitter voltage : $V_{GE} [V]$

Forward current vs. Forward voltage


$V_{GE}=0V$

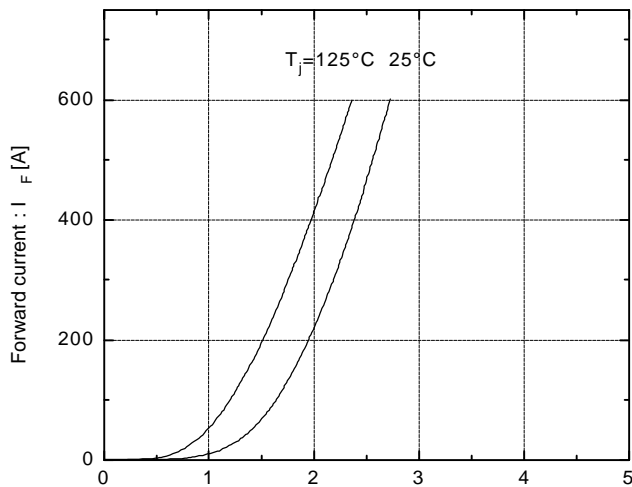

Forward voltage : $V_F [V]$


Reverse recovery characteristics

t_{rr}, I_{rr} vs. I_F

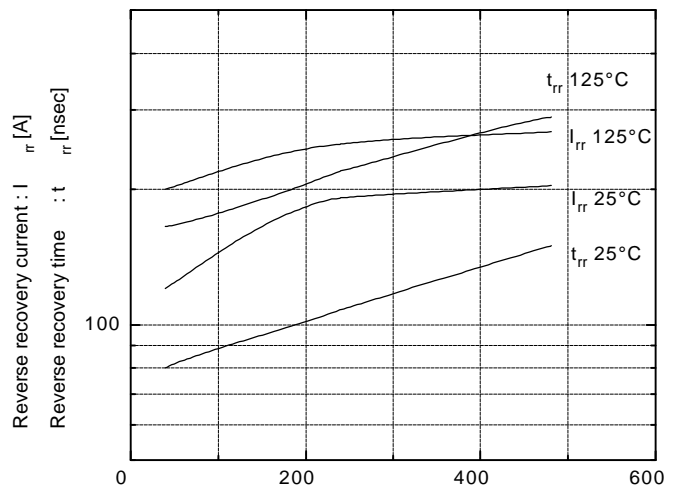

Forward current : $I_F [A]$


Transient thermal resistance

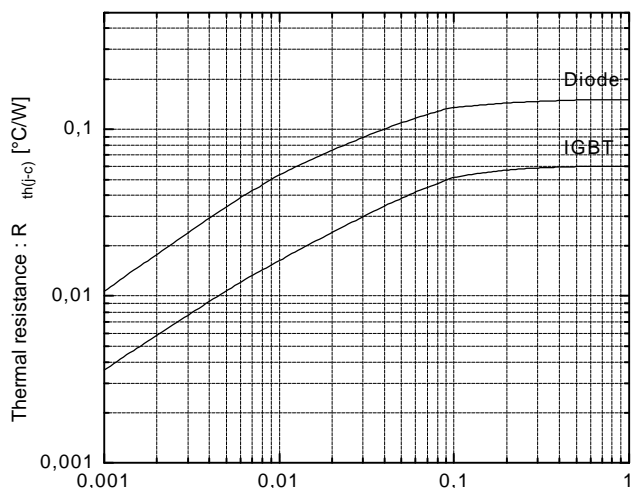

Pulse width : $PW [sec]$


Reversed biased safe operating area

$+V_{GE}=15V, -V_{GE}\leq 15V, T_j\leq 125^\circ C, R_G\geq 2.7\Omega$

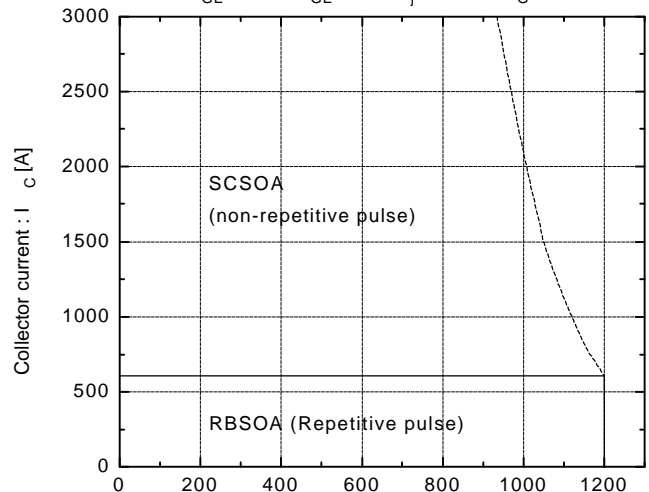


Collector-Emitter voltage : $V_{CE} [V]$

Switching loss vs. Collector current
 $V_{CC}=600V, R_G=2.7\Omega, V_{GE}=\pm 15V$

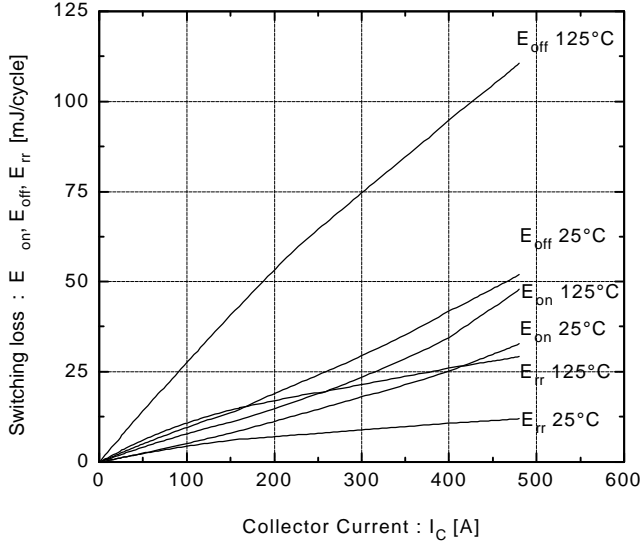

Capacitance vs. Collector-Emitter voltage
 $T_j=25^\circ C$

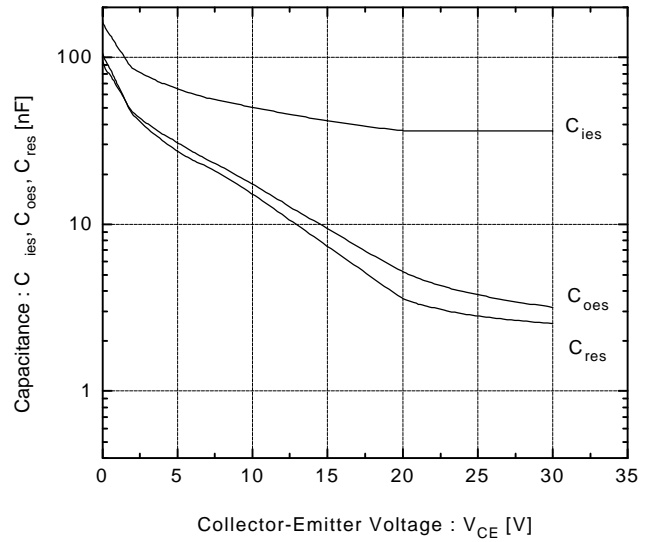

Fuji Electric GmbH

Lyoner Straße 26

D-60528 Frankfurt/M

Tel.: 069 - 66 90 29 - 0

Fax.: 069 - 66 90 29 - 56

Fuji Electric (UK) Ltd.

Commonwealth House
 2 Chalkhill Road Hammersmith

London W6 8DW, UK

Tel.: 0181 - 233 11 30

Fax.: 0181 - 233 11 60