

# XC6203 Series

[查询XC6203供应商](#)

ETR0303\_001

## Large Current Positive Voltage Regulators

### GENERAL DESCRIPTION

The XC6203 series are highly precise, low power consumption, positive voltage regulators manufactured using CMOS and laser trimming technologies.

The series provides large currents with a significantly small dropout voltage.

The XC6203P consists of a driver transistor, a current limiter, a precision reference voltage and an error amplifier. The XC6203E is also available but without the current limiter function. Output voltage is selectable in 0.1V increments between a voltage of 1.8V and 6.0V.

SOT-23 (150mW), SOT-89 (500mW), SOT-223 (1200mW) and TO-92 (300mW) package are available.

### APPLICATIONS

Battery powered equipment

Reference voltage sources

Cameras, video cameras

CD-ROMs, DVDs

Palmtops

Portable audio video equipment

### FEATURES

**Maximum Output Current** : More than 400mA (3.3V)

**Maximum Operating Voltage** : 8.0V

**Output Voltage Range** : 1.8V ~ 6.0V  
(selectable in 0.1V increments)

**Highly Accurate** :  $\pm 2\%$

**Low Power Consumption** : 8.0  $\mu$ A (TYP.)

**Line Regulation** : 0.2% / V (TYP.)

**Output Voltage Temperature Characteristics**


:  $\pm 100\text{ppm}/^\circ\text{C}$  (TYP.)

**Operational Temperature Range** : -40 ~ 85


**Dropout Voltage** : 150mV @ 100mA,  
300mV @ 200mA

**Ultra Small Packages** : SOT-23, SOT-89,  
SOT-223, TO-92

### TYPICAL APPLICATION CIRCUIT

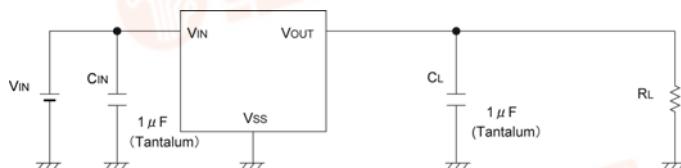


### TYPICAL PERFORMANCE CHARACTERISTICS

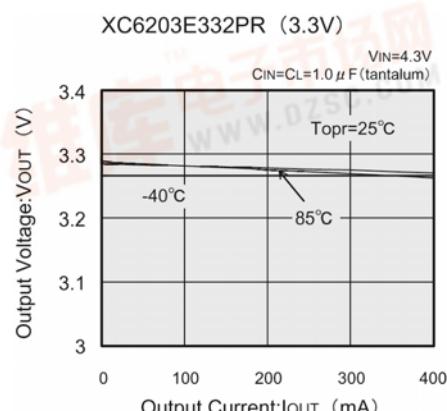

[查询XC6203供应商](#)

## PIN CONFIGURATION

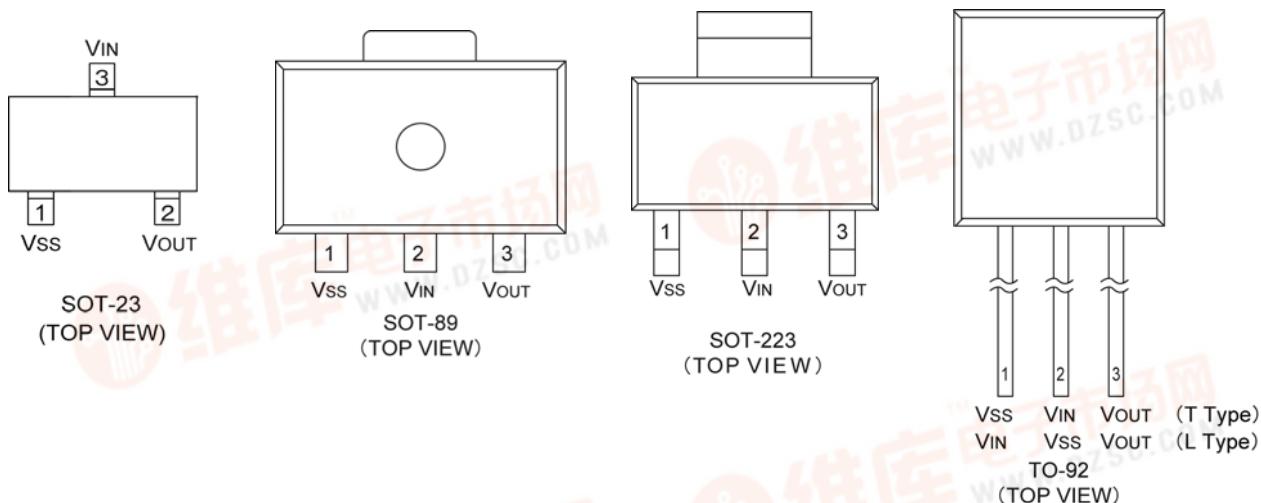

## PIN ASSIGNMENT

PIN NUMBER			PIN NAME	FUNCTION
SOT-23	SOT-89/SOT-223/TO-92 (T)	TO-92(L)		
1	1	2	Vss	Ground
3	2	1	VIN	Power Input
2	3	3	Vout	Output

## PRODUCT CLASSIFICATION


Ordering Information

XC6203


DESIGNATOR	DESCRIPTION	SYMBOL	DESCRIPTION
Type of Regulator	Output Voltage	P	: Current limiter circuit built-in
		E	: No current limiter circuit built-in
	Output Voltage	18~60, A	: e.g. 252:2.5V, Accuracy $\pm 2\%$ 28A:2.85V, Accuracy $\pm 2\%*$ * "A" indicates voltage of 50mV increments
Package	Device Orientation	M	: SOT-23
		P	: SOT-89
		F	: SOT-223
		T	: TO-92 (Standard)
		L	: TO-92 (Custom pin configuration) (Discontinued Product)
		R	: Embossed tape, standard feed
		L	: Embossed tape, reverse feed
		H	: Paper type (TO-92)
		B	: Bag (TO-92)

[查询XC6203供应商](#)

## BLOCK DIAGRAMS

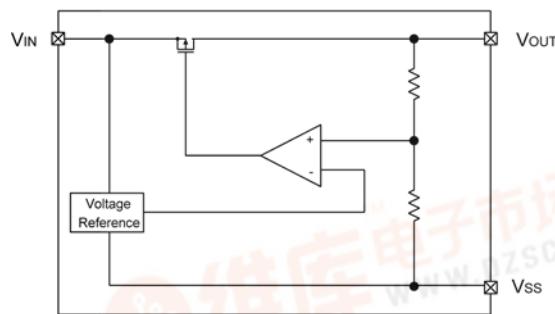

XC6203E

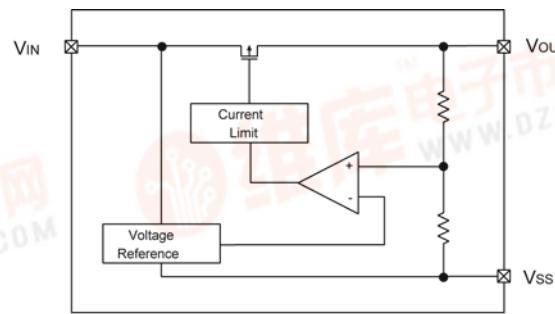

XC6203P

## ABSOLUTE MAXIMUM RATINGS

 $T_a = 25$ 

PARAMETER	SYMBOL	RATINGS	UNITS
Input Voltage	$V_{IN}$	12	V
Output Current	$I_{OUT}$	500	mA
Output Voltage	$V_{OUT}$	$V_{SS}-0.3 \sim V_{IN}+0.3$	V
Power Dissipation	SOT-23	150	mW
	SOT-89	500	
	SOT-223	1,200 (*)	
	TO-92	300	
Operating Temperature Range	$T_{OPR}$	-40 ~ +85	
Storage Temperature Range	$T_{STG}$	-55 ~ +125	

\*: Circuits board mounting: Double-sided board

# XC6203 Series

[查询XC6203供应商](#)

## ELECTRICAL CHARACTERISTICS

XC6203X182 V<sub>OUT(T)</sub> = 1.8V (\*1)

T<sub>a</sub>=25

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage	V <sub>OUT(E)</sub> (*2)	V <sub>IN</sub> =2.8V I <sub>OUT</sub> =40mA	1.764	1.800	1.836	V
Maximum Output Current	I <sub>OUTmax</sub>	V <sub>IN</sub> =2.8V V <sub>OUT</sub> = V <sub>OUT(E)</sub> × 0.90	400	-	-	mA
Load Regulation	V <sub>OUT</sub>	V <sub>IN</sub> =2.8V 1mA I <sub>OUT</sub> 200mA	-	40	100	mV
Dropout Voltage (*3)	V <sub>dif1</sub>	I <sub>OUT</sub> =100mA	-	200	300	mV
	V <sub>dif2</sub>	I <sub>OUT</sub> =200mA	-	400	600	
Supply Current	I <sub>SS</sub>	V <sub>IN</sub> =2.8V	-	8.0	16.0	μA
Line Regulation	V <sub>OUT</sub> V <sub>IN</sub> - V <sub>OUT</sub>	I <sub>OUT</sub> =40mA 2.8V V <sub>IN</sub> 8.0V	-	0.2	0.3	%/V
Input Voltage	V <sub>IN</sub>		-	-	8	V
Output Voltage Temperature Characteristics	V <sub>OUT</sub> Topr - V <sub>OUT</sub>	I <sub>OUT</sub> =40mA -40 Topr 85	-	± 100	-	ppm /
Short-Circuit Current (XC6203P Series Only)	I <sub>lim</sub>	V <sub>IN</sub> =2.8V V <sub>OUT</sub> =0V	-	60	-	mA

NOTE:

\*1: V<sub>OUT(T)</sub> = Specified output voltage.

\*2: V<sub>OUT(E)</sub> = Effective output voltage

(i.e. the output voltage when "V<sub>OUT(T)</sub>+1.0V" is provided at the V<sub>IN</sub> pin while maintaining a certain I<sub>OUT</sub> value).

\*3: V<sub>dif</sub> = V<sub>IN1</sub> - V<sub>OUT1</sub>

\*4: V<sub>OUT1</sub> = A voltage equal to 98% of the output voltage when "V<sub>OUT(T)</sub> + 1.0V" is input.

\*5: V<sub>IN1</sub> = The input voltage when V<sub>OUT1</sub> appears as input voltage is gradually decreased.

XC6203X252 V<sub>OUT(T)</sub> = 2.5V (\*1)

T<sub>a</sub>=25

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage	V <sub>OUT(E)</sub> (*2)	V <sub>IN</sub> =3.5V I <sub>OUT</sub> =40mA	2.450	2.500	2.550	V
Maximum Output Current	I <sub>OUTmax</sub>	V <sub>IN</sub> =3.5V V <sub>OUT</sub> = V <sub>OUT(E)</sub> × 0.93	400	-	-	mA
Load Regulation	V <sub>OUT</sub>	V <sub>IN</sub> =3.5V 1mA I <sub>OUT</sub> 200mA	-	40	100	mV
Dropout Voltage (*3)	V <sub>dif1</sub>	I <sub>OUT</sub> =100mA	-	170	250	mV
	V <sub>dif2</sub>	I <sub>OUT</sub> =200mA	-	320	500	
Supply Current	I <sub>SS</sub>	V <sub>IN</sub> =3.5V	-	8.0	16.0	μA
Line Regulation	V <sub>OUT</sub> V <sub>IN</sub> - V <sub>OUT</sub>	I <sub>OUT</sub> =40mA 3.5V V <sub>IN</sub> 8.0V	-	0.2	0.3	%/V
Input Voltage	V <sub>IN</sub>		-	-	8	V
Output Voltage Temperature Characteristics	V <sub>OUT</sub> Topr - V <sub>OUT</sub>	I <sub>OUT</sub> =40mA -40 Topr 85	-	± 100	-	ppm /
Short-Circuit Current (XC6203P Series Only)	I <sub>lim</sub>	V <sub>IN</sub> =3.5V V <sub>OUT</sub> =0V	-	60	-	mA

NOTE:

\*1: V<sub>OUT(T)</sub> = Specified output voltage.

\*2: V<sub>OUT(E)</sub> = Effective output voltage

(i.e. the output voltage when "V<sub>OUT(T)</sub>+1.0V" is provided at the V<sub>IN</sub> pin while maintaining a certain I<sub>OUT</sub> value).

\*3: V<sub>dif</sub> = V<sub>IN1</sub> - V<sub>OUT1</sub>

\*4: V<sub>OUT1</sub> = A voltage equal to 98% of the output voltage when "V<sub>OUT(T)</sub> + 1.0V" is input.

\*5: V<sub>IN1</sub> = The input voltage when V<sub>OUT1</sub> appears as input voltage is gradually decreased.



[查询XC6203供应商](#)

## ELECTRICAL CHARACTERISTICS (Continued)

XC6203X302 V<sub>OUT(T)</sub> = 3.0V (\*1)

Ta=25

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage	V <sub>OUT(E)</sub> (*2)	V <sub>IN</sub> =4V I <sub>OUT</sub> =40mA	2.940	3.000	3.060	V
Maximum Output Current	I <sub>OUTmax</sub>	V <sub>IN</sub> =4V V <sub>OUT</sub> V <sub>OUT(E)</sub> × 0.96	400	-	-	mA
Load Regulation	V <sub>OUT</sub>	V <sub>IN</sub> =4V 1mA I <sub>OUT</sub> 200mA	-	40	100	mV
Dropout Voltage (*3)	V <sub>dif1</sub>	I <sub>OUT</sub> =100mA	-	150	220	mV
	V <sub>dif2</sub>	I <sub>OUT</sub> =200mA	-	300	420	
Supply Current	I <sub>SS</sub>	V <sub>IN</sub> =4V	-	8.0	16.0	μA
Line Regulation	V <sub>OUT</sub> V <sub>IN</sub> V <sub>OUT</sub>	I <sub>OUT</sub> =40mA 4V V <sub>IN</sub> 8.0V	-	0.2	0.3	%/V
Input Voltage	V <sub>IN</sub>		-	-	8.0	V
Output Voltage Temperature Characteristics	V <sub>OUT</sub> Topr V <sub>OUT</sub>	I <sub>OUT</sub> =40mA -40 Topr 85	-	± 100	-	ppm /
Short-Circuit Current (XC6203P Series Only)	I <sub>lim</sub>	V <sub>IN</sub> =4V V <sub>OUT</sub> =0V	-	60	-	mA

## NOTE:

\*1: V<sub>OUT(T)</sub> = Specified output voltage.\*2: V<sub>OUT(E)</sub> = Effective output voltage(i.e. the output voltage when "V<sub>OUT(T)</sub>+1.0V" is provided at the V<sub>IN</sub> pin while maintaining a certain I<sub>OUT</sub> value).\*3: V<sub>dif</sub> = V<sub>IN1</sub> - V<sub>OUT1</sub>\*4: V<sub>OUT1</sub> = A voltage equal to 98% of the output voltage when "V<sub>OUT(T)</sub> + 1.0V" is input.\*5: V<sub>IN1</sub> = The input voltage when V<sub>OUT1</sub> appears as input voltage is gradually decreased.XC6203X332 V<sub>OUT(T)</sub> = 3.3V (\*1)

Ta=25

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage	V <sub>OUT(E)</sub> (*2)	V <sub>IN</sub> =4.3V I <sub>OUT</sub> =40mA	2.940	3.300	3.366	V
Maximum Output Current	I <sub>OUTmax</sub>	V <sub>IN</sub> =4.3V V <sub>OUT</sub> V <sub>OUT(E)</sub> × 0.96	400	-	-	mA
Load Regulation	V <sub>OUT</sub>	V <sub>IN</sub> =4.3V 1mA I <sub>OUT</sub> 200mA	-	40	100	mV
Dropout Voltage (*3)	V <sub>dif1</sub>	I <sub>OUT</sub> =100mA	-	150	220	mV
	V <sub>dif2</sub>	I <sub>OUT</sub> =200mA	-	300	420	
Supply Current	I <sub>SS</sub>	V <sub>IN</sub> =4.3V	-	8.0	16.0	μA
Line Regulation	V <sub>OUT</sub> V <sub>IN</sub> V <sub>OUT</sub>	I <sub>OUT</sub> =40mA 4.3V V <sub>IN</sub> 8.0V	-	0.2	0.3	%/V
Input Voltage	V <sub>IN</sub>		-	-	8	V
Output Voltage Temperature Characteristics	V <sub>OUT</sub> Topr V <sub>OUT</sub>	I <sub>OUT</sub> =40mA -40 Topr 85	-	± 100	-	ppm /
Short-Circuit Current (XC6203P Series Only)	I <sub>lim</sub>	V <sub>IN</sub> =4.3V V <sub>OUT</sub> =0V	-	60	-	mA

## NOTE:

\*1: V<sub>OUT(T)</sub> = Specified output voltage.\*2: V<sub>OUT(E)</sub> = Effective output voltage(i.e. the output voltage when "V<sub>OUT(T)</sub>+1.0V" is provided at the V<sub>IN</sub> pin while maintaining a certain I<sub>OUT</sub> value).\*3: V<sub>dif</sub> = V<sub>IN1</sub> - V<sub>OUT1</sub>\*4: V<sub>OUT1</sub> = A voltage equal to 98% of the output voltage when "V<sub>OUT(T)</sub> + 1.0V" is input.\*5: V<sub>IN1</sub> = The input voltage when V<sub>OUT1</sub> appears as input voltage is gradually decreased.

# XC6203 Series

[查询XC6203供应商](#)

## ELECTRICAL CHARACTERISTICS (Continued)

XC6203X502 V<sub>OUT(T)</sub> = 5.0V (\*1)

T<sub>a</sub>=25

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage	V <sub>OUT(E)</sub> (*2)	V <sub>IN</sub> =6.0V I <sub>OUT</sub> =40mA	4.900	5.000	5.100	V
Maximum Output Current	I <sub>OUTmax</sub>	V <sub>IN</sub> =6.0V V <sub>OUT</sub> = V <sub>OUT(E)</sub> × 0.96	400	-	-	mA
Load Regulation	V <sub>OUT</sub>	V <sub>IN</sub> =6.0V 1mA I <sub>OUT</sub> 200mA	-	40	100	mV
Dropout Voltage <sup>(*)3</sup>	V <sub>dif1</sub>	I <sub>OUT</sub> =100mA	-	100	180	mV
	V <sub>dif2</sub>	I <sub>OUT</sub> =200mA	-	200	320	
Supply Current	I <sub>SS</sub>	V <sub>IN</sub> =6.0V	-	10.0	20.0	μA
Line Regulation	$\frac{V_{OUT}}{V_{IN} - V_{OUT}}$	I <sub>OUT</sub> =40mA 6.0V V <sub>IN</sub> 8.0V	-	0.2	0.3	%/V
Input Voltage	V <sub>IN</sub>		-	-	8.0	V
Output Voltage Temperature Characteristics	$\frac{V_{OUT}}{T_{opr} - V_{OUT}}$	I <sub>OUT</sub> =40mA -40 T <sub>opr</sub> 85	-	± 100	-	ppm /
Short-Circuit Current (XC6203P Series Only)	I <sub>lim</sub>	V <sub>IN</sub> =6.0V V <sub>OUT</sub> =0V	-	60	-	mA

### NOTE:

\*1: V<sub>OUT(T)</sub> = Specified output voltage.

\*2: V<sub>OUT(E)</sub> = Effective output voltage


(i.e. the output voltage when "V<sub>OUT(T)</sub>+1.0V" is provided at the V<sub>IN</sub> pin while maintaining a certain I<sub>OUT</sub> value).

\*3: V<sub>dif</sub> = V<sub>IN1</sub> - V<sub>OUT1</sub>

\*4: V<sub>OUT1</sub> = A voltage equal to 98% of the output voltage when "V<sub>OUT(T)</sub> + 1.0V" is input.

\*5: V<sub>IN1</sub> = The input voltage when V<sub>OUT1</sub> appears as input voltage is gradually decreased.

## TYPICAL APPLICATION CIRCUIT

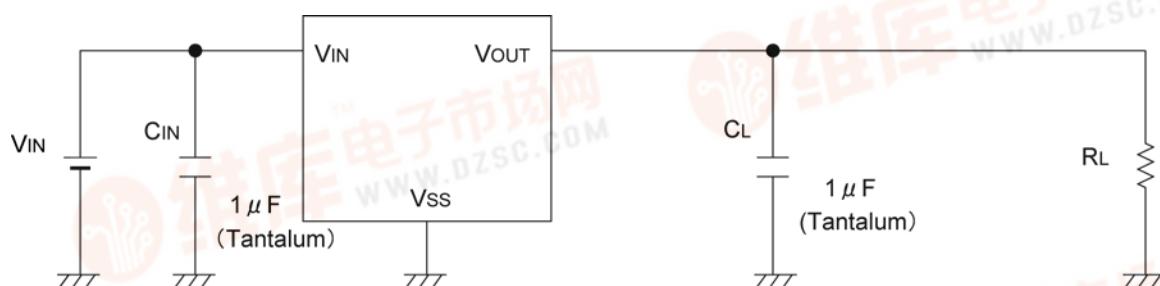


[查询XC6203供应商](#)


## TYPICAL PERFORMANCE CHARACTERISTICS

XC6203E182PR


(1) Output Voltage vs. Output Current

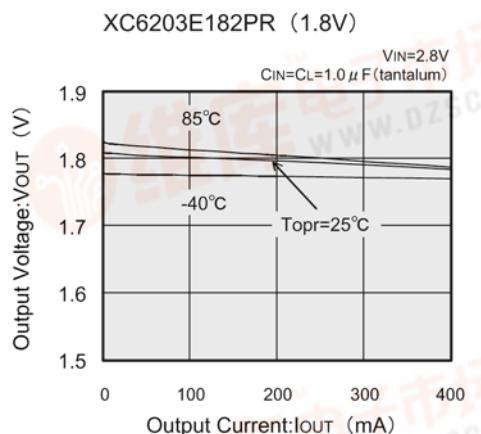


(2) Output Voltage vs. Input Voltage

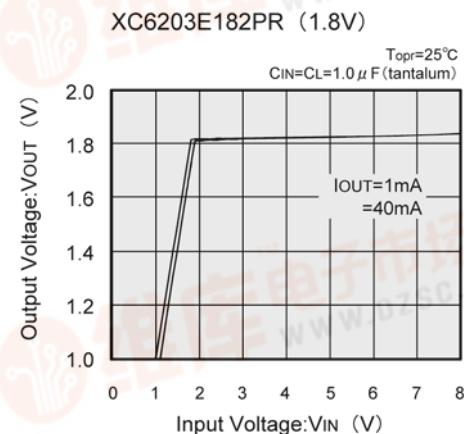


(3) Dropout Voltage vs. Output Current

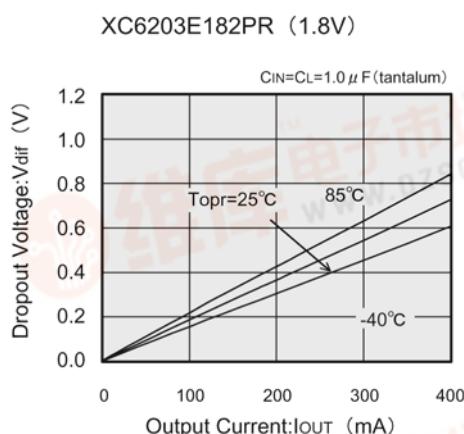


(4) Supply Current vs. Input Voltage

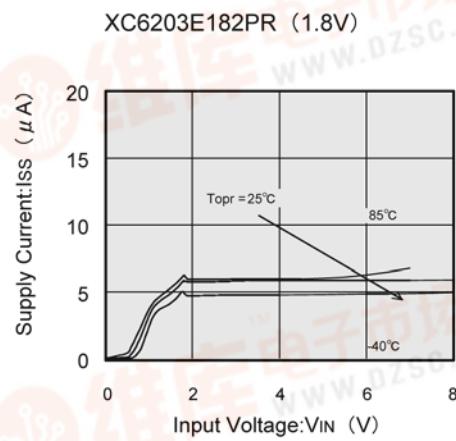

(5) Output Voltage vs. Ambient Temperature

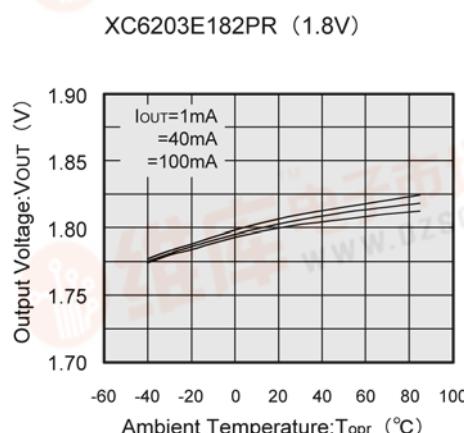


(6) Supply Current vs. Ambient Temperature

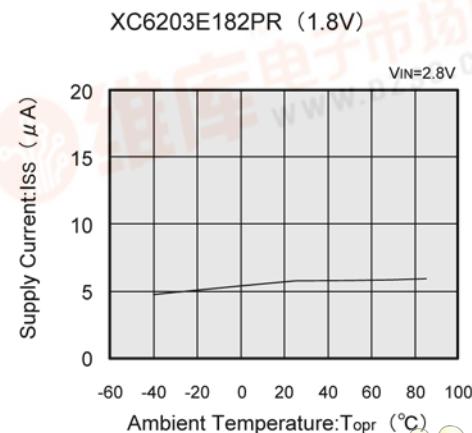


## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

XC6203E182PR (Continued)



### (7) Input Transient Response

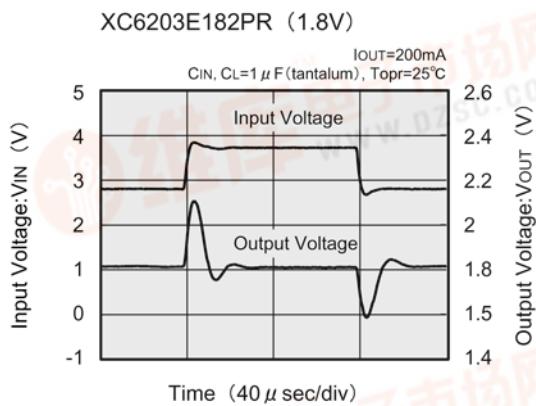

### (8) Load Transient Response

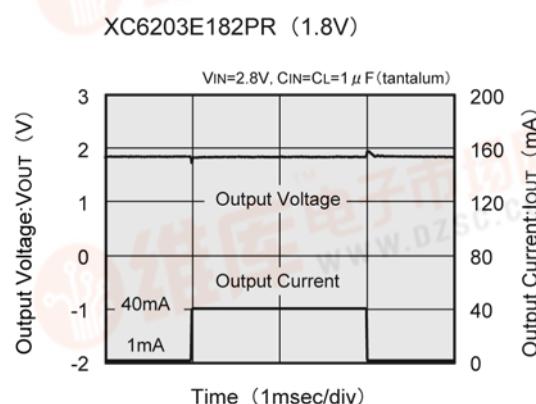

### (9) Ripple Rejection Rate

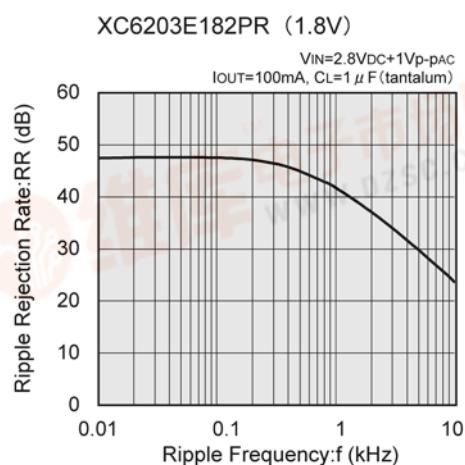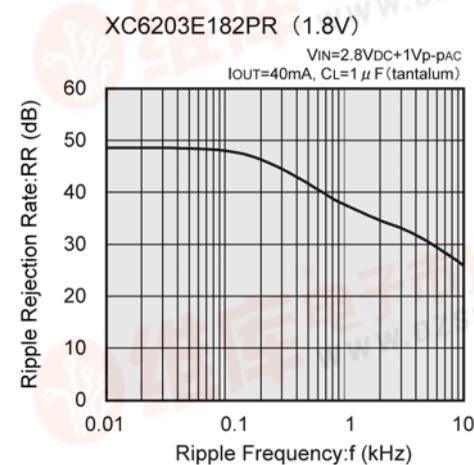


[查询XC6203供应商](#)


## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

XC6203E252PR


(1) Output Voltage vs. Output Current

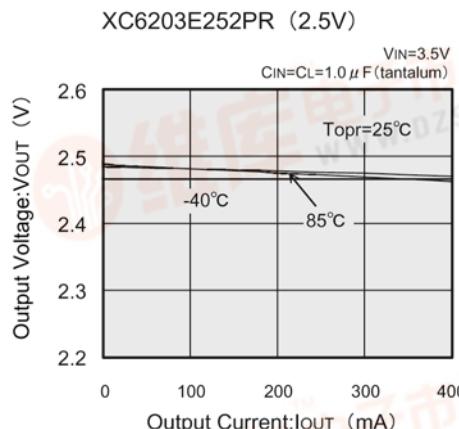


(2) Output Voltage vs. Input Voltage

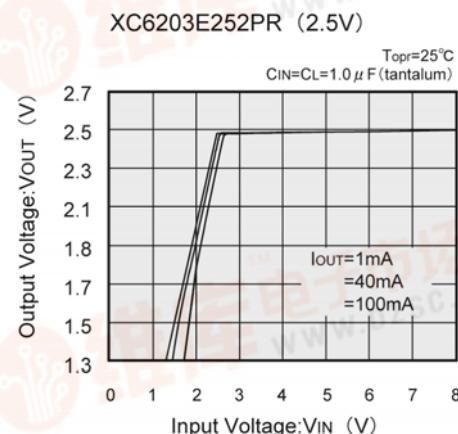


(3) Dropout Voltage vs. Output Current

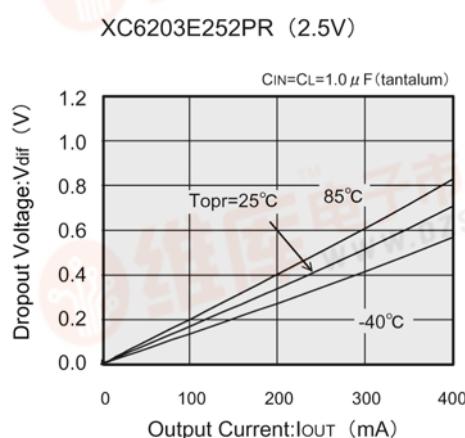


(4) Supply Current vs. Input Voltage

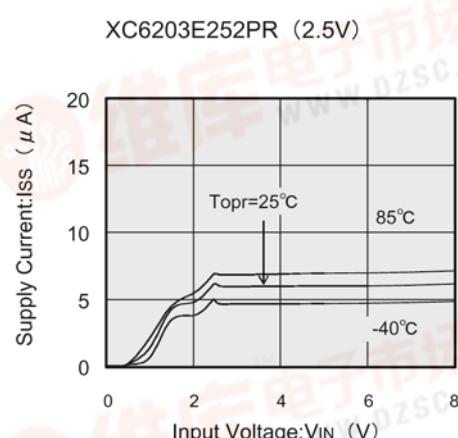

(5) Output Voltage vs. Ambient Temperature

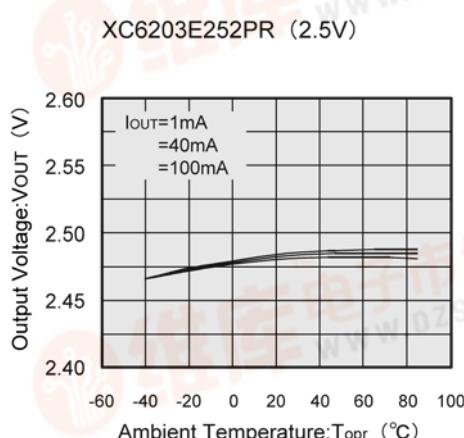

(6) Supply Current vs. Ambient Temperature

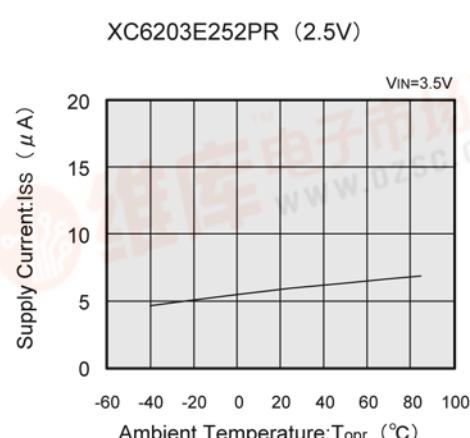



# XC6203 Series

[查询XC6203供应商](#)



## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

XC6203E252PR (Continued)



### (7) Input Transient Response

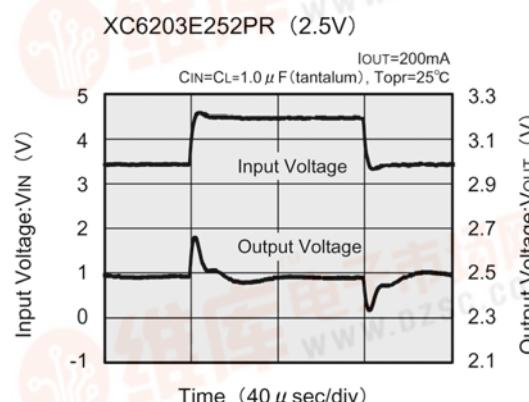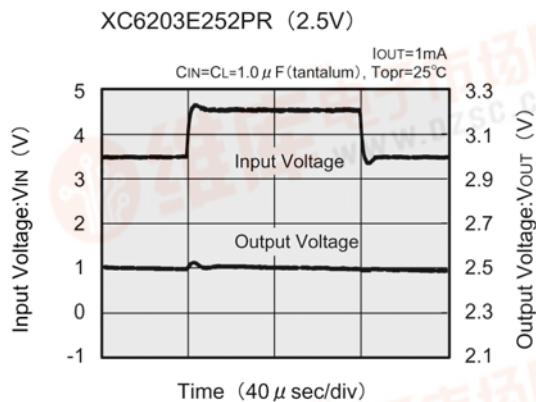

### (8) Load Transient Response

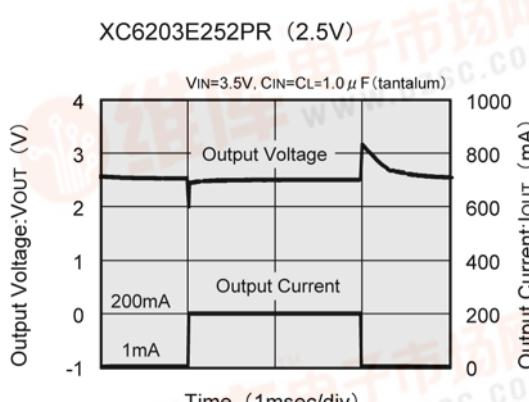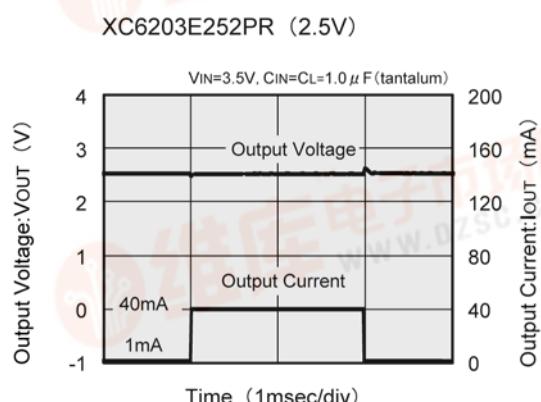

### (9) Ripple Rejection Rate

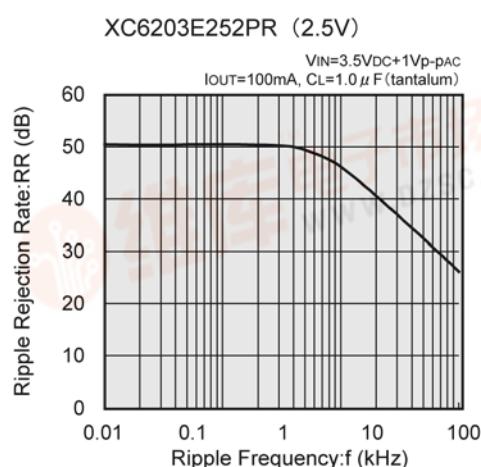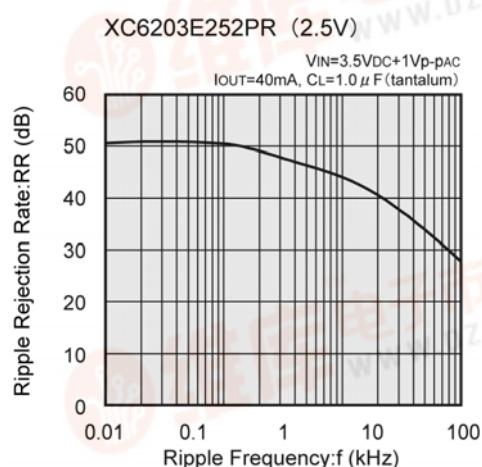


[查询XC6203供应商](#)


## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

XC6203E332PR


(1) Output Voltage vs. Output Current

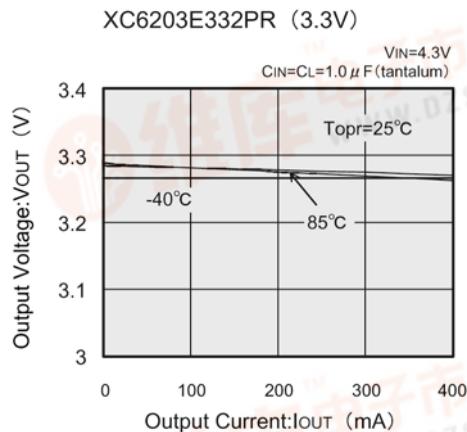


(2) Output Voltage vs. Input Voltage

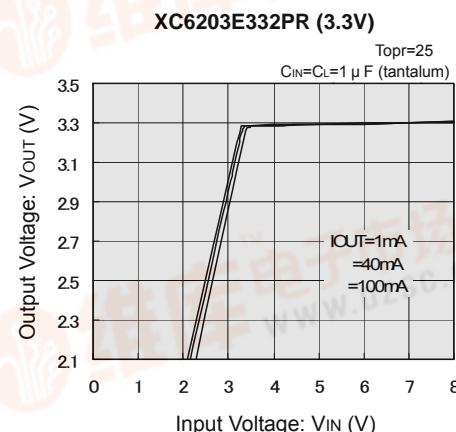


(3) Dropout Voltage vs. Output Current

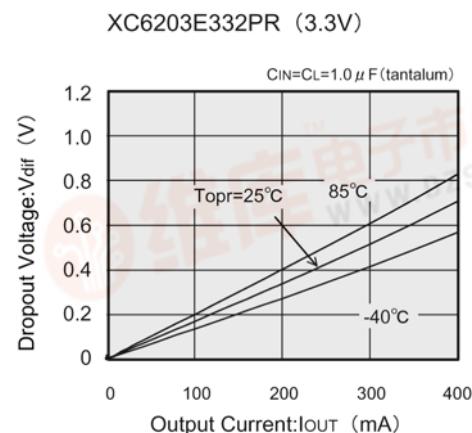


(4) Supply Current vs. Input Voltage

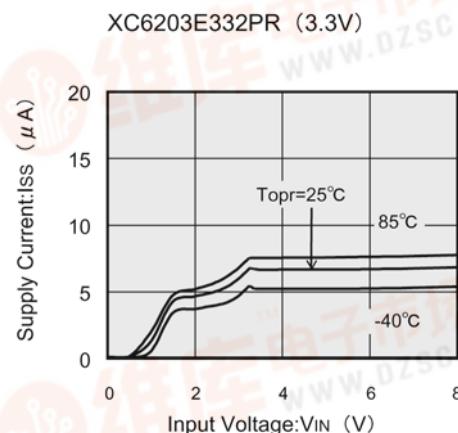

(5) Output Voltage vs. Ambient Temperature

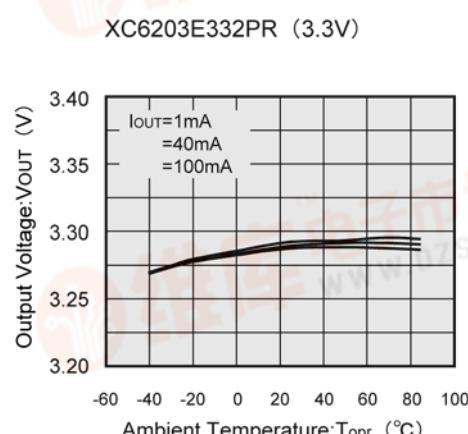

(6) Supply Current vs. Ambient Temperature

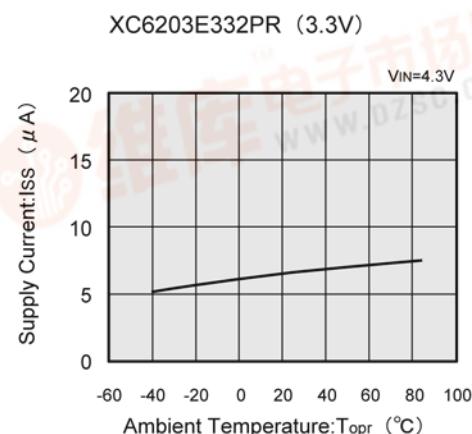



# XC6203 Series

[查询XC6203供应商](#)



## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

XC6203E332PR (Continued)



### (7) Input Transient Response

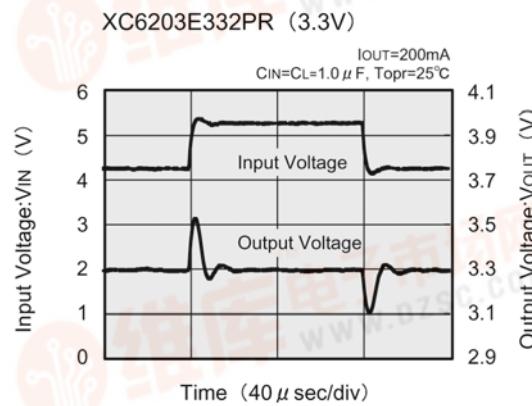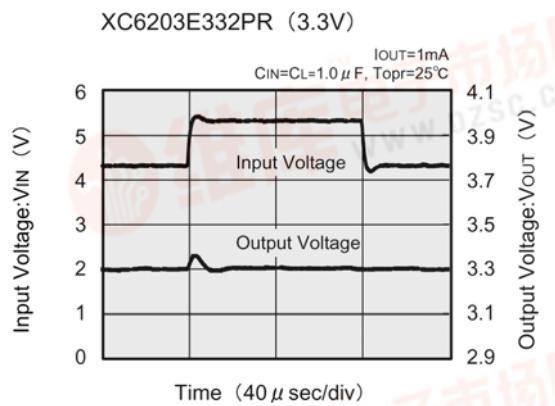

### (8) Load Transient Response

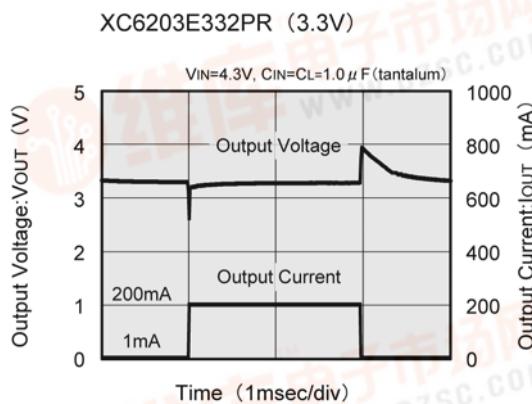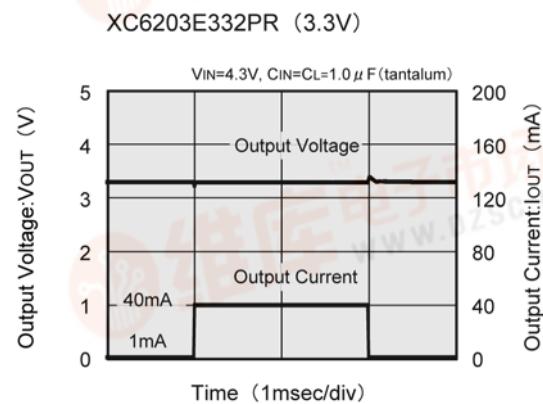

### (9) Ripple Rejection Rate

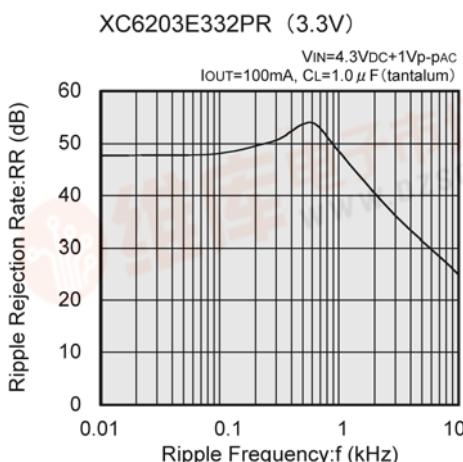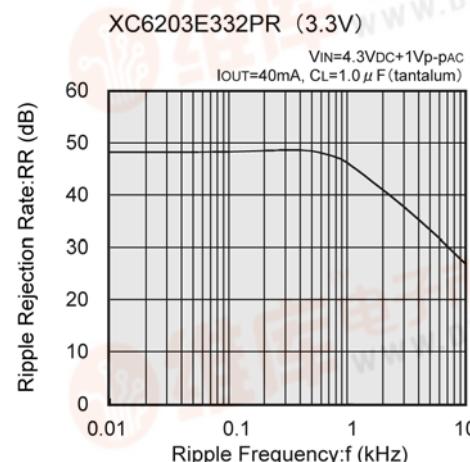


[查询XC6203供应商](#)


## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

XC6203E502PR


(1) Output Voltage vs. Output Current

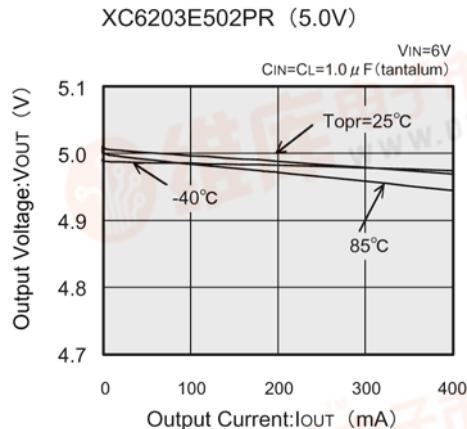


(2) Output Voltage vs. Input Voltage

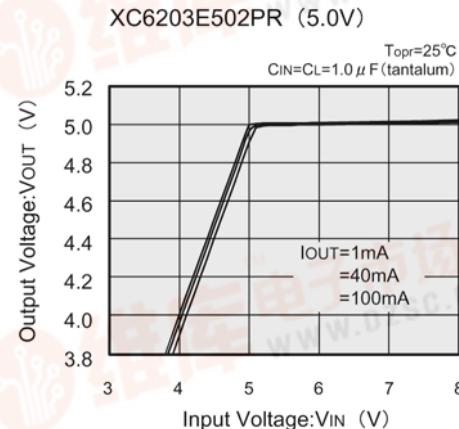


(3) Dropout Voltage vs. Output Current

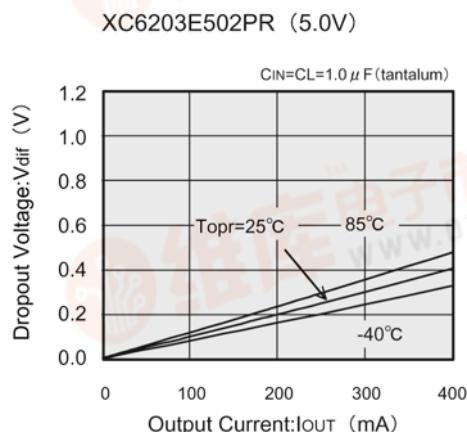


(4) Supply Current vs. Input Voltage

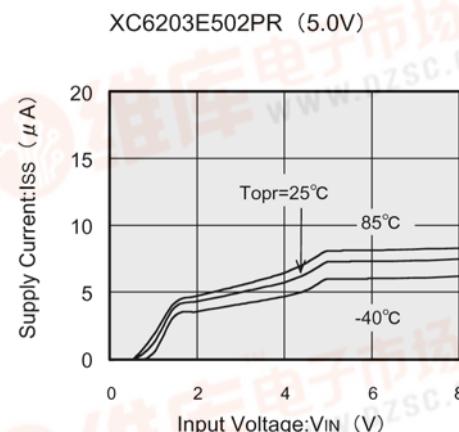

(5) Output Voltage vs. Ambient Temperature

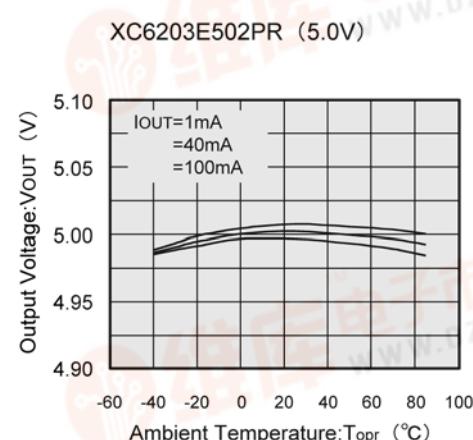

(6) Supply Current vs. Ambient Temperature

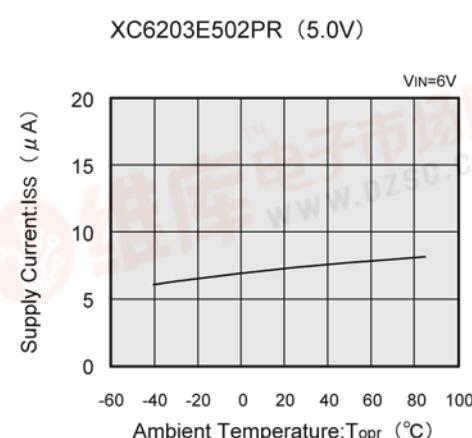



# XC6203 Series

[查询XC6203供应商](#)



## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

XC6203E502PR (Continued)



### (7) Input Transient Response

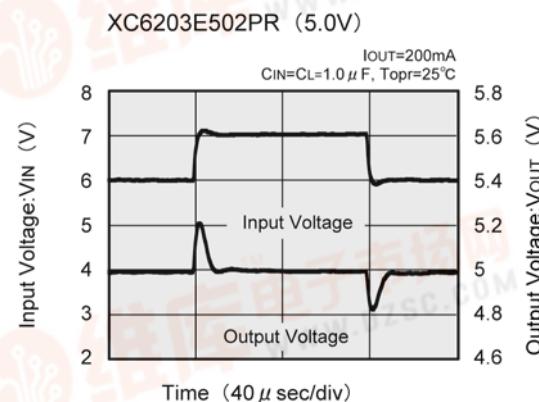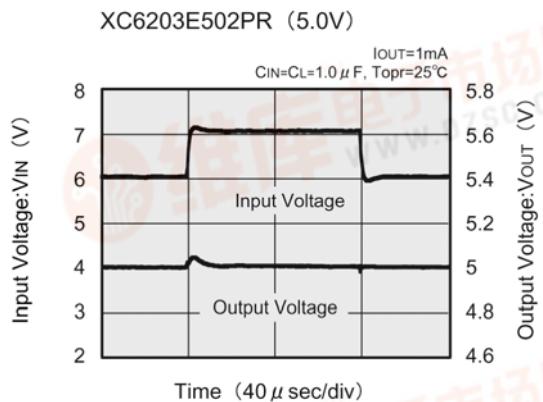

### (8) Load Transient Response

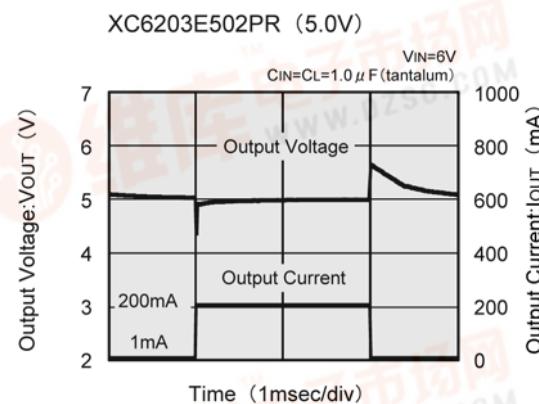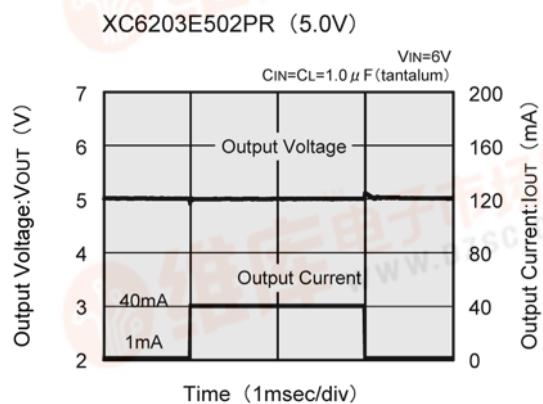

### (9) Ripple Rejection Rate



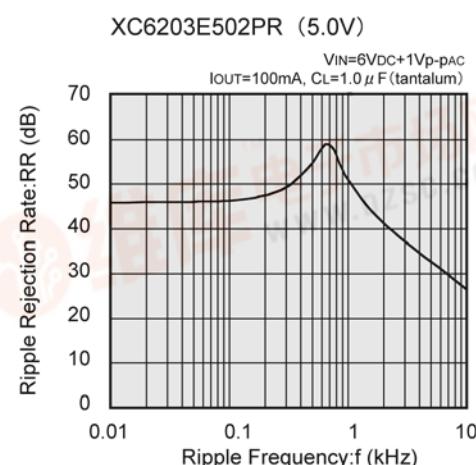
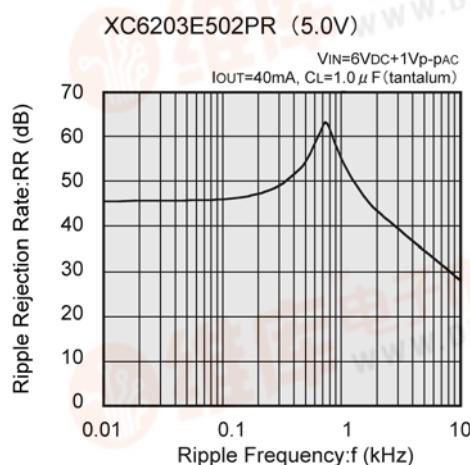


[查询XC6203供应商](#)

## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

XC6203E502PR (Continued)

(10) Output Voltage vs. Output Current

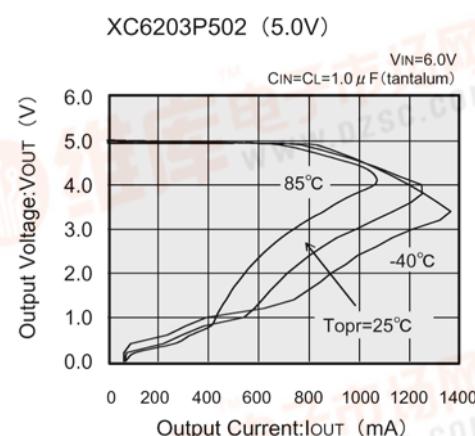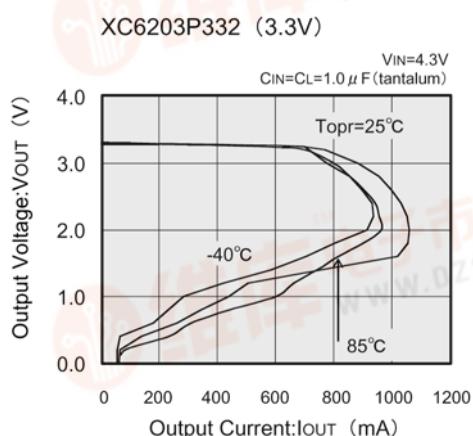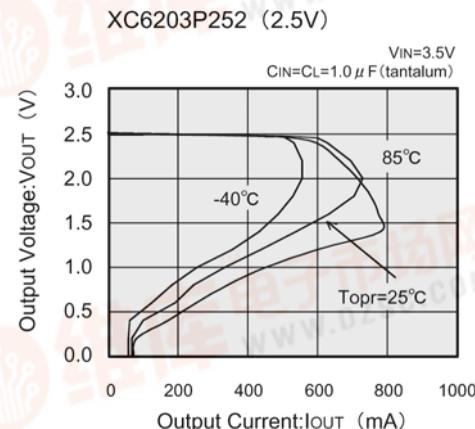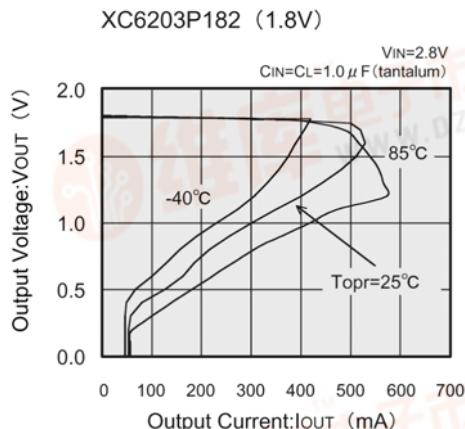


# XC6203 Series


[查询XC6203供应商](#)

## PACKAGING INFORMATION

SOT-89

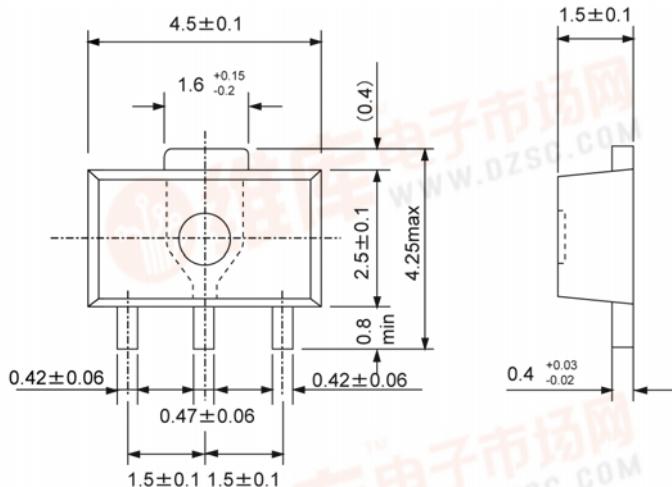


SOT-23

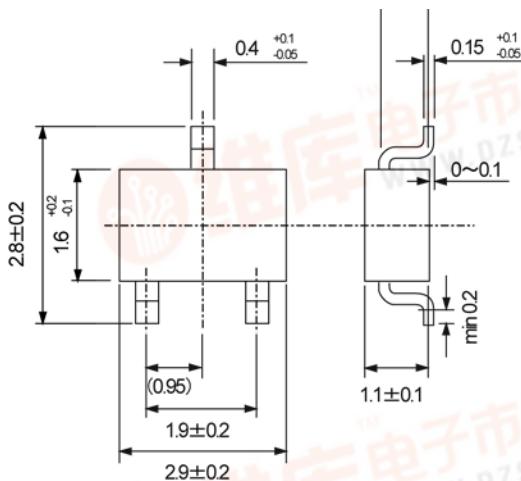



[查询XC6203供应商](#)

## PACKAGING INFORMATION (Continued)

SOT-223

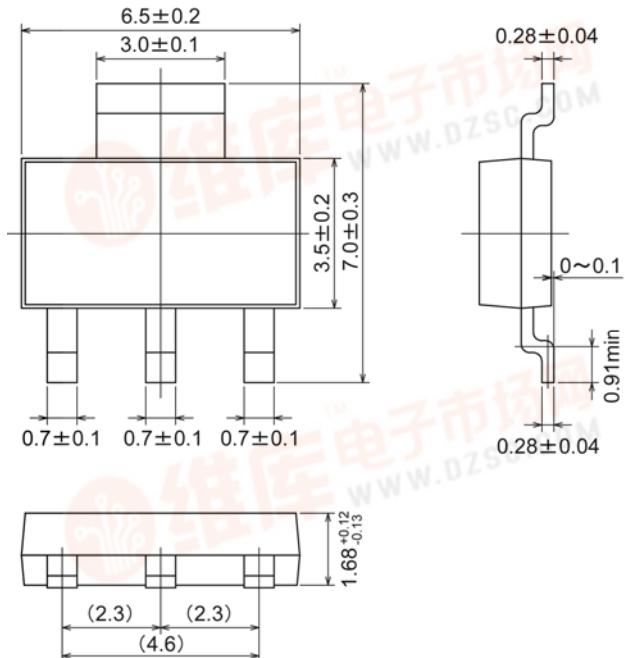

TO-92

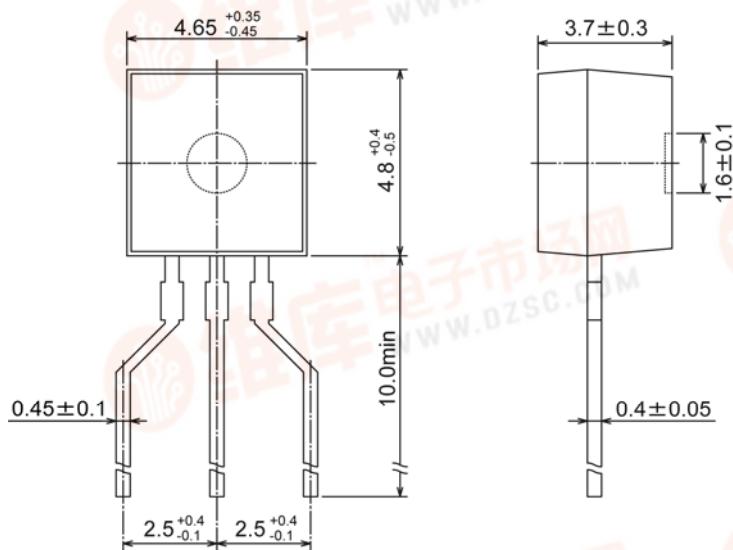


# XC6203 Series

[查询XC6203供应商](#)

## MARKING RULE

SOT-23, SOT-89, SOT-223

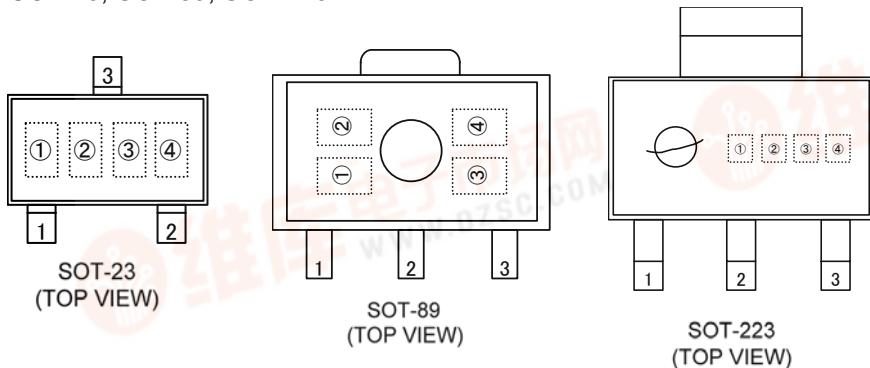

Represents product series

MARK	PRODUCT SERIES
3	XC6203xxxxx

Represents type of regulator

MARK			PRODUCT SERIES
VOLTAGE=0.1 ~ 3.0V	VOLTAGE=3.1 ~ 6.0V	VOLTAGE=2.85V	
5	6	7	XC6203Pxxxxx
2	3	4	XC6203Exxxx

Represents output voltage

MARK	OUTPUT VOLTAGE (V)		MARK	OUTPUT VOLTAGE (V)	
0	-	3.1	-	F	-
1	-	3.2	-	H	-
2	-	3.3	-	K	1.8
3	-	3.4	-	L	1.9
4	-	3.5	-	M	2.0
5	-	3.6	-	N	2.1
6	-	3.7	-	P	2.2
7	-	3.8	-	R	2.3
8	-	3.9	-	S	2.4
9	-	4.0	-	T	2.5
A	-	4.1	-	U	2.6
B	-	4.2	-	V	2.7
C	-	4.3	-	X	2.8
D	-	4.4	-	Y	2.9
E	-	4.5	-	Z	3.0
					5.1
					5.2
					5.3
					5.4
					5.5
					5.6
					5.7
					2.85
					5.9
					6.0



Represents production lot number

0 ~ 9, A to Z or inverted characters of 0 to 9 and A to Z repeated (G, I, J, O, Q, W excepted)

[查询XC6203供应商](#)

## MARKING RULE (Continued)

TO-92

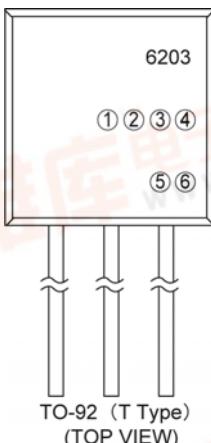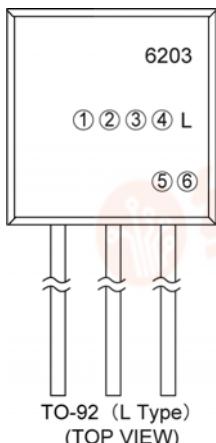

TO-92 (L Type)  
(TOP VIEW)

TO-92 (T Type)  
(TOP VIEW)

Represents type of regulator

MARK	PRODUCT SERIES
P	XC6203Pxxxxx
E	XC6203Exxxxx

Represents output voltage and voltage accuracy

MARK	VOLTAGE (V)	VOLTAGE ACCURACY (%)	PRODUCT SERIES
3	3	2	3.3
5	0	1	5.0
2	8	A	2.85

Represents least significant digit of the production year

MARK	PRODUCTION SERIES
3	2003
4	2004

Represents production lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excepted)

Note: No character inversion used

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet.
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure of malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.  
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges. Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

**TOREX SEMICONDUCTOR LTD.**