



IGBT Ignition Predriver with Dynamic Current Regulation

Description

The CS8312 is a bipolar microprocessor interface IC designed to drive an IGBT (or logic level MOSFETs) powering large inductive loads in harsh operating environments. The IC's dynamic current limit function lets the microprocessor adjust the current limit threshold to the real time needs of the system.

CLI, the current limit input, sets the current limit for the IGBT high or low as directed by the system microprocessor. CLI also raises and lowers the threshold on the diagnostic FLAG output signal. The FLAG output signals the microprocessor when the current level approaches current limit on the IGBT. The CTRL input enables the FLAG function.


Features

- μ P Compatible Inputs
- Adjustable Current Limit Thresholds
- External Sense Resistor
- Flag Signal to Indicate Output Status

Absolute Maximum Ratings


| | |
|---------------------------------------------------------------|------------------------------------------------------------------|
| Supply Voltage..... | -0.3V to +12V |
| Digital Input Currents..... | 2mA |
| Internal Power Dissipation ($T_A = 25^\circ\text{C}$) | 700mW |
| Junction Temperature Range..... | -40°C to $+150^\circ\text{C}$ |
| Storage Temperature Range | -55°C to $+165^\circ\text{C}$ |
| Lead Temperature Soldering | |
| Wave Solder(through hole styles only)..... | 10 sec. max, 260°C peak |
| Reflow (SMD styles only)..... | 60 sec. max above 183°C , 230°C peak |
| Electrostatic Discharge (Human Body Model) | 2kV |

Block Diagram

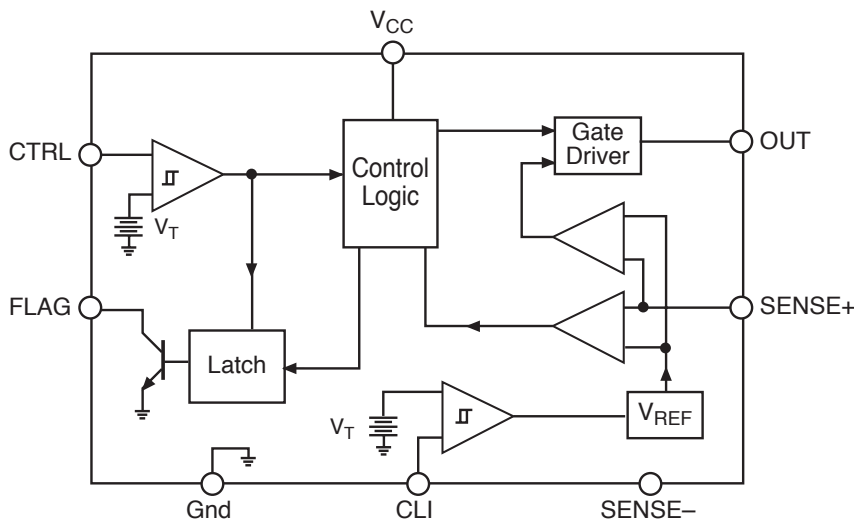

Package Options

8L PDIP & SO Narrow

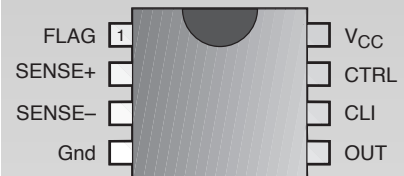

Cherry Semiconductor Corporation
2000 South County Trail, East Greenwich, RI 02818
Tel: (401)885-3600 Fax: (401)885-5786
Email: info@cherry-semi.com
Web Site: www.cherry-semi.com

Electrical Characteristics $7V \leq V_{CC} \leq 10V$; $-40^{\circ}C \leq T_A \leq +125^{\circ}C$; unless otherwise specified

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------------------------------|--------------------------------------------------------------------------------------|--------------|-----|------------|----------|
| ■ General | | | | | |
| Power Supply including Ripple Voltage | | 7 | | 10 | V |
| Supply Ripple Frequency | | 10 | | 60 | kHz |
| Differential Ground Voltage | DC SENSE- to Gnd AC SENSE- to Gnd | -0.1 -0.2 | | 1.0 0.6 | V V |
| Differential Ground Frequency | | 10 | | 60 | kHz |
| Quiescent Current, I_Q | | | | | |
| Turn On | $V_{CTRL}=5.5V$ | | | 15 | mA |
| Turn Off | $V_{CTRL}=-0.3V$ | | | 5 | mA |
| Supply Voltage Rejection | $V_{CTRL}=5.5V$ | 30 | | | dB |
| Differential Ground Rejection Ratio | $V_{CTRL}=5.5V$ | 30 | | | dB |
| Differential Ground Current Ratio | $V_{CTRL}=-0.3V$ ($V_{SENSE-}-V_{Gnd}$)DC=1V ($V_{SENSE-}-V_{Gnd}$)AC=0.6V | | | 3 | mA |
| Unity Gain Bandwidth | $V_{CTRL}=5.5V$ | 400 | | | kHz |
| Clamp Voltage | $V_{CTRL}=5.5V$; $I_{OUT}=1mA$ | | | 5.5 | V |
| Output Off Voltage | $V_{CTRL}=-0.3V$; $I_{OUT}=10\mu A$ $V_{CTRL}=-0.3V$; $I_{OUT}=200\mu A$ | | | 0.5 1.2 | V V |
| Turn On Delay | CTRL increasing | | | 30 | us |
| Turn Off Delay | CTRL decreasing | | | 30 | us |
| ■ Control Function | | | | | |
| Input Voltage Range | $I_{CTRL}=2mA$ | -0.3 | | 5.5 | V |
| Input Threshold | | | | | |
| Turn On | CTRL increasing | | | 3.5 | V |
| Turn Off | CTRL decreasing | 1.5 | | | V |
| Hysteresis | | 0.4 | | 2.0 | V |
| Voltage | $I_{CTRL}=10\mu A$ MAX | | | 1.1 | V |
| Input Capacitance | | | | 50 | pF |
| ■ Current Limit Increase Function | | | | | |
| Input Voltage Range | $I_{CTRL}=2mA$ | -0.3 | | 5.5 | V |
| Input Threshold | | | | | |
| Turn On | CLI increasing | | | 3.5 | V |
| Turn Off | CLI decreasing | 1.5 | | | V |
| Hysteresis | | 0.4 | | 2.0 | V |
| Voltage | $I_{CLI}=10\mu A$ max | | | 1.1 | V |
| Input Capacitance | | | | 50 | pF |
| ■ Output Stage | | | | | |
| I_{OUT} | | | | 5 | mA |
| ■ Flag Function | | | | | |
| Output Low | $V_{CTRL}=5.5V$; $I_{FLAG}=1.5mA$ | | | 0.9 | V |
| Leakage Current | $V_{CTRL}=-0.3V$ | | | 10 | μA |
| Output Capacitance | | | | 50 | pF |
| Turn On ($V_{SENSE+}-V_{SENSE-}$) | $V_{CTRL}=5.5V$; $V_{CLI}=-0.3V$ $V_{CTRL}=5.5V$; $V_{CLI}=5.5V$ | 210 300 | 225 | 240 350 | mV mV |

Electrical Characteristics continued

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------------------------------|--------------------------------|------|-----|-----|---------|
| ■ Flag Function: continued | | | | | |
| Turn Off Delay | CTRL decreasing | | | 10 | us |
| Turn On Delay | | | | 10 | us |
| Disable Time | | 100 | | 450 | us |
| ■ Sense Function | | | | | |
| Input Voltage Range | | -0.3 | | 2.5 | V |
| Sense Regulation Voltage | $V_{CTRL}=5.5V; V_{CLI}=-0.3V$ | 270 | 295 | 320 | mV |
| | $V_{CTRL}=5.5V; V_{CLI}=5.5V$ | 380 | 410 | 440 | mV |
| Input Leakage Current | $V_{CTRL}=5.5V$ | | | 5 | μA |
| Propagation Delay | $V_{CTRL}=5.5V$ | | | 20 | us |

Package Pin Description

| PACKAGE PIN # | PIN SYMBOL | FUNCTION |
|-------------------------|------------|-------------------------------------------------------------------------|
| 8L PDIP & SO | | |
| 1 | FLAG | Indicates whether current through the IGBT has reached a pre-set level. |
| 2 | SENSE+ | Positive input to current comparator. |
| 3 | SENSE- | Ground (SENSE-) for current sense resistor. |
| 4 | Gnd | Ground connection. |
| 5 | OUT | Output voltage to IGBT (MOSFET) gate. |
| 6 | CLI | Current limit input increase. |
| 7 | CTRL | Control input. |
| 8 | V_{CC} | Supply voltage. |

Circuit Description

Flag Function (see Application Diagram)

The flag indicates when the voltage across the two sense pins is approaching a current limit level that has been determined by the value of the external sense resistor (R_{SENSE}) and the state of the CTRL and CLI pins. If the voltage across the sense pins (SENSE+, SENSE-) is less than the flag turn-on voltage, then the FLAG is off. When the voltage between the sense pins equals the FLAG turn on voltage, the FLAG will latch on until the CTRL pin goes low. FLAG is disabled whenever CTRL is low. Changing the CLI pin from low to high will increase nominal FLAG turn on voltage by approximately 45%.

Table 1 FLAG Timing Sequence


| State | CONTROL | SENSE+ | FLAG |
|-------|---------|-----------------|------|
| 0 | Low | X | OFF |
| 1 | High | Below Threshold | OFF |
| 2 | High | Above Threshold | ON |
| 3 | High | X | ON |
| 0 | Low | X | OFF |

Output Stage

The CS8312 output (OUT) saturates and supplies voltage to the IGBT (or MOSFET) gate once the CTRL switches from low to high. As current through the IGBT (MOSFET) increases and the voltage across the sense resistor passes the flag turn on voltage, the FLAG will turn on. If the current through the sense resistor continues to rise and the sense resistor voltage reaches the regulation sense voltage, then the gate voltage will fall to a level that regulates the driver and maintains the regulation sense voltage at the sense resistor.

Current Limit Function

Changing the CLI pin from a logic low to a logic high increases the FLAG turn on voltage by approximately 45% and the regulation sense voltage by approximately 39% respectively.

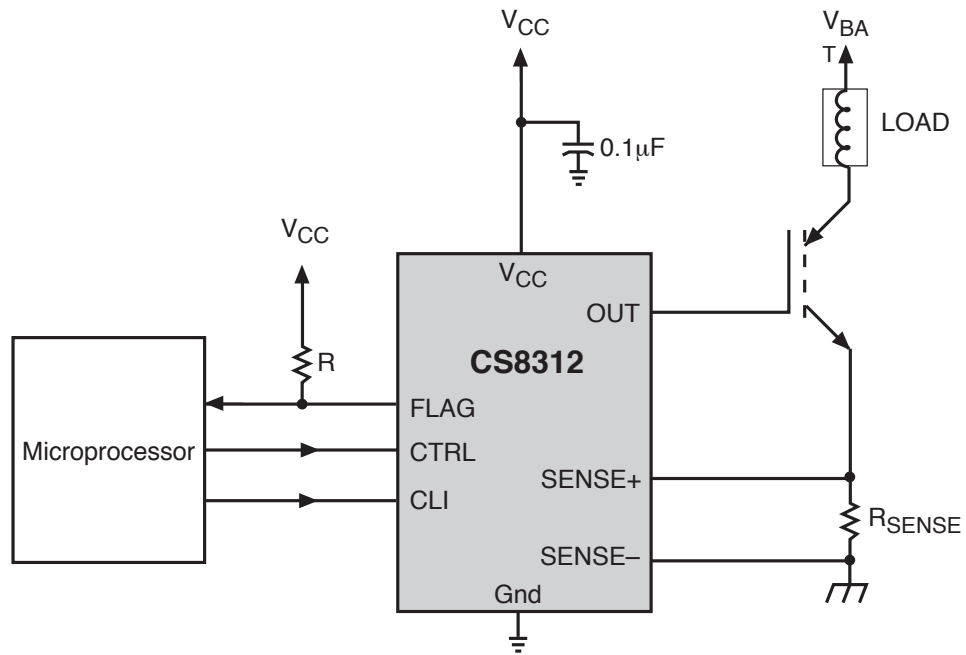[查询"CS8312YN8"供应商](#)

Package Specification

CS8312


PACKAGE DIMENSIONS IN mm (INCHES)

| Lead Count | D | | | |
|------------------|--------|------|---------|------|
| | Metric | | English | |
| | Max | Min | Max | Min |
| 8 Lead SO Narrow | 5.00 | 4.80 | .197 | .189 |
| 8 Lead PDIP | 10.16 | 9.02 | .400 | .355 |


PACKAGE THERMAL DATA

| Thermal Data | | 8L SO | 8L PDIP | |
|-----------------|-----|-------|---------|------|
| $R_{\theta JC}$ | typ | 45 | 52 | °C/W |
| $R_{\theta JA}$ | typ | 165 | 100 | °C/W |

Surface Mount Narrow Body (D); 150 mil wide

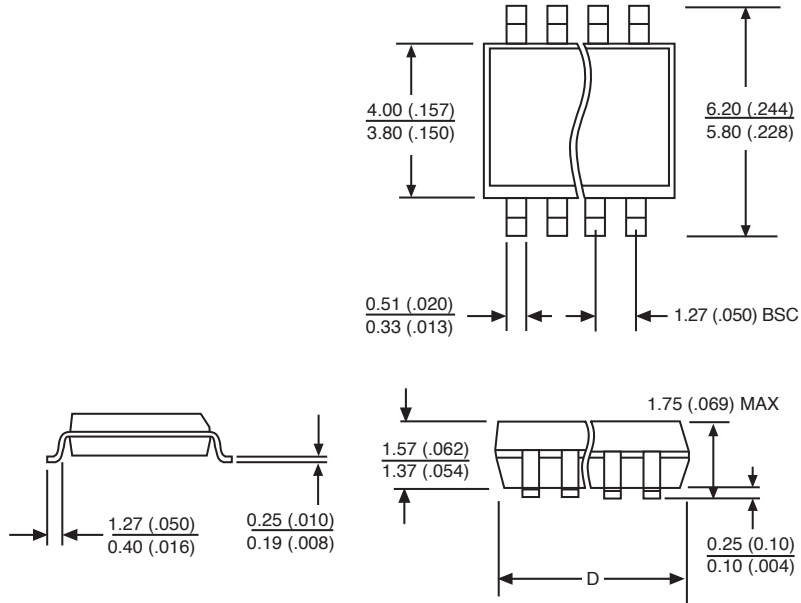

Plastic DIP (N); 300 mil wide

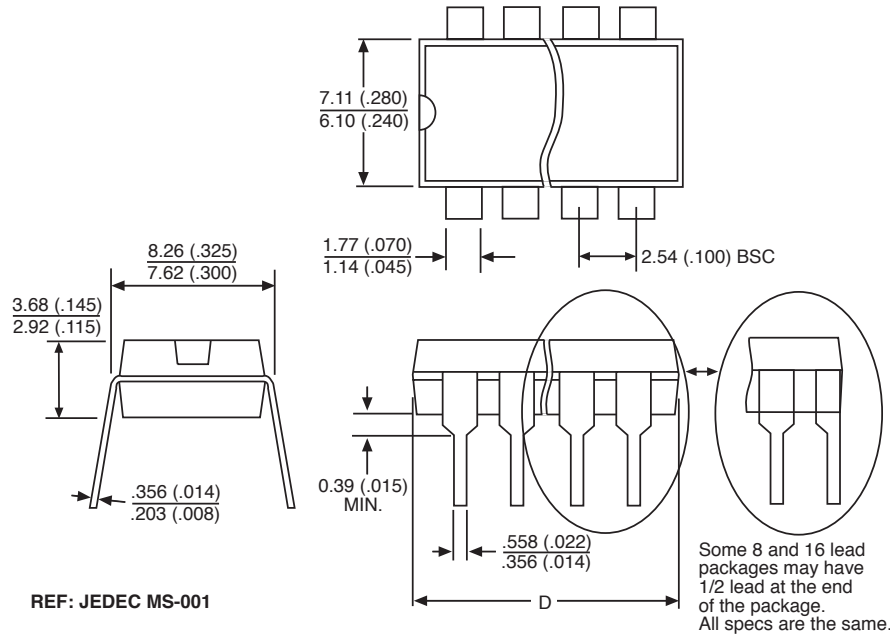

Ordering Information

| Part Number | Description |
|-------------|----------------------------|
| CS8312YN8 | 8L PDIP |
| CS8312YD8 | 8L SO Narrow |
| CS8312YDR8 | 8L SO Narrow (tape & reel) |

Cherry Semiconductor Corporation reserves the right to make changes to the specifications without notice. Please contact Cherry Semiconductor Corporation for the latest available information.