

Fuji Discrete Package IGBT


■ Features

- Square RBSOA
- Low Saturation Voltage
- Less Total Power Dissipation
- Minimized Internal Stray Inductance

■ Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

■ Outline Drawing

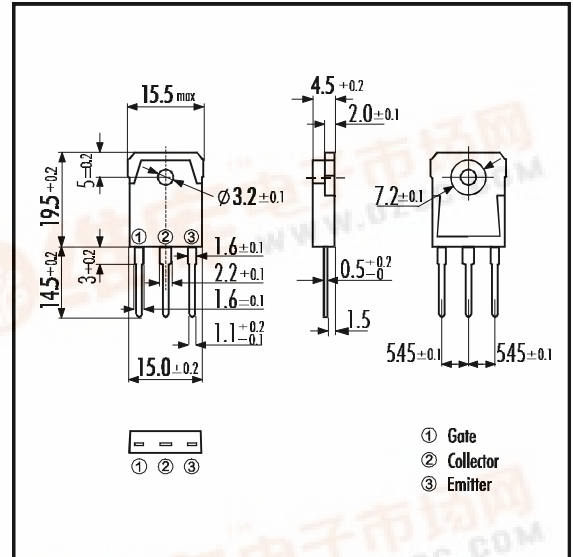


■ Maximum Ratings and Characteristics

• Absolute Maximum Ratings (T_c=25°C)

Items	Symbols	Ratings	Units
Collector-Emitter Voltage	V _{CE}	600	V
Gate -Emitter Voltage	V _{GE}	± 20	V
Collector Current	DC T _c = 25°C	I _C 25	33
	DC T _c =100°C	I _C 100	15
	1ms T _c = 25°C	I _C PULSE	132
IGBT Max. Power Dissipation	P _C	120	W
FWD Max. Power Dissipation	P _C	60	W
Operating Temperature	T _j	+150	°C
Storage Temperature	T _{stg}	-40 ~ +150	°C
Mounting Screw Torque		50	Nm

■ Equivalent Circuit

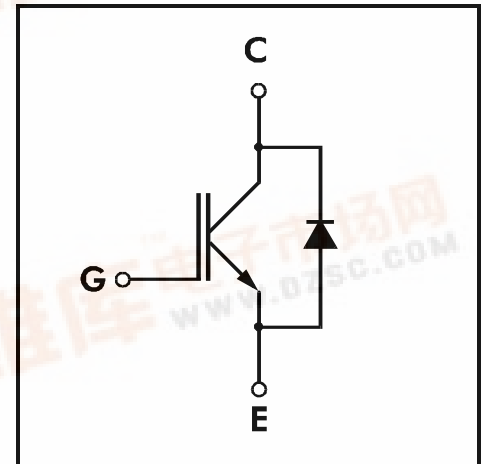


• Electrical Characteristics (at T_j=25°C)

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I _{CES}	V _{GE} =0V V _{CE} =600V			1.0	mA
Gate-Emitter Leakage Current	I _{GES}	V _{CE} =0V V _{GE} =± 20V			20	μA
Gate-Emitter Threshold Voltage	V _{GE(th)}	V _{GE} =20V I _C =15mA	5.5		8.5	V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _{GE} =15V I _C =15A			3.0	V
Input capacitance	C _{ies}	V _{GE} =0V		1000		pF
Output capacitance	C _{oes}	V _{CE} =10V		200		pF
Reverse Transfer capacitance	C _{res}	f=1MHz		40		pF
Switching Time	Turn-on Time	t _{ON}	V _{CC} =300V I _C =15A		1.2	μs
	Turn-off Time	t _r			0.6	
		t _{OFF}	V _{GE} =±15V R _G =160Ω		1.0	
	Turn-on Time	t _f			0.35	
		t _{ON}	V _{CC} =300V I _C =15A		0.16	μs
		t _r			0.11	
		t _{OFF}	V _{GE} =+15V R _G =16Ω		0.30	
		t _f			0.35	
Diode Forward On-Voltage	V _F	I _F =15A V _{GE} =0V			3.0	V
Reverse Recovery Time	t _{rr}	I _F =15A, V _{GE} =-10V, di/dt=100A/μs			300	ns


Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	R _{th(j-c)}	IGBT			1.04	°C/W
	R _{th(j-e)}	Diode			2.08	°C/W


Collector Current vs. Collector-Emitter Voltage

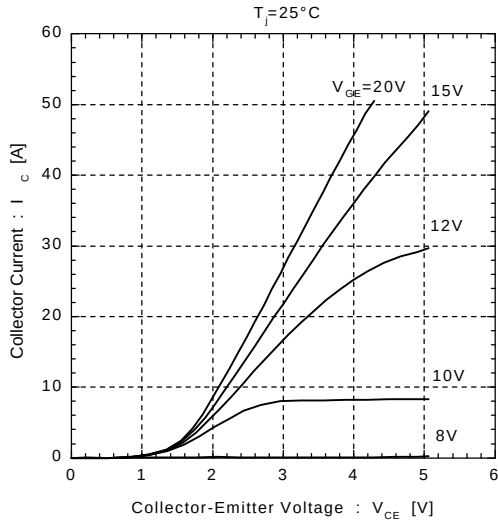


Collector Current vs. Collector-Emitter Voltage

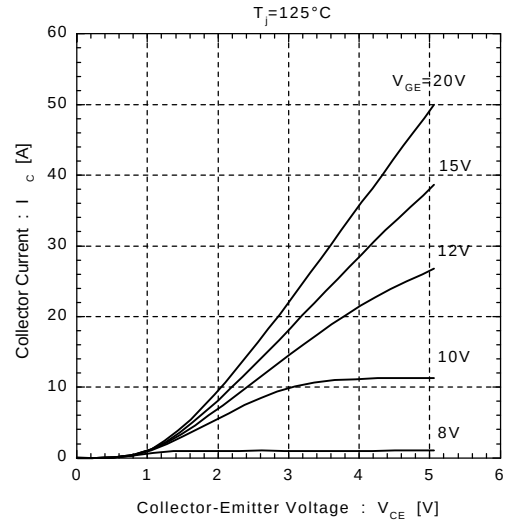


Collector-Emitter Voltage vs. Gate-Emitter Voltage

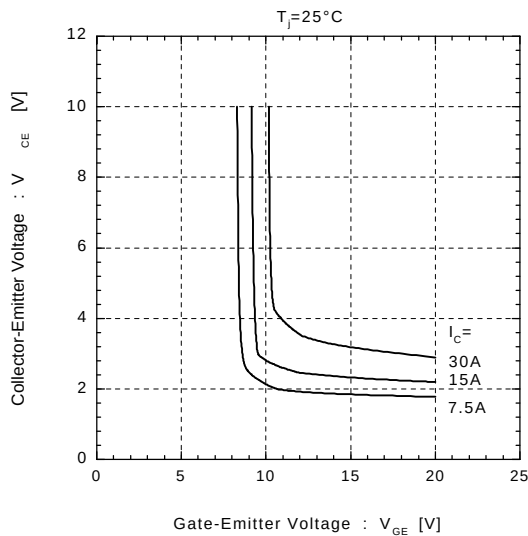


Collector-Emitter Voltage vs. Gate-Emitter Voltage






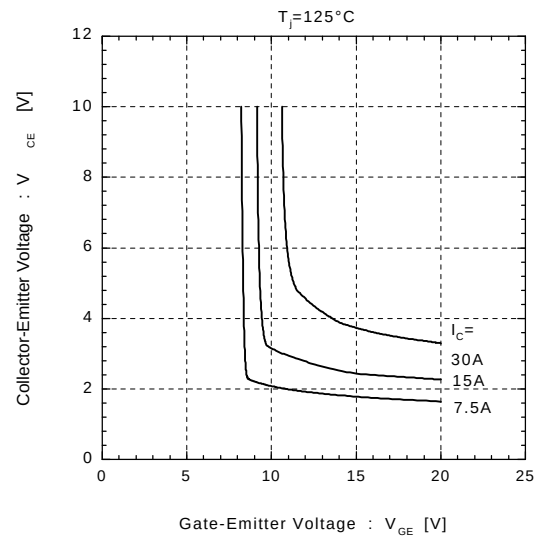







Switching Time vs. Collector Current
 $V_{CC} = 300V, R_G = 16\Omega, V_{GE} = \pm 15V, T_J = 25^\circ\text{C}$

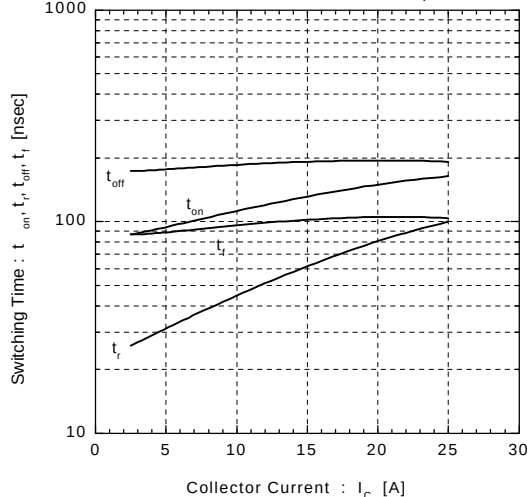


Switching Time vs. Collector Current
 $V_{CC} = 300V, R_G = 16\Omega, V_{GE} = \pm 15V, T_J = 125^\circ\text{C}$

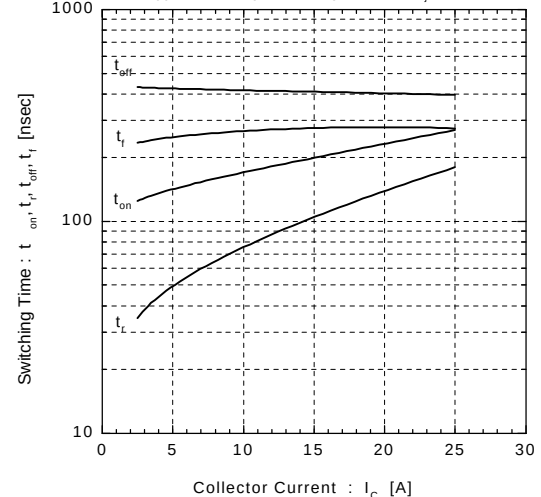

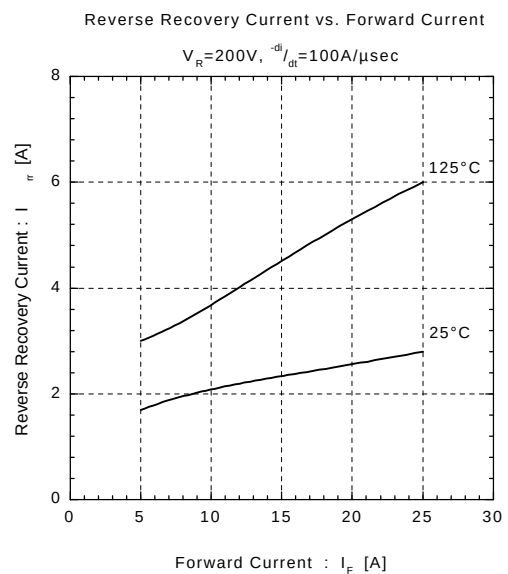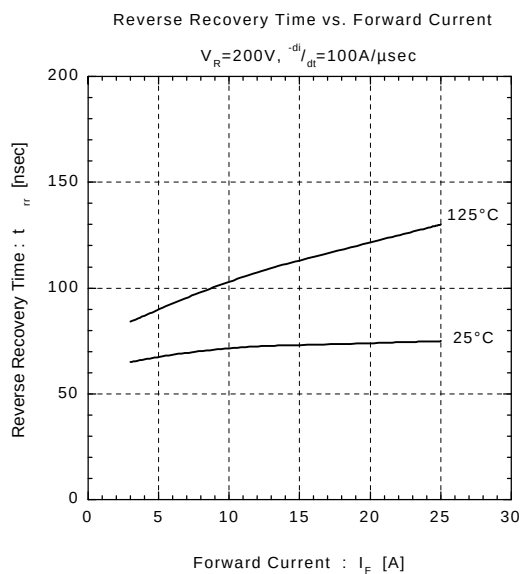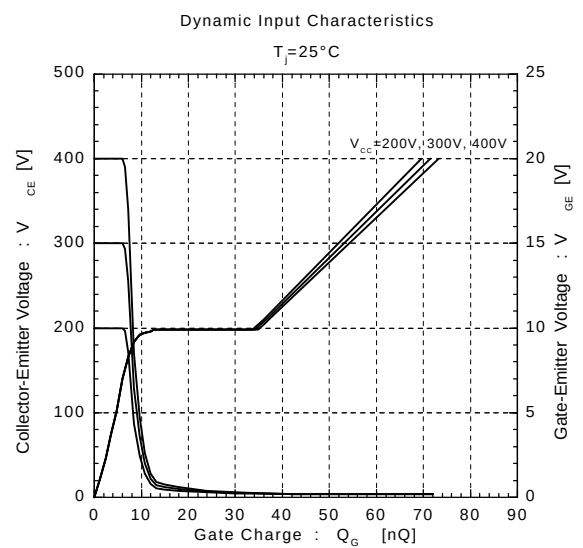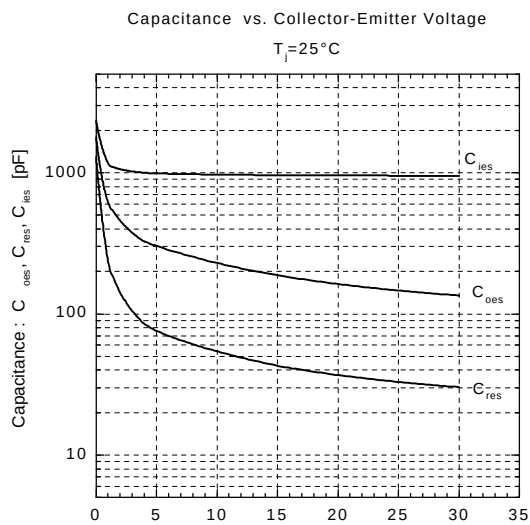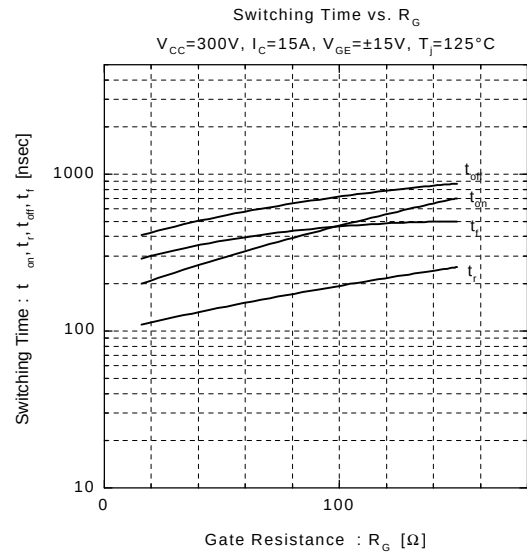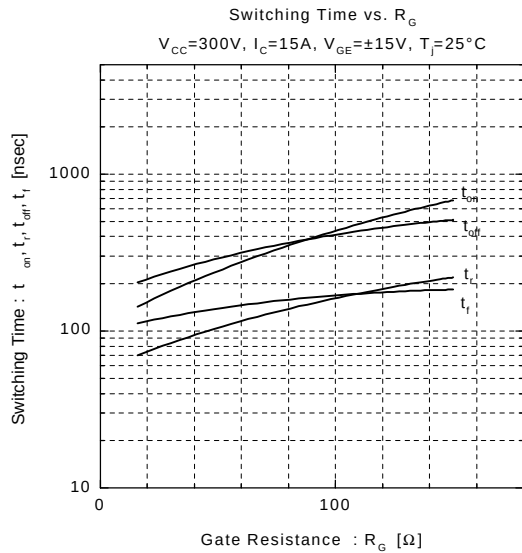


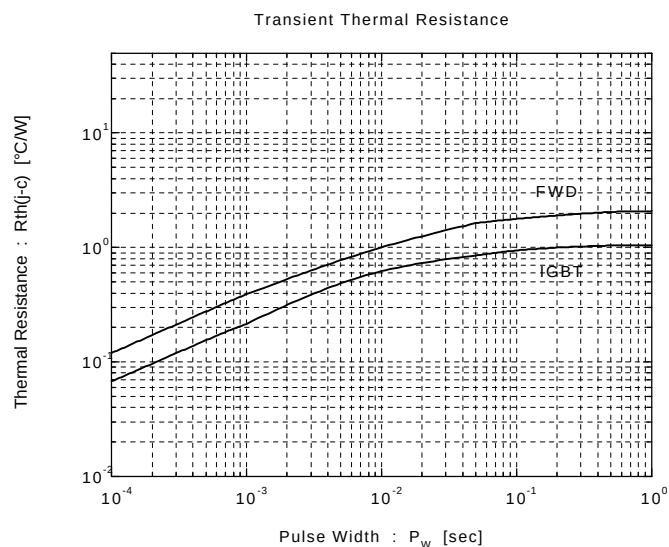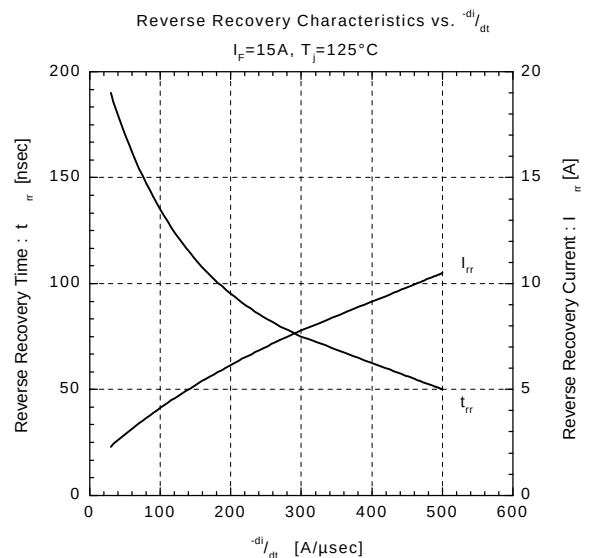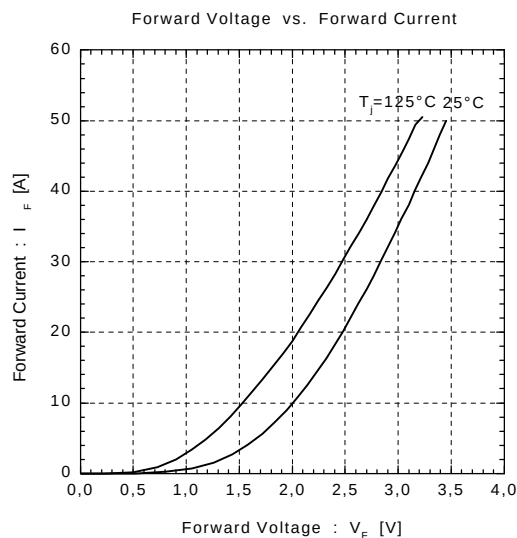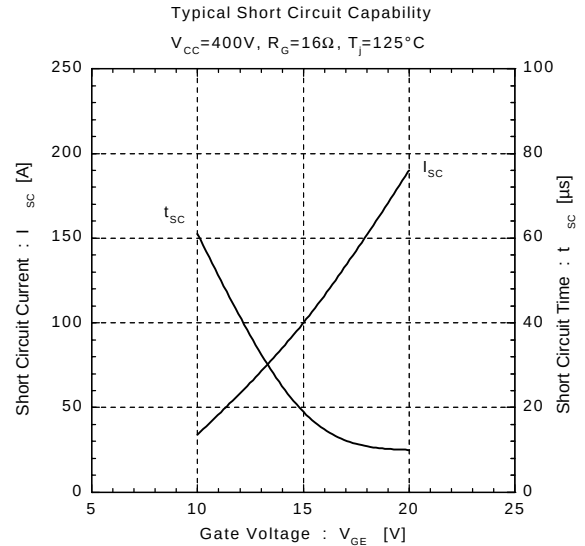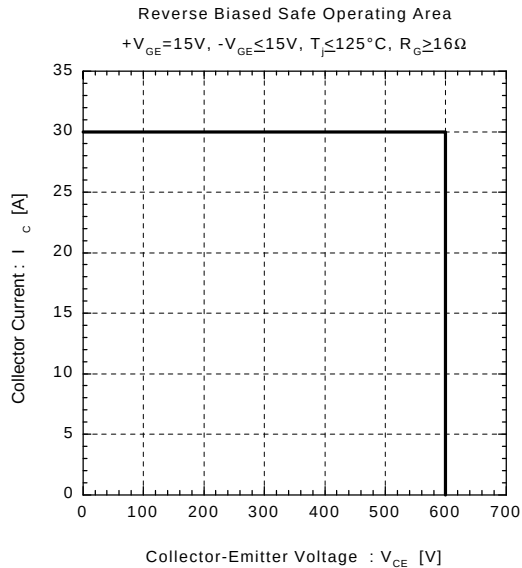

Switching losses (E_{on} , E_{off} vs. I_C)

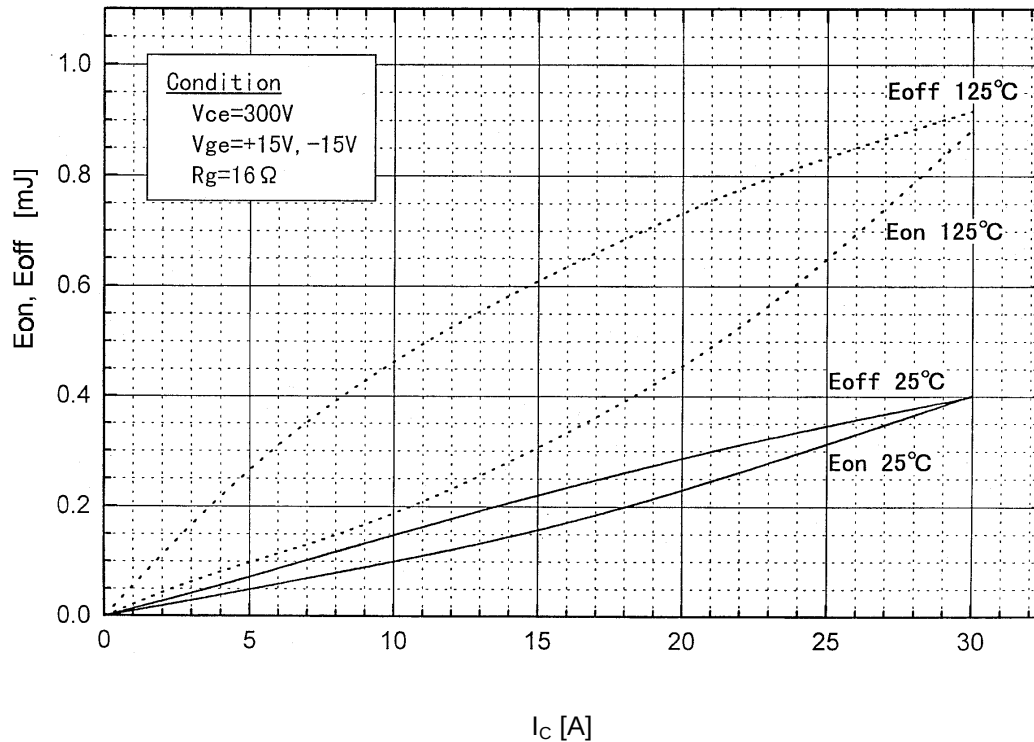

Test Circuit



Switching waveforms

