Ordering number :EN4400A



1SV248

Silicon Epitaxial Type

PIN Diode for VHF, UHF, AGC Applications


Features

- · Very small-sized package facilitates high-density mounting and permits 1SV248-applied equipment to be made smaller.
- · Small interterminal capacitance (C=0.23pF typ).
- · Small forward series resistance (rs= 4.5Ω max).

WWW.DZSG.COM **Package Dimensions**

unit:mm

1197A



Specifications


Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Reverse Voltage	VR		50	V
Forward Current	IF		50	mA
Allowable Power Dissipation	Р	and the later than the	100	mW
Junction Temperature	Tj	A CONTRACTOR OF THE PARTY OF TH	125	°C
Storage Temperature	Tstg	130 74 - 41-	-55 to +125	°C


Electrical Characteristics at Ta = 25°C

Parameter	Symbol	Conditions	Ratings			Unit
Falametel			min	typ	max	Offic
Reverse Voltage	VR	I _R =10µA	50			V
Reverse Current	I _R	V _R =50V			0.1	μA
Forward Voltage	٧ _F	I _F =50mA		0.92		V
Interterminal Capacitance	С	V _R =50V, f=1MHz		0.23		pF
Series Resistance	rs	I _F =10mA, f=100MHz		-11	4.5	Ω
· Marking:FV	•	- 2- 6-5-		07	200	
Electrical Connection						

Electrical Connection





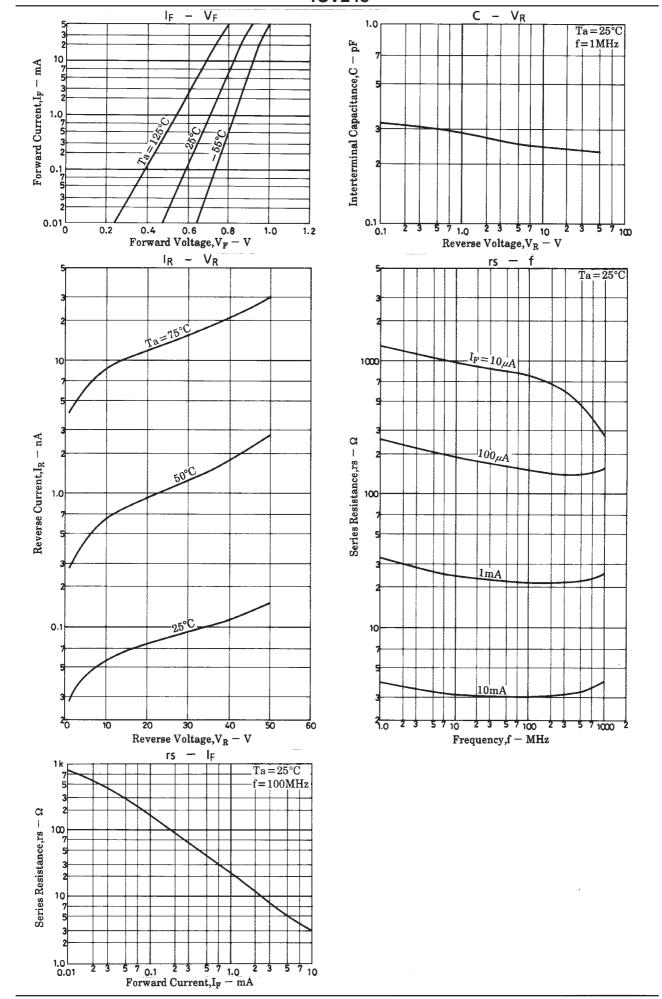

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibilty for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of April, 1998. Specifications and information herein are subject to change without notice.