Ordering number :EN4923



1SV268

Silicon Epitaxial Type

Transmitting, Receiving **Antenna-switch Use PIN Diode**


Features

- · Small interterminal capacitance (C=0.7pF typ).
- · Small forward series resistance (rs= 0.5Ω typ).

Package Dimensions

unit:mm

1163A

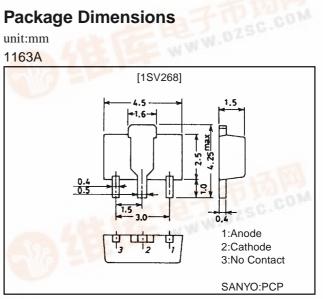

Specifications


Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Reverse Voltage	VR		50	V
Forward Current	I _F		100	mA
Allowable Power Dissipation	Р	Mounted on ceramic board (250mm ² ×0.8mm)	1.0	W
Junction Temperature	Tj	LED THE V	125	°C
Storage Temperature	Tstg	190 74 - 4	-55 to +125	°C

Electrical Characteristics at Ta = 25°C

Parameter	Symbol	Conditions		Ratings		
	Symbol		min	typ	max	Unit
Reverse Voltage	V _R	I _R =10μA	50			V
Reverse Current	IR	V _R =45V			0.5	μΑ
Forward Voltage	V _F	I _F =100mA		0.87	1.0	V
Interterminal Capacitance	С	V _R =40V, f=1MHz		0.7	1.0	pF
Series Resistance	rs	I _F =50mA, f=470MHz		0.5	0.7	Ω
Thermal Resistance	Rthj-a	Mounted on ceramic board 250mm ² ×0.8mm		120	20.	°C/W

· Marking:VD

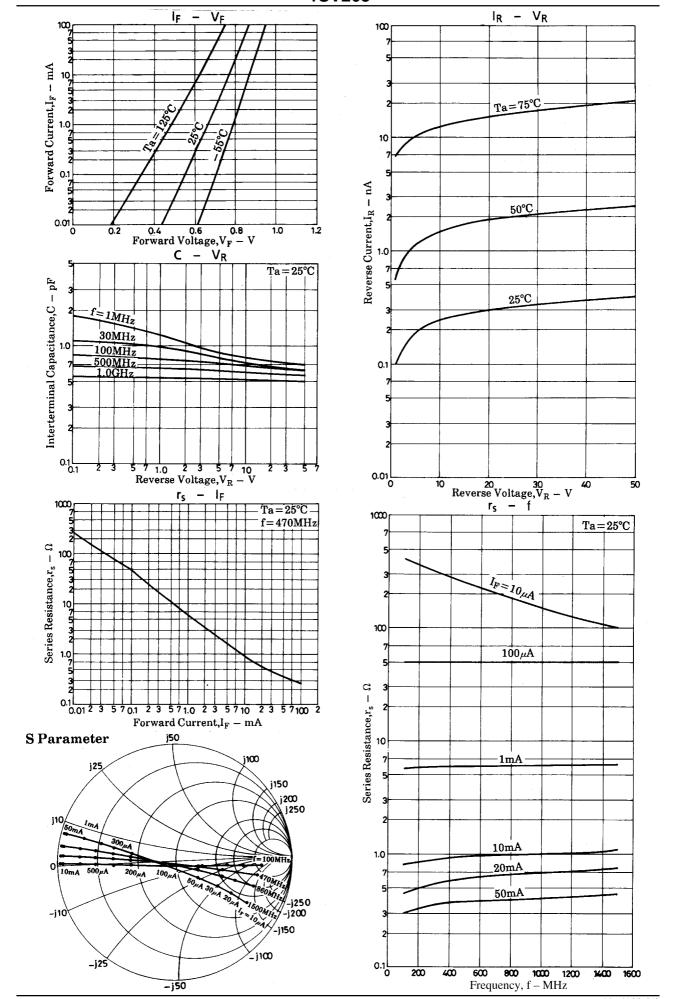

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibilty for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 1998. Specifications and information herein are subject to change without notice.