

SONY

1T403

## Variable Capacitance Diode

### Description

The 1T403 is a variable capacitance diode designed for electronic tuning of VHF TV tuners and CATV tuners using a super-small-miniature flat package (SSVC).

### Features

- Super-small-miniature flat package
- Low series resistance: 0.8 Ω Max. (f=470 MHz)
- Large capacitance ratio: 15.0 Typ. ( $C_1/C_{28}$ )
- Small leakage current: 10 nA Max. ( $V_R=28$  V)
- Capacitance deviation in a matching group:  
within 2 %


### Applications

Electronic tuning of TV and CATV tuners

### Structure

Silicon epitaxial planar type diode

M-290







### Absolute Maximum Ratings (Ta=25 °C)




• Reverse voltage	$V_R$	30	V
• Peak reverse voltage	$V_{RM}$	35	V
		( $RL \geq 10$ kΩ)	
• Operating temperature	$T_{opr}$	-20 to +75	°C
• Storage temperature	$T_{stg}$	-65 to +150	°C

### Electrical Characteristics

(Ta=25 °C)



Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse current	$I_R$	$V_R=28$ V			10	nA
Diode capacitance	$C_1$	$V_R=1$ V, f=1 MHz	34.61		42.31	pF
	$C_{28}$	$V_R=28$ V, f=1 MHz	2.321		2.714	pF
Capacitance ratio	$C_1/C_{28}$		13.5	15.0		
Series resistance	$r_s$	$C_D=14$ pF, f=470 MHz		0.75	0.80	Ω
Capacitance deviation in a matching group	$\Delta C$	$V_R=1$ to 28 V, f=1 MHz			2	%

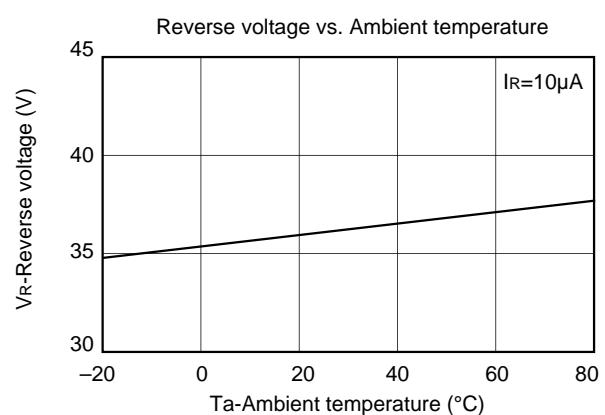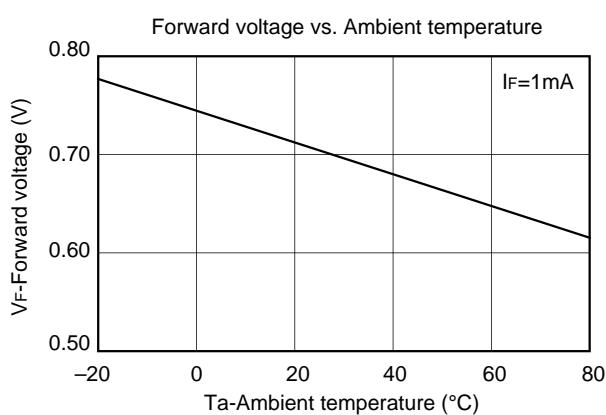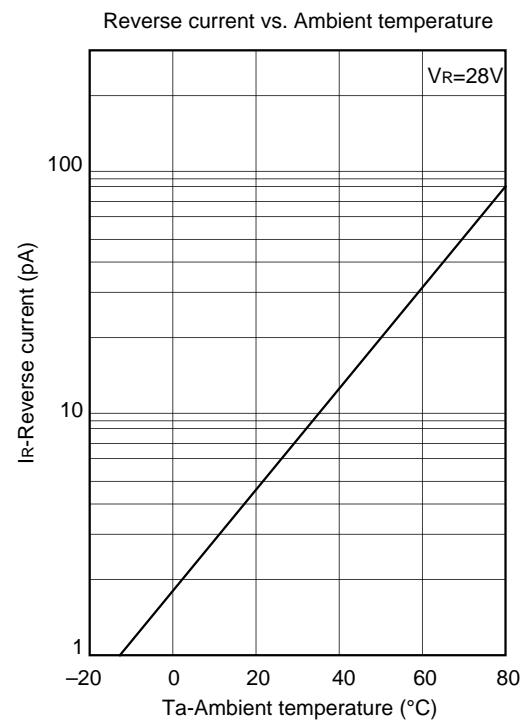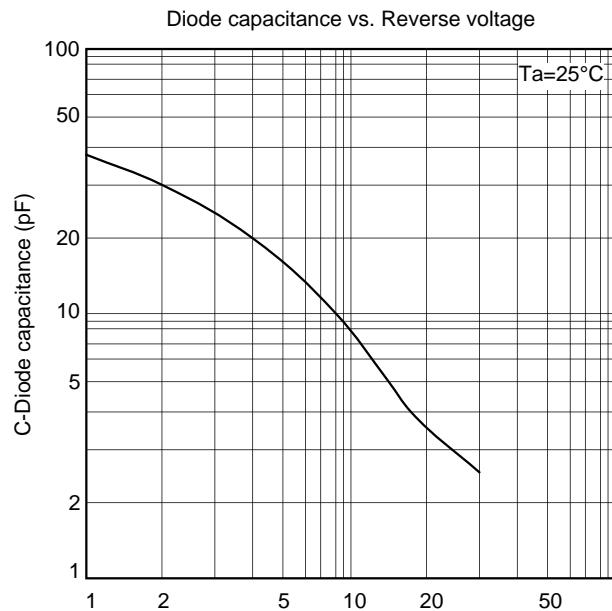

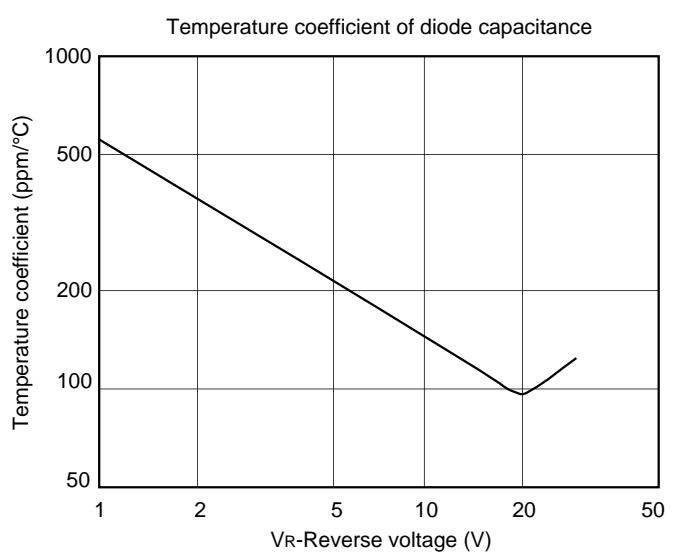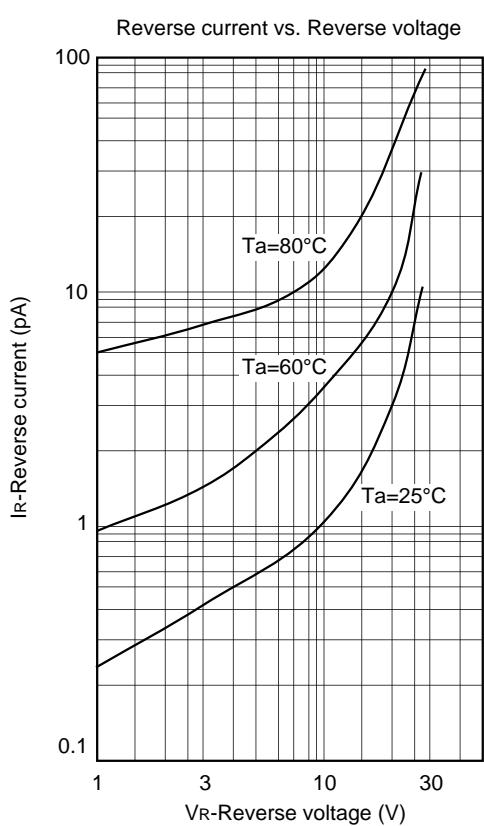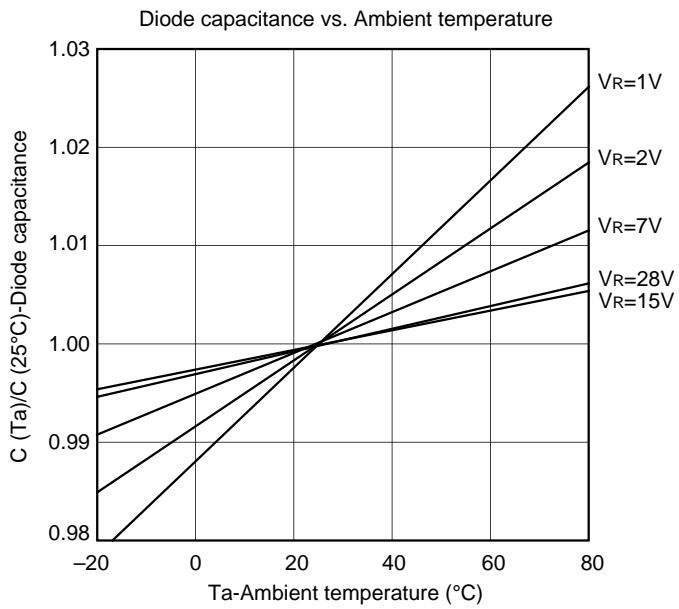

## Package Outline Unit : mm

M-290

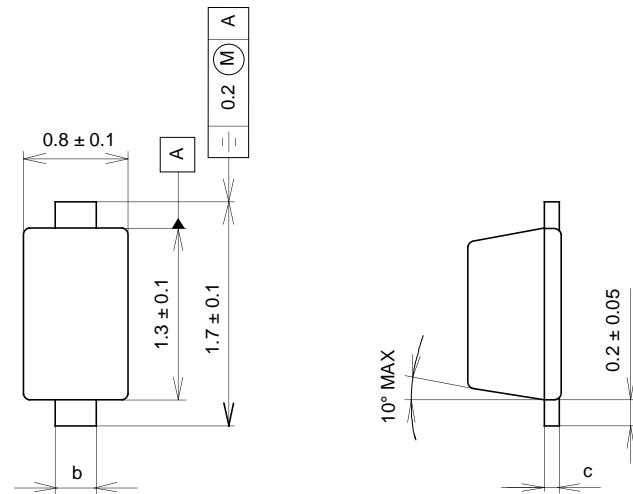


	BASE METAL	WITH PLATING
c	0.11 ± 0.005	0.11 + 0.05 - 0.01
b	0.3 ± 0.025	0.3 + 0.05 - 0.02

SONY CODE	M-290
EIAJ CODE	_____
JEDEC CODE	_____

PACKAGE MATERIAL	EPOXY RESIN
LEAD TREATMENT	SOLDER PLATING
LEAD MATERIAL	COPPER
PACKAGE WEIGHT	0.002g

## Mark

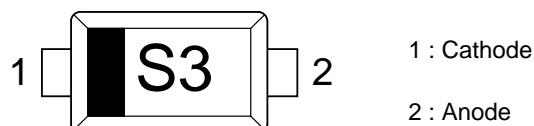

1 : Cathode

2 : Anode