

SONY

1T404

Variable Capacitance Diode


Description

The 1T404 is a variable capacitance diode designed for electronic tuning of wide-band CATV tuners using a super-small-miniature flat package (SSVC).

Features

- Super-small-miniature flat package
- Low series resistance: 0.75 Ω Max. (f=470 MHz)
- Large capacitance ratio: 11.5 Typ. (C_2/C_{25})
- Small leakage current: 10 nA Max. ($V_R=28$ V)
- Capacitance deviation in a matching group:
within 2 %

M-290



Applications

Electronic tuning of wide-band CATV tuners

Structure

Silicon epitaxial planar type diode





Absolute Maximum Ratings (Ta=25 °C)




- | | | | |
|-------------------------|-----------|-------------|----|
| • Reverse voltage | V_R | 34 | V |
| • Operating temperature | T_{opr} | -20 to +75 | °C |
| • Storage temperature | T_{stg} | -65 to +150 | °C |

Electrical Characteristics

(Ta=25 °C)



Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse current	I_R	$V_R=28$ V			10	nA
Diode capacitance	C_2	$V_R=2$ V, f=1 MHz	29.36		34.26	pF
	C_{25}	$V_R=25$ V, f=1 MHz	2.49		2.89	pF
Capacitance ratio	C_2/C_{25}		11.0	11.5		
Series resistance	r_s	$C_D=14$ pF, f=470 MHz			0.75	Ω
Capacitance deviation in a matching group	ΔC	$V_R=2$ to 25 V, f=1 MHz			2	%

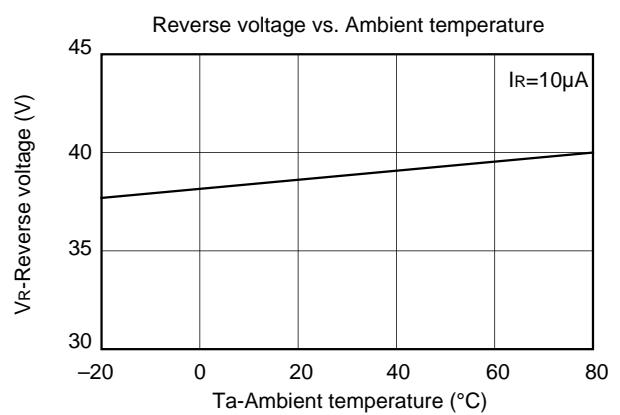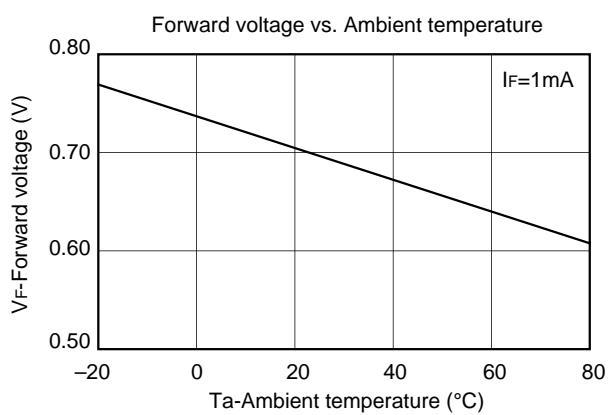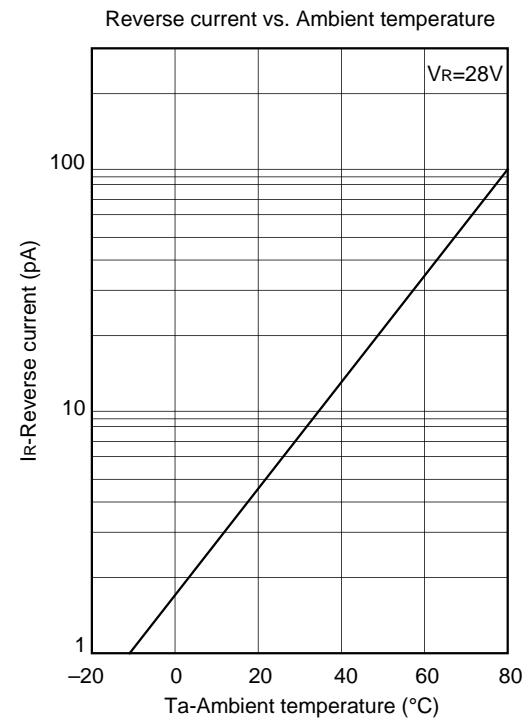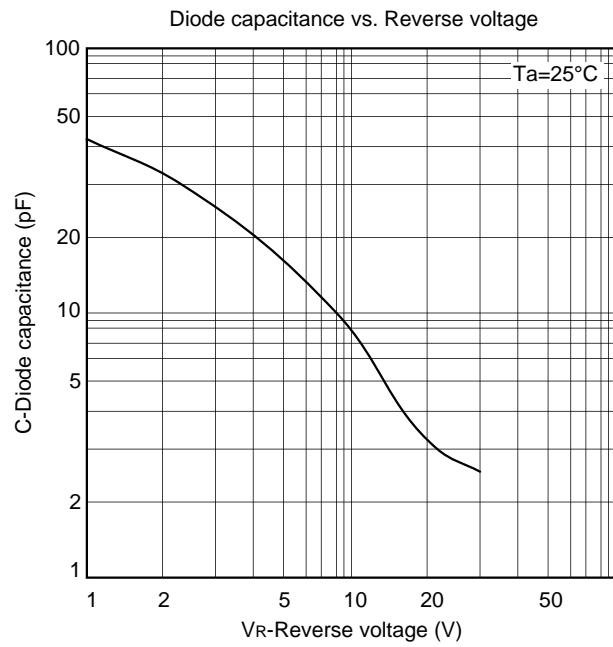

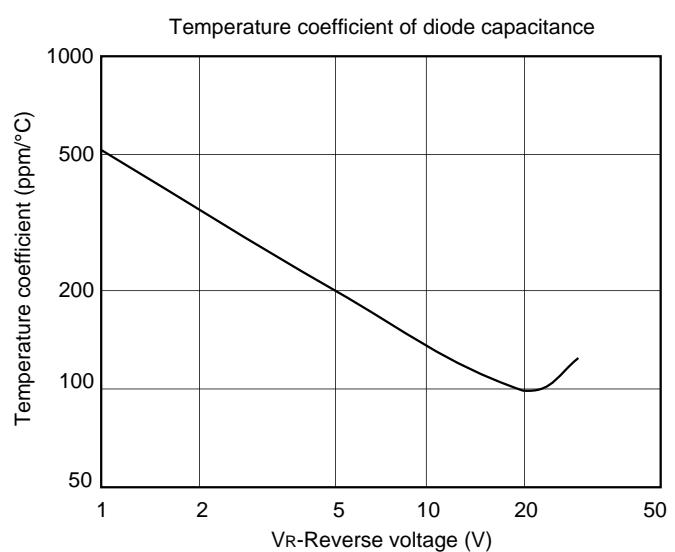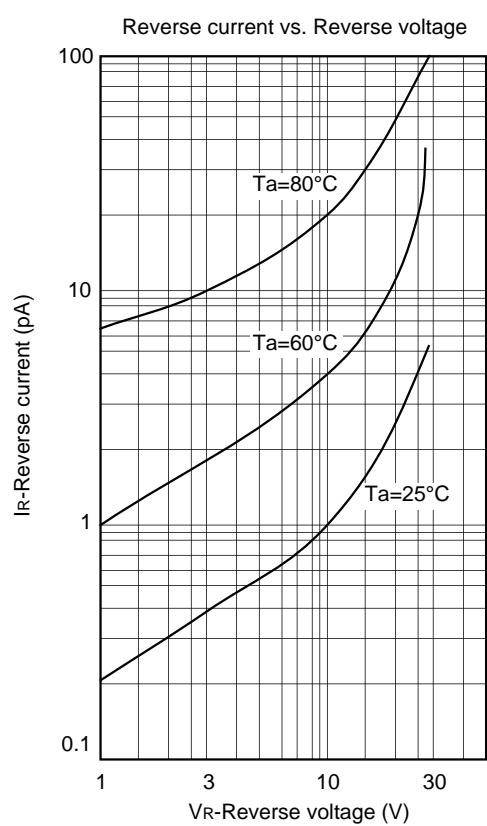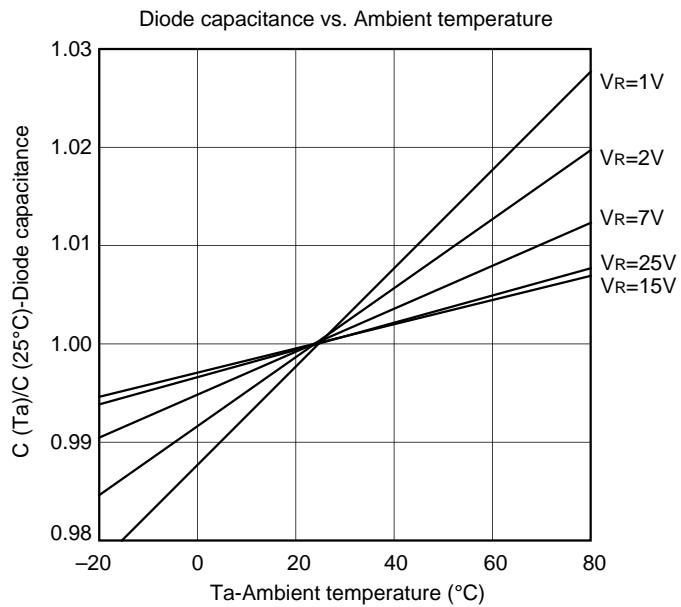

Package Outline Unit : mm

M-290

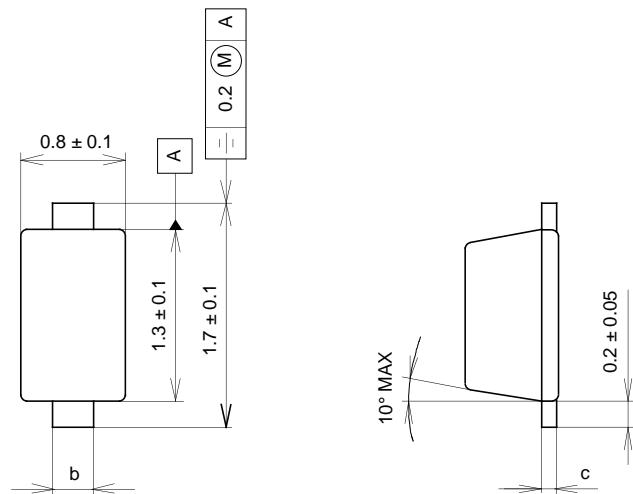

	BASE METAL	WITH PLATING
c	0.11 ± 0.005	0.11 +0.05 -0.01
b	0.3 ± 0.025	0.3 +0.05 -0.02

SONY CODE	M-290
EIAJ CODE	
JEDEC CODE	

PACKAGE MATERIAL	EPOXY RESIN
LEAD TREATMENT	SOLDER PLATING
LEAD MATERIAL	COPPER
PACKAGE WEIGHT	0.002g

Mark