

[查询B3874供应商](#)

[捷多邦，专业PCB打样工厂，24小时加急出货](#)



# SAW Components

Data Sheet B3874

Data Sheet

EP



## SAW Components

**B3874**

## Low-Loss Filter

71,1 MHz


## Data Sheet

## Features

- Low-loss IF filter for CDMA base station
- Temperature stable
- Ceramic SMD package
- Unbalanced or balanced operation

## Terminals


### ■ Gold plated

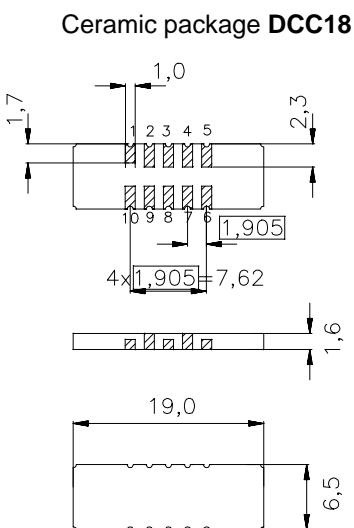

Dimensions in mm, approx. weight 0,8 g

## Pin configuration

1	Input or balanced input
10	Input ground or balanced input
6	Output or balanced output
5	Output ground or balanced output
3, 8	Ground
2, 4, 7, 9	Case ground

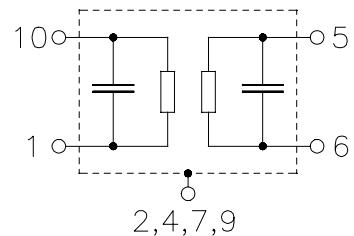

Type	Ordering code	Marking and Package according to	Packing according to
B3874	B39710-B3874-U210	C61157-A7-A54	F61074-V8166-Z000

## **Electrostatic Sensitive Device (ESD)**

## Maximum ratings

Operable temperature range	$T$	–40 / +85	°C	
Storage temperature range	$T_{\text{stg}}$	–40 / +85	°C	
DC voltage	$V_{\text{DC}}$	5	V	
Source power	$P_s$	10	dBm	

**SAW Components****B3874****Low-Loss Filter****71,1 MHz****Data Sheet****Characteristics**

Operating temperature range:

 $T = 0$  to  $+85$  °C

Terminating source impedance:

 $Z_S = 50 \Omega$  and external matching network

Terminating load impedance:

 $Z_L = 50 \Omega$  and external matching network

			<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Nominal frequency</b>	$f_N$		—	71,1	—	MHz
<b>Minimum insertion attenuation</b>	$\alpha_N$		—	9,0	11,0	dB
<b>3,75 dB bandwidth</b>						
$\alpha_{\text{rel}}$	$\leq 3,75$ dB	$B_{3,75\text{dB}}$	1,18	1,24	—	MHz
<b>Amplitude ripple (p-p)</b>	$f_N \pm 525$ kHz	$\Delta\alpha$	—	0,5	1,0	dB
<b>Phase Linearity (rms)</b>	$f_N \pm 630$ kHz	$\Delta\phi$	—	1,3	2,0	deg
<b>Absolute group delay</b>	$f_N \pm 630$ kHz	$\tau$	—	3,1	—	μs
<b>Group delay ripple (p-p)</b>	$f_N \pm 525$ kHz	$\Delta\tau$	—	320	450	ns
<b>Relative attenuation (relative to <math>\alpha_N</math>)</b>		$\alpha_{\text{rel}}$				
31,0 MHz	...	$f_N - 4900$ kHz	45	60	—	dB
$f_N - 4900$ kHz	...	$f_N - 900$ kHz	26	29	—	dB
$f_N - 900$ kHz	...	$f_N - 750$ kHz	15	18	—	dB
$f_N + 750$ kHz	...	$f_N + 900$ kHz	15	17	—	dB
$f_N + 900$ kHz	...	$f_N + 4900$ kHz	26	29	—	dB
$f_N + 4900$ kHz	...	500 MHz	45	60	—	dB
<b>Input Return loss</b>	$f_N \pm 525$ kHz		8	11	—	dB
<b>Output Return loss</b>	$f_N \pm 525$ kHz		10	15	—	dB
<b>3rd-order intercept point</b>		$IP3$	35	—	—	dB
<b>Temperature coefficient of frequency</b> <sup>1)</sup>		$TC_f$	—	-0,036	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>		$T_0$	—	35	—	°C

<sup>1)</sup> Temperature dependance of  $f_c$ :  $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



SAW Components


B3874

Low-Loss Filter


71,1 MHz

Data Sheet

### Normalized frequency response

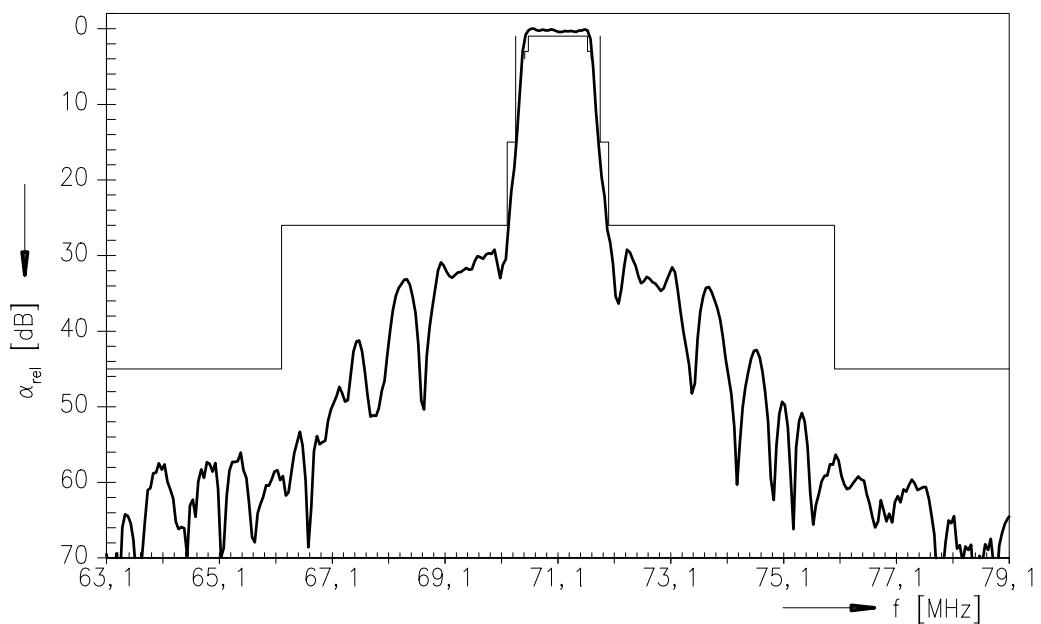

### Normalized frequency response (pass band)

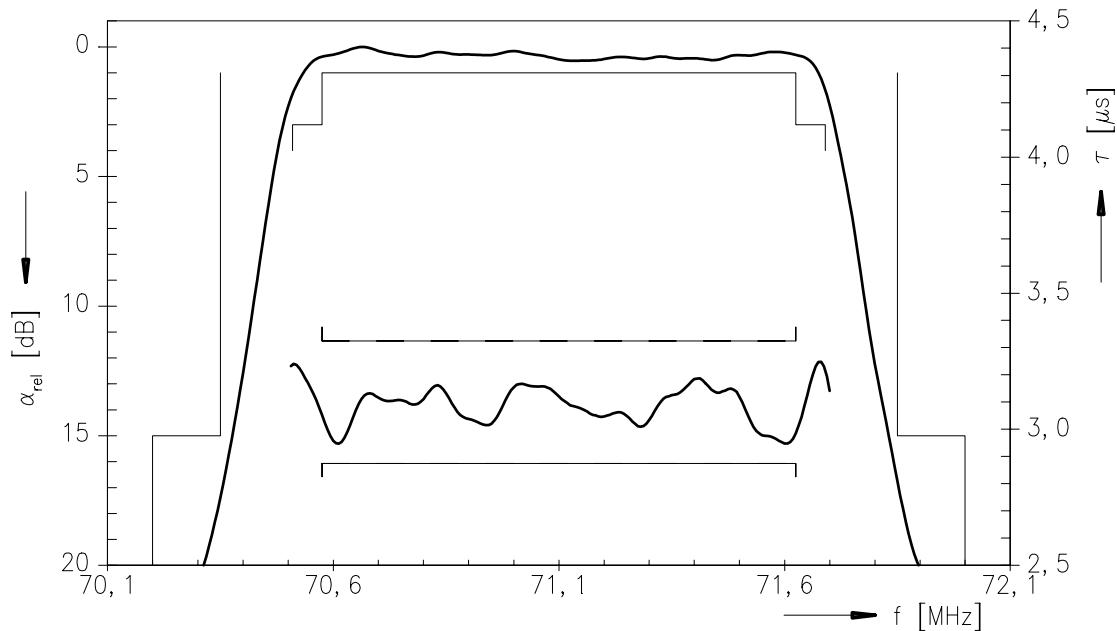



**SAW Components**


**B3874**

**Low-Loss Filter**

**71,1 MHz**

**Data Sheet**

**Normalized frequency response (wide band)**

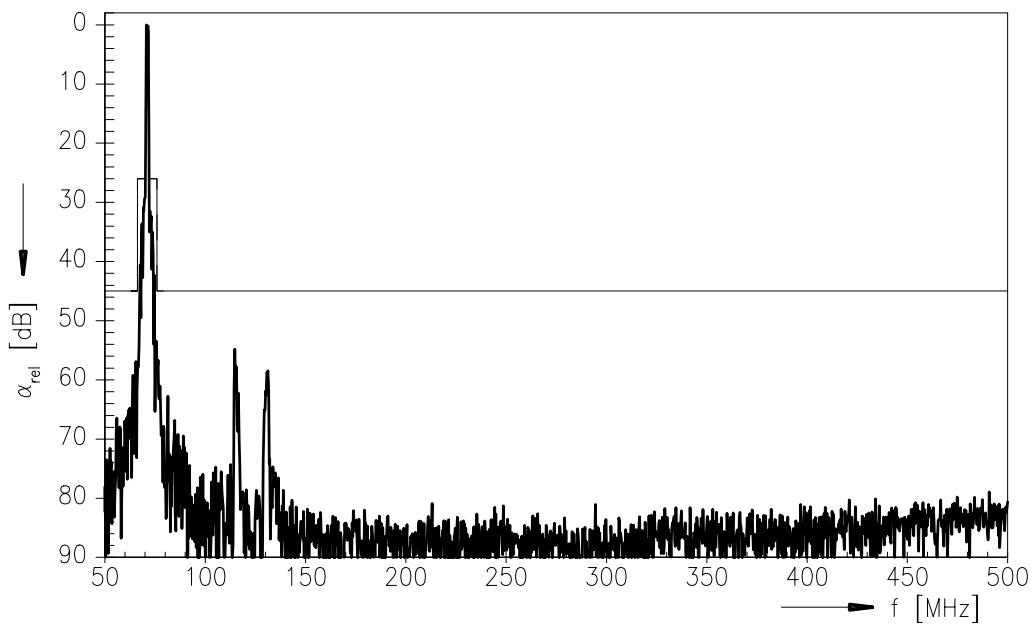



**SAW Components**

**B3874**


**Low-Loss Filter**

**71,1 MHz**

**Data Sheet**

**Matching network to 50  $\Omega$**

(Element values depend on PCB layout)

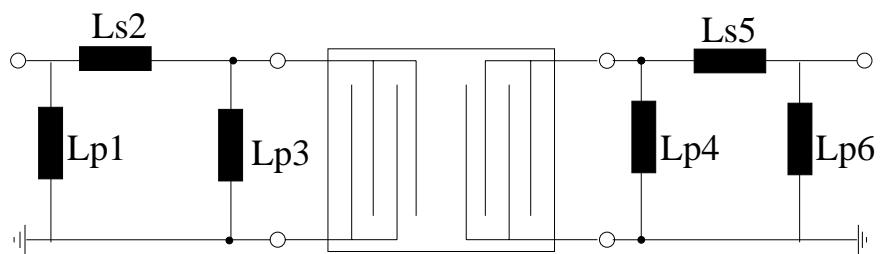

$Lp1 = 150 \text{ nH}$

$Lp4 = 470 \text{ nH}$

$Ls2 = 390 \text{ nH}$

$Ls5 = 620 \text{ nH}$

$Lp3 = 330 \text{ nH}$

$Lp6 = \text{not used}$



<b>SAW Components</b>	<b>B3874</b>
<b>Low-Loss Filter</b>	<b>71,1 MHz</b>

## Data Sheet

**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, SAW MC**  
**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.