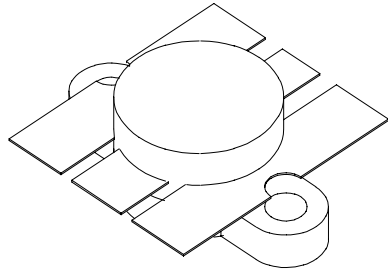


UMIL 80

80 Watts, 28 Volts, Class AB
Defcom 200 - 500 MHz

| | |
|---|---|
| <p>GENERAL DESCRIPTION</p> <p>The UMIL80 is a double input matched COMMON EMITTER broadband transistor specifically intended for use in the 200-500 MHz frequency band. It may be operated in Class AB or C. Gold metallization and silicon diffused resistors ensure ruggedness and high reliability.</p> | <p>CASE OUTLINE 55HV, Style 2</p>  |
| <p>ABSOLUTE MAXIMUM RATINGS</p> <p>Maximum Power Dissipation @ 25°C 220 Watts</p> <p>Maximum Voltage and Current</p> <p>BVces Collector to Emitter Voltage 65 Volts BVebo Emitter to Base Voltage 4.0 Volts Ic Collector Current 12 A</p> <p>Maximum Temperatures</p> <p>Storage Temperature - 65 to +150°C Operating Junction Temperature +200°C</p> | |

ELECTRICAL CHARACTERISTICS @ 25 °C

| SYMBOL | CHARACTERISTICS | TEST CONDITIONS | MIN | TYP | MAX | UNITS |
|-------------|-------------------------|-----------------|-----|-----|-----|-------|
| Pout | Power Output | F = 400 MHz | 80 | | | Watts |
| Pin | Power Input | Vcc = 28 Volts | | | 10 | Watts |
| Pg | Power Gain | | 9.0 | 9.5 | | dB |
| η_c | Efficiency | | 55 | | | % |
| VSWR | Load Mismatch Tolerance | | | | 5:1 | |

| | | | | | | |
|---------------|--------------------------------|---------------------|-----|----|-----|-------|
| BVebo | Emitter to Base Breakdown | Ie = 5 mA | 4.0 | | | Volts |
| BVces | Collector to Emitter Breakdown | Ic = 20 mA | 60 | | | Volts |
| BVceo | Collector to Emitter Breakdown | Ie = 20 mA | 31 | | | Volts |
| BVcbo | Collector to Base Breakdown | Ic = 20 mA | 60 | | | Volts |
| Cob | Output Capacitance | Vcb=28 V, F= 1 MHz | | 80 | | pF |
| h_{FE} | DC - Current Gain | Vce = 5 V, Ic = 1 A | 10 | | | |
| θ_{jc} | Thermal Resistance | | | | 0.8 | °C/W |


Issue October 1998 : Correct Case from Hu to HV

GHZ TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHZ RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.

GHZ Technology Inc. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 Tel. 408 / 986-8031 Fax 408 / 986-8120


POWER OUTPUT vs POWER INPUT

$V_{cc}=28V$ $f=400MHz$

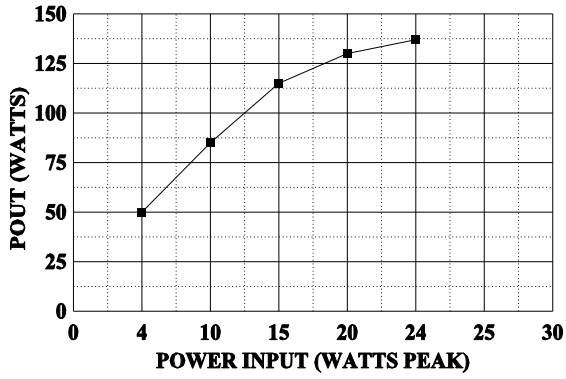

fT vs Ic

$V_{cc}=5V$, $T_c=25C$

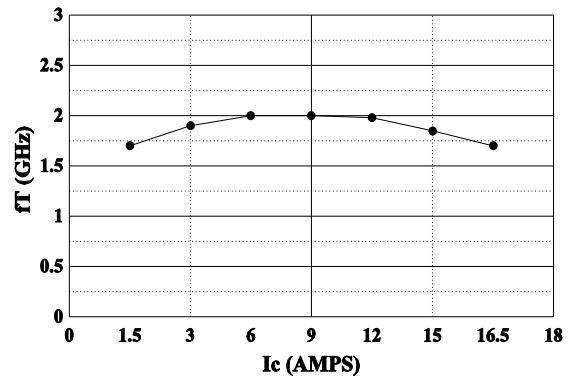

DC SAFE OPERATING AREA

