


SKiIP 02NEB066V1

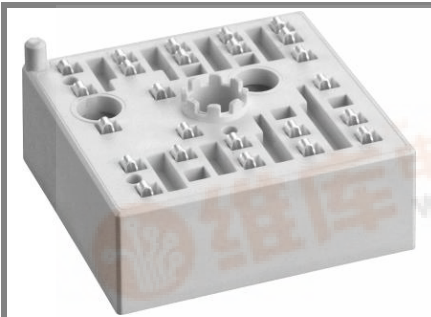

MiniSKiIP® 1

3-phase bridge rectifier +
brake chopper + 3-phase
bridge inverter
SKiIP 02NEB066V1


Target Data

Features

- Trench IGBTs
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

Typical Applications



- Inverter up to 5 kVA
- Typical motor power 2,2 kW

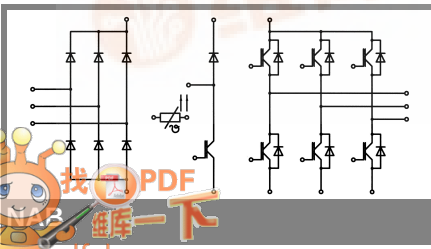

Absolute Maximum Ratings		$T_s = 25\text{ }^{\circ}\text{C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT - Inverter, Chopper			
V_{CES}	$T_s = 25\text{ (70)}\text{ }^{\circ}\text{C}$	600	V
I_C	$T_s = 25\text{ (70)}\text{ }^{\circ}\text{C}, t_p \leq 1\text{ ms}$		A
I_{CRM}			A
V_{GES}		± 20	V
T_j		- 40 ... + 150	$^{\circ}\text{C}$
Diode - Inverter, Chopper			
I_F	$T_s = 25\text{ (70)}\text{ }^{\circ}\text{C}$		A
I_{FRM}	$T_s = 25\text{ (70)}\text{ }^{\circ}\text{C}, t_p \leq 1\text{ ms}$		A
T_j		- 40 ... + 150	$^{\circ}\text{C}$
Diode - Rectifier			
V_{RRM}	$T_s = 70\text{ }^{\circ}\text{C}$	800	V
I_F		35	A
I_{FSM}	$t_p = 10\text{ ms}, \sin 180^{\circ}, T_j = 25\text{ }^{\circ}\text{C}$	220	A
i^2t	$t_p = 10\text{ ms}, \sin 180^{\circ}, T_j = 25\text{ }^{\circ}\text{C}$	240	A^2s
T_j		- 40 ... + 150	$^{\circ}\text{C}$
I_{tRMS}	per power terminal (20 A / spring)	20	A
T_{stg}	$T_{op} \leq T_{stg}$	- 40 ... + 125	$^{\circ}\text{C}$
V_{isol}	AC, 1 min.	2500	V

Characteristics		$T_s = 25\text{ }^{\circ}\text{C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT - Inverter, Chopper					
V_{CEsat}	$I_C = 10\text{ A}, T_j = 25\text{ (125)}\text{ }^{\circ}\text{C}$		2 (2,2)	2,5 (2,7)	V
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 0,5\text{ mA}$	3	4	5	V
$V_{CE(TO)}$	$T_j = 25\text{ (125)}\text{ }^{\circ}\text{C}$		1,2 (1,1)	1,3 (1,2)	V
r_T	$T_j = 25\text{ (125)}\text{ }^{\circ}\text{C}$		80 (110)	120 (150)	m Ω
C_{ies}	$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$		0,62		nF
C_{oes}	$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$		0,13		nF
C_{res}	$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$		0,06		nF
$R_{th(j-s)}$	per IGBT		1,5		K/W
$t_{d(on)}$	under following conditions		20		ns
t_r	$V_{CC} = 300\text{ V}, V_{GE} = \pm 15\text{ V}$		25		ns
$t_{d(off)}$	$I_C = 10\text{ A}, T_j = 125\text{ }^{\circ}\text{C}$		225		ns
t_f	$R_{Gon} = R_{Goff} = 60\text{ }\Omega$		15		ns
E_{on}	inductive load		0,3		mJ
E_{off}			0,23		mJ
Diode - Inverter, Chopper					
$V_F = V_{EC}$	$I_F = 10\text{ A}, T_j = 25\text{ (125)}\text{ }^{\circ}\text{C}$		1,4 (1,4)	1,7 (1,7)	V
$V_{(TO)}$	$T_j = 25\text{ (125)}\text{ }^{\circ}\text{C}$		1 (0,9)	1,1 (1)	V
r_T	$T_j = 25\text{ (125)}\text{ }^{\circ}\text{C}$		45 (50)	60 (70)	m Ω
$R_{th(j-s)}$	per diode		2,5		K/W
I_{RRM}	under following conditions		20		A
Q_{rr}	$I_F = 10\text{ A}, V_R = 300\text{ V}$		1		μC
E_{rr}	$V_{GE} = 0\text{ V}, T_j = 125\text{ }^{\circ}\text{C}$		0,2		mJ
	$di_F/dt = 1200\text{ A}/\mu\text{s}$				
Diode - Rectifier					
V_F	$I_F = 15\text{ A}, T_j = 25\text{ }^{\circ}\text{C}$		1,1		V
$V_{(TO)}$	$T_j = 150\text{ }^{\circ}\text{C}$		0,8		V
r_T	$T_j = 150\text{ }^{\circ}\text{C}$		20		m Ω
$R_{th(j-s)}$	per diode		1,5		K/W
Temperature Sensor					
R_{ts}	3 %, $T_r = 25\text{ (100)}\text{ }^{\circ}\text{C}$		1000(1670)		Ω
Mechanical Data					
w			35		g
M_s	Mounting torque	2		2,5	Nm

SKiiP 02NEB066V1

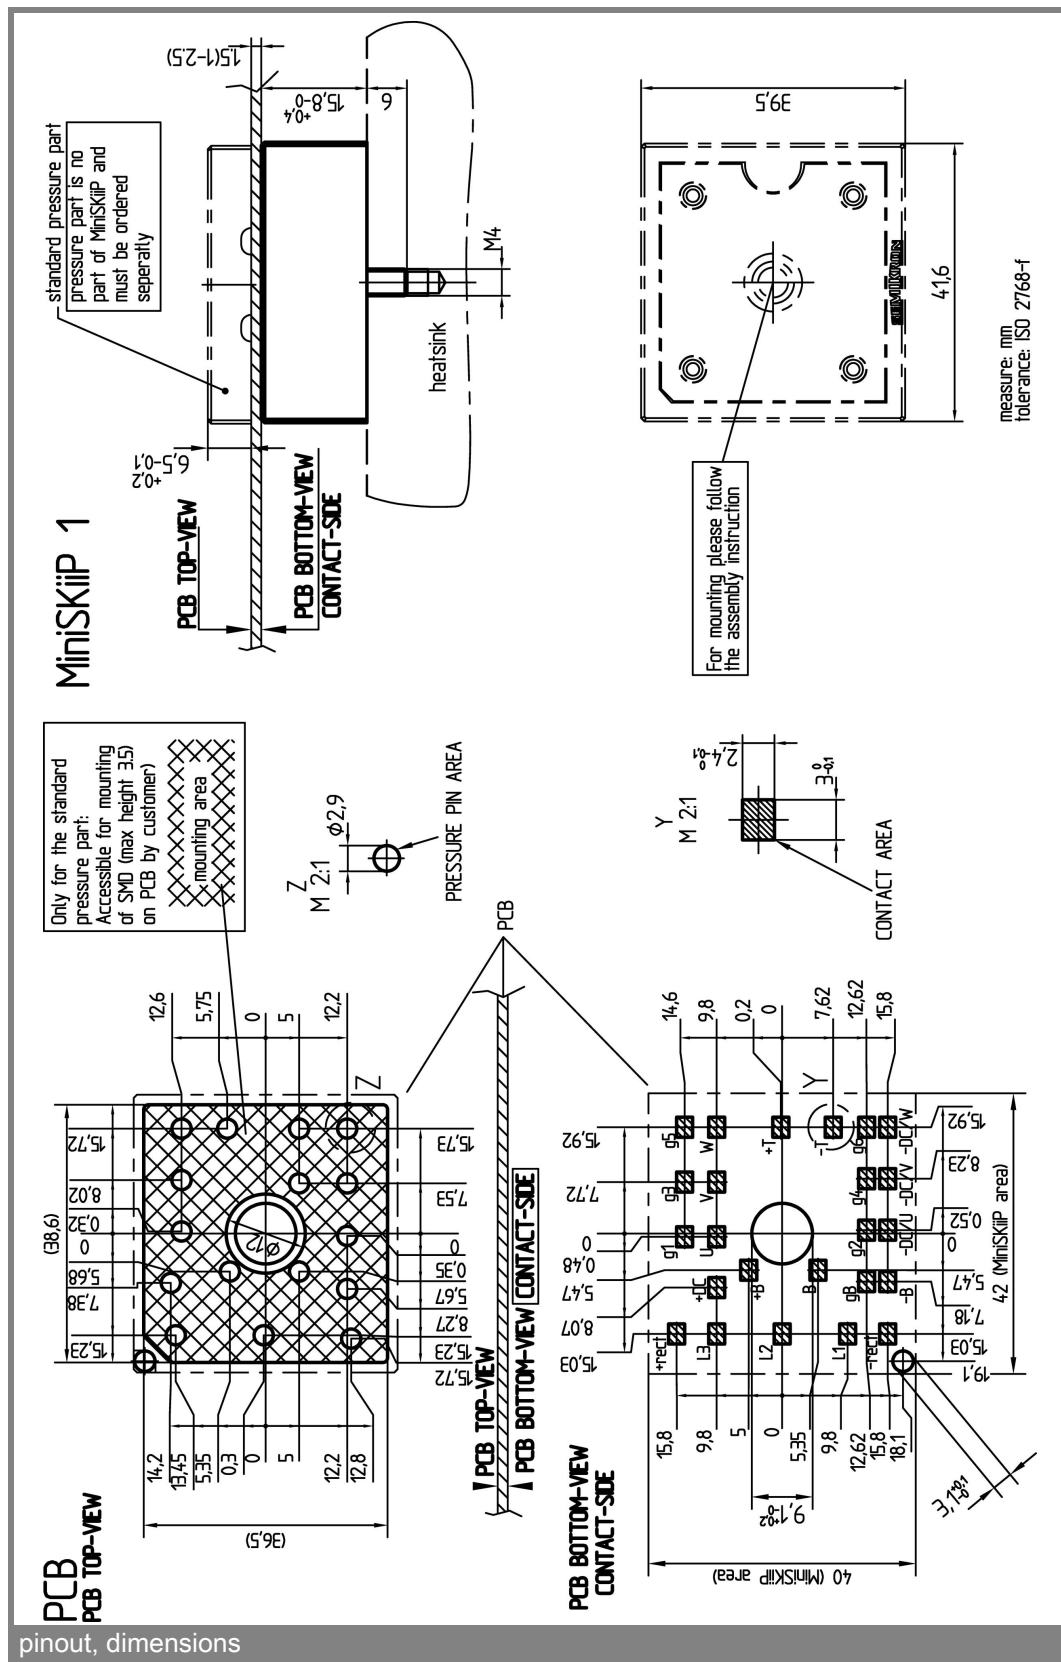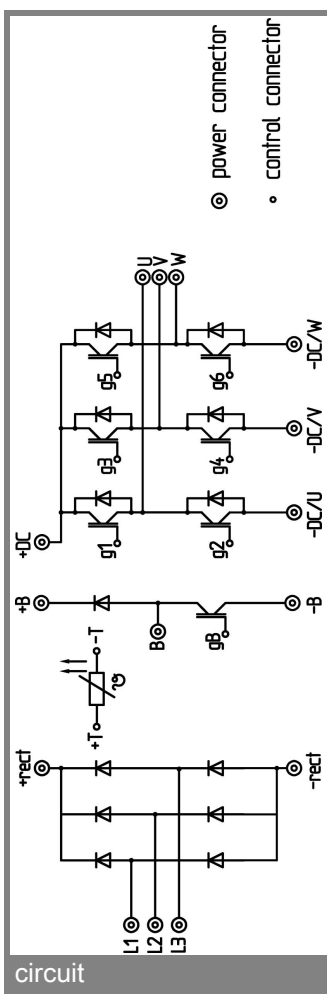

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.