



SIGC156T120R2CQ

IGBT Chip in Fieldstop-technology

FEATURES:


- 1200V Fieldstop technology 120µm chip
- low turn-off losses
- short tail current
- positive temperature coefficient
- integrated gate resistor

This chip is used for:

- IGBT Modules

Applications:

- SMPS, resonant applications



Chip Type	V _{CE}	I _{Ch}	Die Size	Package	Ordering Code
SIGC156T120R2CQ	1200V	100A	12.59 X 12.59 mm ²	sawn on foil	SP0000-83655

MECHANICAL PARAMETER:

Raster size	12.59 X 12.59	mm ²
Emitter pad size	8 x (3.98 x 2.38)	
Gate pad size	1.46 x 0.8	
Area total / active	158.5 / 132.6	
Thickness	120	µm
Wafer size	150	mm
Flat position	90	grd
Max.possible chips per wafer	82 pcs	
Passivation frontside	Photoimide	
Emitter metallization	3200 nm Al Si Cu	
Collector metallization	1400 nm Ni Ag –system suitable for epoxy and soft solder die bonding	
Die bond	electrically conductive glue or solder	
Wire bond	Al, <500µm	
Reject Ink Dot Size	Ø 0.65mm ; max 1.2mm	
Recommended Storage Environment	store in original container, in dry nitrogen, < 6 month at an ambient temperature of 23°C	



SIGC156T120R2CQ

MAXIMUM RATINGS:

Parameter	Symbol	Value	Unit
Collector-emitter voltage, $T_j=25\text{ }^\circ\text{C}$	V_{CE}	1200	V
DC collector current, limited by $T_{j\max}$	I_C	1)	A
Pulsed collector current, t_p limited by $T_{j\max}$	I_{Cpulse}	300	A
Gate emitter voltage	V_{GE}	± 20	V
Operating junction and storage temperature	T_j, T_{stg}	-40 ... +150	$^\circ\text{C}$

1) depending on thermal properties of assembly

STATIC CHARACTERISTICS (tested on chip), $T_j=25\text{ }^\circ\text{C}$, unless otherwise specified:

Parameter	Symbol	Conditions	Value			Unit
			Min.	typ.	max.	
Collector-emitter breakdown voltage	$V_{(BR)CES}$	$V_{GE}=0\text{V}$, $I_C=5\text{mA}$	1200			
Collector-emitter saturation voltage	$V_{CE(\text{sat})}$	$V_{GE}=15\text{V}$, $I_C=100\text{A}$		2.1		V
Gate-emitter threshold voltage	$V_{GE(\text{th})}$	$I_C=4\text{mA}$, $V_{GE}=V_{CE}$		5.5		
Zero gate voltage collector current	I_{CES}	$V_{CE}=1200\text{V}$, $V_{GE}=0\text{V}$			12	μA
Gate-emitter leakage current	I_{GES}	$V_{CE}=0\text{V}$, $V_{GE}=20\text{V}$			600	nA
Integrated gate resistor	R_{Gint}			5	7	Ω

ELECTRICAL CHARACTERISTICS (tested at component):


Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
Input capacitance	C_{iss}	$V_{CE}=25\text{V}$,		7850		pF
Output capacitance	C_{oss}	$V_{GE}=0\text{V}$,		650		
Reverse transfer capacitance	C_{rss}	$f=1\text{MHz}$		275		

SWITCHING CHARACTERISTICS (tested at component), Inductive Load

Parameter	Symbol	Conditions 1)	Value			Unit
			min.	typ.	max.	
Turn-on delay time	$t_{d(on)}$	$T_j=125\text{ }^\circ\text{C}$ $V_{CC}=600\text{V}$, $I_C=100\text{A}$, $V_{GE}=-15/15\text{V}$, $R_{Gext}= 5.6\text{ } \Omega$		234		ns
Rise time	t_r			40		
Turn-off delay time	$t_{d(off)}$			367		
Fall time	t_f			84		

1) values also influenced by parasitic L- and C- in measurement and package.

CHIP DRAWING:

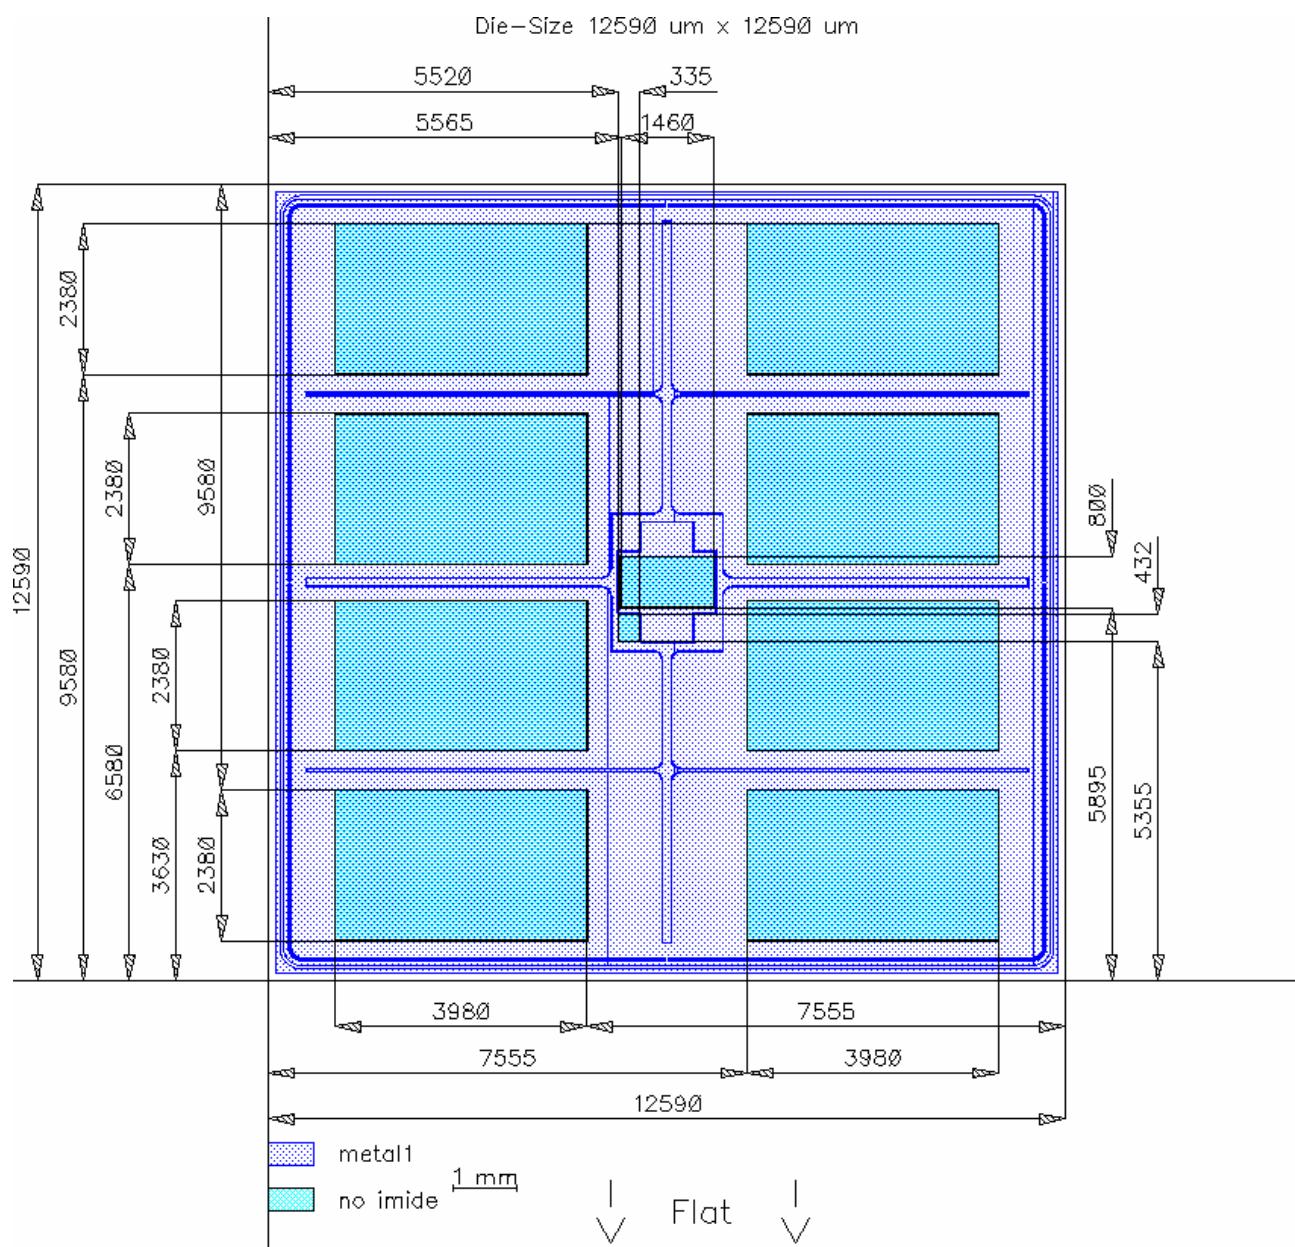



SIGC156T120R2CQ

FURTHER ELECTRICAL CHARACTERISTICS:

This chip data sheet refers to the
device data sheet

DESCRIPTION:

AQL 0,65 for visual inspection according to failure catalog

Electrostatic Discharge Sensitive Device according to MIL-STD 883

Test-Normen Villach/Prüffeld

Published by
Infineon Technologies AG,
D-81726 München
All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives world-wide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and / or maintain and sustain and / or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.