


Fast-Acting Ferrule Fuses

13/32" x 1-3/8"

BBS



Dimensional Data

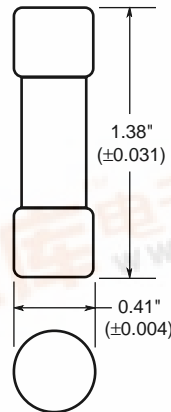

CATALOG SYMBOL: BBS

FAST-ACTING

1/10 TO 30 AMPERES

INTERRUPTING RATING: 10 KA

U.L. LISTED, STD. 248-14

0-5A/600 VAC OR LESS, 6-10A/250VAC

(GUIDE #JDYX, FILE #E19180)

CSA CERTIFIED, C22.2 NO. 248.14

0-5A/600V, 6-10A/250VAC


(CLASS #1422-01, FILE #53787)

Electrical Ratings (Catalog Symbol and Amperes)

600 VAC		250 VAC	48 VAC
BBS-1/10	BBS-1	BBS-6	BBS-12
BBS-2/10	BBS-1-1/2	BBS-7	BBS-15
BBS-1/4	BBS-1-6/10	BBS-8	BBS-20
BBS-4/10	BBS-1-8/10	BBS-10	BBS-25
BBS-1/2	BBS-2	—	BBS-30
BBS-6/10	BBS-3	—	—
BBS-3/4	BBS-4	—	—
BBS-8/10	BBS-5	—	—

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 VAC, 75-1500 VDC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Time-Current Characteristic Curves—Average Melt

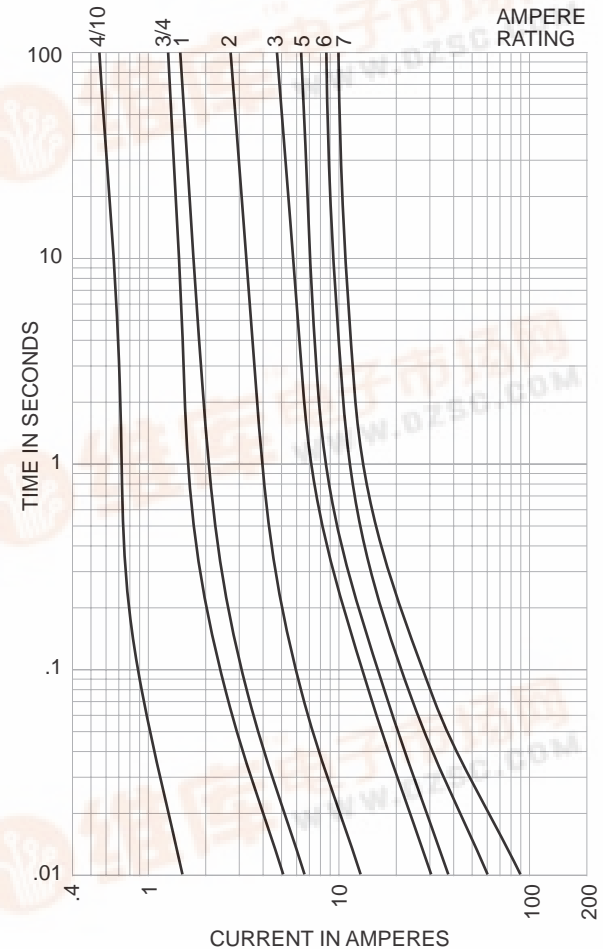

- For control circuits, gaseous vapor fixture, HID ballasts; electronic circuits and hand-held meters.
- Mount in Buss panel-mount fuseholder HPS-L, or 13/32" clips.
- Fibre Tube.
- Nickel Plated Brass Endcaps.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.