




JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

TO-220 Plastic-Encapsulate Voltage Regulator

CJ7805 Three-terminal positive voltage regulator**FEATURES**Maximum Output current I_{OM} : 1.5 AOutput voltage V_o : 5V


Continuous total dissipation

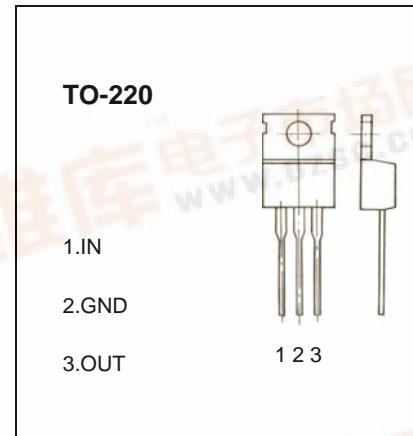 P_D : 2 W ($T_J = 25^\circ C$)**ABSOLUTE MAXIMUM RATINGS**(Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal resistance junction-air	$R \theta JA$	65	°C/W
Thermal resistance junction-cases	$R \theta JC$	5	°C/W
Operating Junction Temperature Range	T_{OPR}	0-150	°C
Storage Temperature Range	T_{STG}	-65-150	°C

ELECTRICAL CHARACTERISTICS($V_i=10V, I_o=500mA, 0^\circ C < T_j < 125^\circ C, C_i=0.33 \mu F, C_o=0.1 \mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_J=25^\circ C$	4.8	5.0	5.2	V
		$7V \leq V_i \leq 20V, I_o=5mA-1A, P < 15W$	4.75	5.00	5.25	V
Load Regulation	ΔV_o	$T_J=25^\circ C, I_o=5mA-1.5A$		9	100	mV
		$T_J=25^\circ C, I_o=250mA-750mA$		4	50	mV
Line regulation	ΔV_o	$7V \leq V_i \leq 25V, T_J=25^\circ C$		4	100	mV
		$8V \leq V_i \leq 12V, T_J=25^\circ C$		1.6	50	mV
Quiescent Current	I_q	$T_J=25^\circ C$		5	8	mA
Quiescent Current Change	ΔI_q	$7V \leq V_i \leq 25V$		0.3	1.3	mA
		$5mA \leq I_o \leq 1A$		0.03	0.5	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$		42		uV
Output voltage drift	$\Delta V_o / \Delta T$	$I_o=5mA$		-0.8		mV/°C
Ripple Rejection	RR	$8V \leq V_i \leq 18V, f=120Hz, T_J=25^\circ C$	62	73		dB
Dropout Voltage	V_d	$T_J=25^\circ C, I_o=1A$		2		V
Output resistance	R_o	$f=1KHz$		15		$m\Omega$
Short Circuit Current	I_{sc}	$V_i=35V, T_J=25^\circ C$		230		mA
Peak Current	I_{pk}	$T_J=25^\circ C$		2.2		A

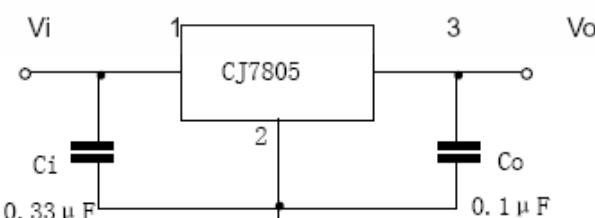TYPICAL APPLICATION

Typical Characteristics

CJ7805

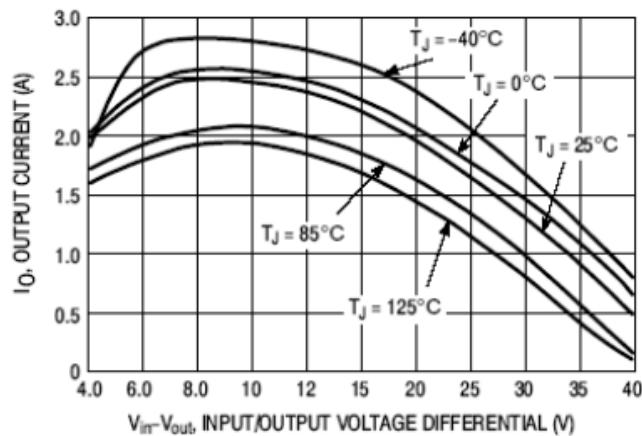


Figure 1 Peak Output Current as a Function of Input/Output Differential Voltage

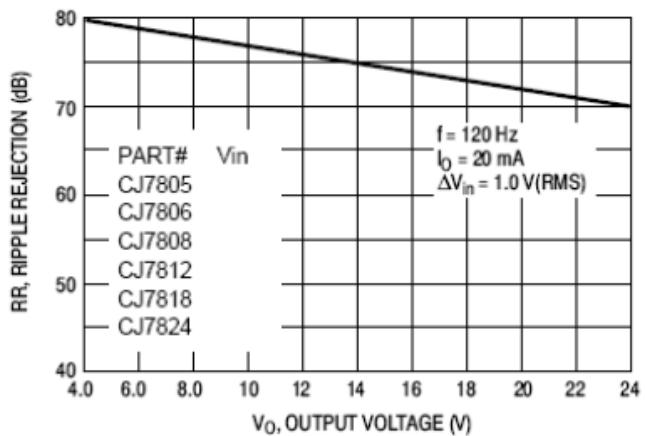


Figure 2 Ripple Rejection as a Function of Output Voltages

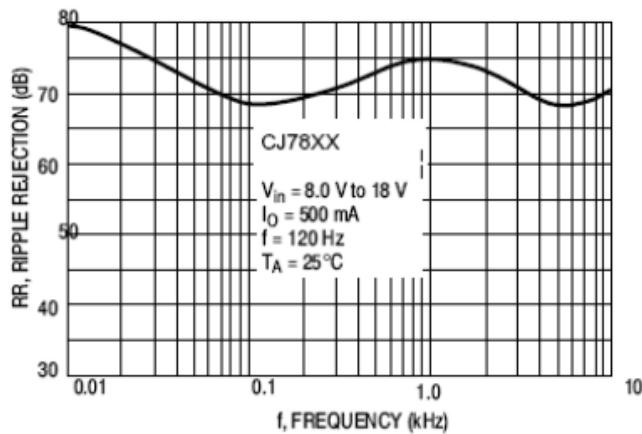


Figure 3 Ripple Rejection as a Function of Frequency

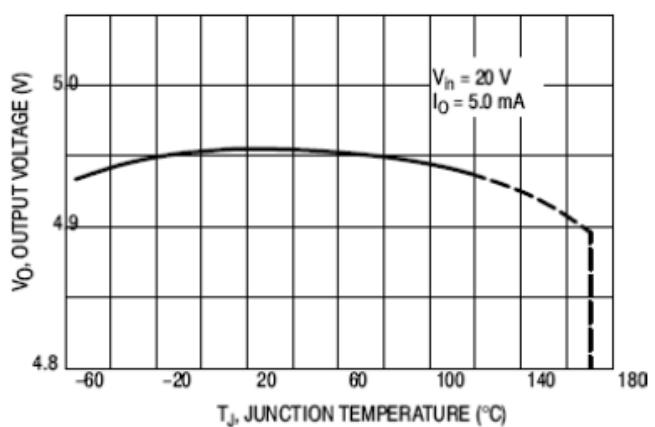


Figure 4 Output Voltage as a Function of Junction Temperature

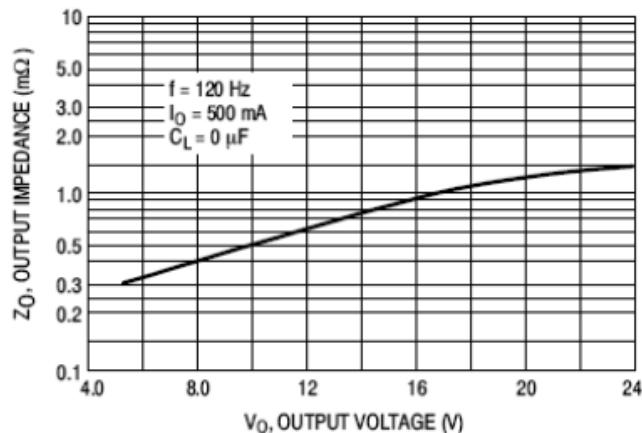


Figure 5 Output Impedance as a Function of Output Voltage

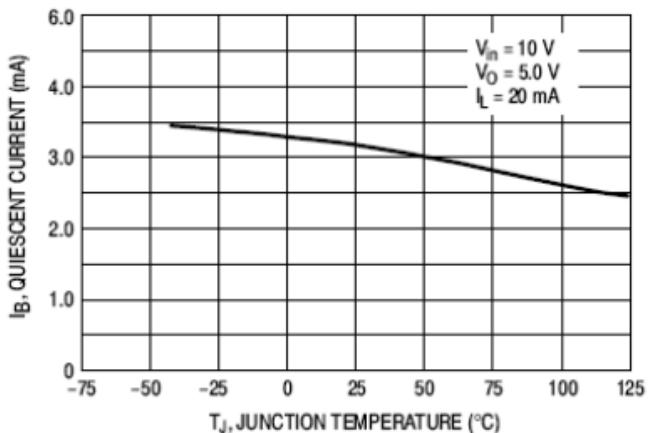


Figure 6 Quiescent Current as a Function of Temperature