

Monitoring Relays

Frequency Monitoring

Types DFB01, PFB01



DFB01



PFB01

CARLO GAVAZZI

- Over/under frequency monitoring relays
- Measuring if power supply frequency is within set limits
- Measure on own power supply
- Measuring ranges
 - Voltage: 24 to 240 VAC
 - Frequency: 50 - 60 Hz
- Separately adjustable upper/lower level on relative scale
- Adjustable delay on alarm or on recovery (0.1 to 30 s)
- Programmable latching or inhibit at set level
- Output: 8 A SPDT relay N.D. or N.E. selectable
- For mounting on DIN-rail in accordance with DIN/EN 50 022 (DFB01) or plug-in module (PFB01)
- 22.5 mm Euronorm housing (DFB01) or 36 mm plug-in module (PFB01)
- LED indication for relay, alarm and power supply ON

Product Description

DFB01 and PFB01 are precise frequency monitoring relays. The relays monitor their own power supply from 24 to 240 VAC.

The advantage of using the latch function is that the relay can be kept energized

even after the end of the alarm condition. Inhibit function can be used to avoid relay operation when not desired (maintenance, transitions). The LED's indicate the state of the alarm and the output relay.

Ordering key

DFB 01 C M24

Housing	_____
Function	_____
Type	_____
Item number	_____
Output	_____
Power Supply	_____

Type Selection

Mounting	Output	Measuring range
DIN-rail	SPDT	50-60 Hz
Plug-in	SPDT	50-60 Hz

Supply: 24 to 240 VAC

DFB 01 C M24
PFB 01 C M24

Input Specifications

Input		
Own power supply	DFB01:	A1, A2 (24 to 240 VAC)
	PFB01:	2, 10 (24 to 240 VAC)
Measuring ranges	Upper level	Lower level
Selectable by DIP-switches		
2 Hz range	-0.2 to +2 Hz	-2 to +0.2 Hz
	50 Hz	49.8 to 52 Hz
	60 Hz	48 to 50.2 Hz
10 Hz range	59.8 to 62 Hz	58 to 60.2 Hz
	50 Hz	-1 to +10 Hz
	60 Hz	49 to 60 Hz
		40 to 51 Hz
		59 to 70 Hz
		50 to 61 Hz
Contact input		
DFB02	Terminals Z1, Z2	
PFB02	Terminals 8, 9	
Disabled	> 10 kΩ	
Enabled	< 500 Ω	
Pulse width	> 500 ms	
Hysteresis	2 Hz range	~ 0.05 Hz
	10 Hz range	~ 0.25 Hz

Output Specifications

Output	SPDT relay
Rated insulation voltage	250 VAC
Contact ratings (AgSnO ₂)	μ
Resistive loads	8 A @ 250 VAC
	5 A @ 24 VDC
Small inductive loads	2.5 A @ 250 VAC
	2.5 A @ 24 VDC
Mechanical life	≥ 30 x 10 ⁶ operations
Electrical life	≥ 10 ⁵ operations (at 8 A, 250 V, cos φ = 1)
Operating frequency	≤ 7200 operations/h
Dielectric strength	
Dielectric voltage	≥ 2 kVAC (rms)
Rated impulse withstand volt.	4 kV (1.2/50 μs)

Supply Specifications

Power supply	Overvoltage cat. III (IEC 60664, IEC 60038)
Rated operational voltage Through terminals:	
DFB01: A1, A2	24 to 240 VAC \pm 15%
PFB01: 2,10	24 to 240 VAC \pm 15%
Dielectric voltage	
Supply to output	4 kV
Rated operational power	4 W

Mode of Operation

DFB01 and PFB01 monitor the frequency value of their own power supply.

Example 1
(Non-latching mode - N.D. relay)

The relay operates and the yellow LED is ON as soon as the measured frequency exceeds the upper set level or drops below the lower set level for more than the set delay time. The relay releases when the measured frequency comes back within the upper and lower limits. The red LED flashes until the delay time has expired or the measured value falls off the limits.

Example 2
(Latching mode - N.E. relay)

The relay operates and the yellow LED is ON as long as the measured frequency is within the upper and lower limits. The relay releases and latches in alarm position as soon as the measured frequency exceeds the upper set level or drops below the lower set level for more than the set delay time. The red LED flashes until the delay time has expired or the measured value comes back within the limits. Provided that the frequency has dropped below the upper set level (minus hysteresis) or exceeded the lower set level (plus hysteresis), the relay operates when the interconnections between terminals Z1, Z2 or 8, 9 are interrupted.

General Specifications

Power ON delay	1 s \pm 0.5 s
Reaction time	(input signal variation from -10% to +10% or from +10% to -10% of the range) < 200 ms
Alarm ON delay	< 200 ms
Alarm OFF delay	< 200 ms
Accuracy	(15 min warm-up time) \pm 200 ppm/ $^{\circ}$ C \pm 10% on set value \pm 50 ms \pm 0.02 Hz
Indication for	LED, green LED, red (flashing 2 Hz during delay time) LED, yellow
Environment	IP 20 3 (DFB01), 2 (PFB01) -20 to 60 $^{\circ}$ C, R.H. < 95% -30 to 80 $^{\circ}$ C, R.H. < 95%
Housing dimensions	22.5 x 80 x 99.5 mm 36 x 80 x 94 mm
Weight	Approx. 150 g
Screw terminals	Max. 0.5 Nm acc. to IEC 60947
Approvals	UL, CSA
CE-Marking	Yes
EMC	Electromagnetic Compatibility According to EN 61000-6-2 According to EN 61000-6-3

Function/Range/Level and Time Delay Setting


Adjust the system frequency setting DIP switch 3 and select the desired function setting the DIP switches 1, 2 and 4 as shown on the right. To access the DIP switches open the grey plastic cover as shown on the right.

Selection of level and time delay:

Upper knob:
Setting of upper level:
-10 to +100% of the range.


Centre knob:
Setting of lower level:
-100 to +10% of the range.

Lower knob:
Setting of delay on alarm time: 0.1 to 30 s.

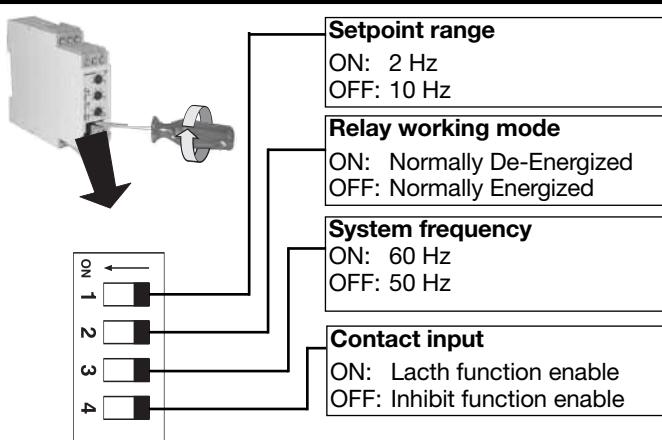


Wiring Diagrams

DFB01

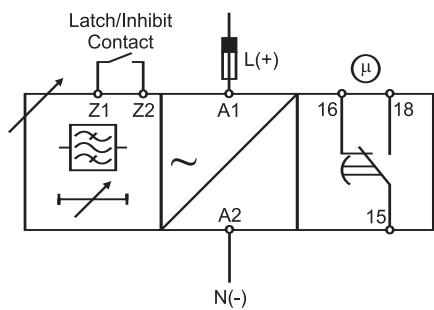


PFB01

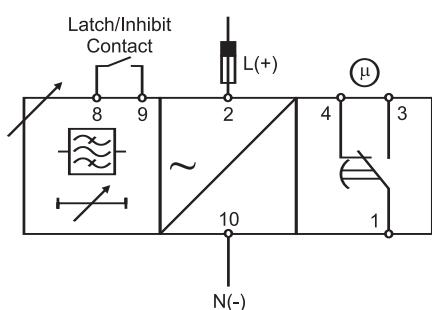


Operation Diagrams

Normally energized relay - Latch function

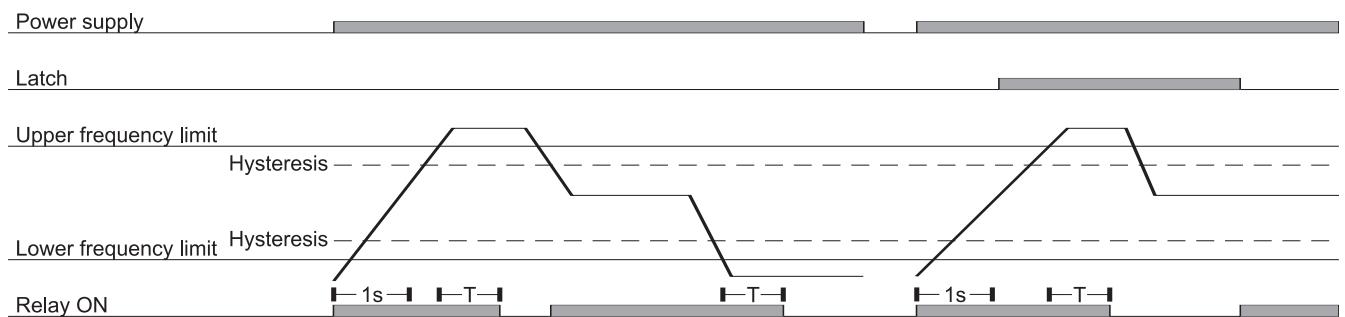

Dimensions

DIN-rail

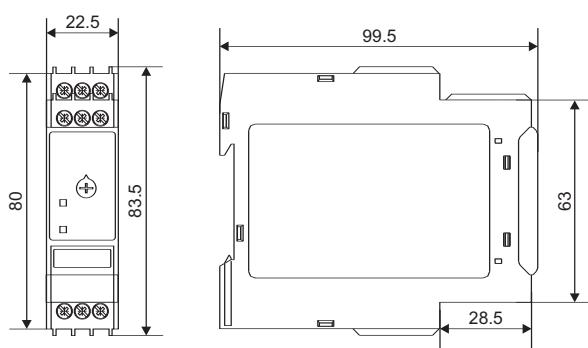

Plug-in

