

S.Q. TUBE

Special quality triode-pentode

The pentode section is designed for use as mixer and R.F. or A.F. amplifier. The triode section is designed for use as oscillator (max. freq. 300 MHz) multivibrator or blocking oscillator.



QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	330 mA
Pentode: Anode current	I_a	10 mA
Mutual conductance	S	6.2 mA/V
Amplification factor	μ	40
Triode: Anode current	I_a	14 mA
Mutual conductance	S	5 mA/V
Amplification factor	μ	18

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



E80CF

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	330	313 - 347		mA
<u>Pentode section</u>					
Anode supply voltage	V_{ba}	170			V
Grid No.2 supply voltage	V_{bg_2}	170			V
Cathode resistor	R_k	155			Ω
Anode current	I_a	10	7.5 - 12.5	min. 6	mA
Grid No.2 current	I_{g_2}	2.8	1.55 - 4.05		mA
Mutual conductance	S	6.2	5.2 - 7.2	min. 4.3	mA/V
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	40			
Internal resistance	R_i	0.4	min. 0.26		$M\Omega$
Negative grid No.1 current	$-I_{g_1}$		max. 0.5	max. 1.0	μA
<u>Triode section</u>					
Anode supply voltage	V_{ba}	100			V
Cathode resistor	R_k	120			Ω
Anode current	I_a	14	10 - 18	min. 8.4	mA
Mutual conductance	S	5.0	4 - 6	min. 3.5	mA/V
Amplification factor	μ	18			
Negative grid current	$-I_{g_1}$		max. 0.5	max. 1.0	μA

CAPACITANCES Without external shieldPentodeGrid No.1 to grid No.2, grid No.3
cathode, heater and screen $C_{g1/g2g3kfs}$

5.6

5.2 - 6

pF

Anode to grid No.2, grid No.3
cathode, heater and screen $C_{a/g2g3kfs}$

3.4

3 - 3.8

pF

Anode to grid No.1

 C_{ag1}

max. 25

mpF

Grid No.1 to heater

 C_{g1f}

max.0.16

pF

TriodeGrid to cathode (triode), cathode (pentode)
grid No.3, heater and screen $C_{g/kTkp g3fs}$

2.5

2.2 - 2.8

pF

Anode to cathode (triode), cathode (pentode)
grid No.3, heater and screen $C_{a/kTkp g3fs}$

1.5

1.2 - 1.8

pF

Anode to grid

 C_{ag}

1.5

1.2 - 1.8

pF

Grid to heater

 C_{gf}

max.0.22

pF

Pentode to triode

Anode (pentode) to anode (triode)

 C_{aP-aT}

max.0.07

pF

Anode (pentode) to grid (triode)

 C_{aP-gT}

max.0.02

pF

Grid No.1 (pentode) to anode (triode)

 C_{g1P-aT}

max.0.16

pF

MICROPHONY

The pentode section can be used without special precautions against microphony in circuits where an input voltage of more than 50 mV is required for an output of 50 mW.

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

E80CF

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Pentode section

$$V_{ba} = 170 \text{ V}$$

$$V_{bg_2} = 170 \text{ V}$$

$$R_k = 155 \Omega$$

Triode section

$$V_{ba} = 100 \text{ V}$$

$$R_k = 120 \Omega$$

LIMITING VALUES (Absolute max. rating system)

Pentode section

Anode voltage	V_{a_0}	max. 550 V
	V_a	max. 275 V
Anode dissipation	W_a	max. 2.15 W
Grid No.2 voltage	$V_{g_{20}}$	max. 550 V
Grid No.2 voltage:		
Cathode current > 10 mA	V_{g_2}	max. 200 V
Cathode current < 10 mA	V_{g_2}	max. 225 V
Grid No.2 dissipation:		
Anode dissipation > 1.2 W	W_{g_2}	max. 0.7 W
Anode dissipation < 1.2 W	W_{g_2}	max. 0.8 W
Grid No.1 dissipation	W_{g_1}	max. 0.1 W
Negative grid No.1 voltage	$-V_{g_1}$	max. 100 V
Cathode current	I_k	max. 18 mA
Voltage between cathode and heater	V_{kf}	max. 100 V
Grid resistor (fixed bias)	R_{g_1}	max. 0.5 M Ω

LIMITING VALUES (Absolute max. rating system) (continued)Triode section

Anode voltage	V_{a_0}	max. 550 V
	V_a	max. 275 V
Anode dissipation	W_a	max. 1.75 W
Grid dissipation	W_g	max. 0.1 W
Grid, voltage, peak value	V_{gp}	max. 30 V
Duty factor max. 0.04		
Pulse duration max. 0.8 ms		
Grid voltage	$-V_g$	max. 100 V
Cathode current	I_k	max. 18 mA
Cathode current peak value	I_{kp}	max. 100 mA
Duty factor max. 0.04		
Pulse duration max. 0.8 ms		
Voltage between cathode and heater	V_{kf}	max. 100 V
Grid resistor (fixed bias)	R_g	max. 0.5 M Ω
Bulb temperature	t_{bulb}	max. 170 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

E80CF

OPERATING CHARACTERISTICS

Pentode section as R.F. amplifier

Anode supply voltage	V_{ba}	170 V
Grid No.2 supply voltage	V_{bg_2}	170 V
Cathode resistor	R_k	155 Ω
Anode current	I_a	10 mA
Grid No.2 current	I_{g_2}	2.8 mA
Mutual conductance	S	6.2 mA/V
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	40
Internal resistance	R_i	0.4 $M\Omega$
Input resistance at 50 MHz	r_{g_1}	10 $k\Omega$
Equivalent noise resistance	R_{eq}	1.5 $k\Omega$



Pentode section as mixer

Anode supply voltage	V_{ba}	170 V
Grid No.2 supply voltage	V_{bg_2}	170 V
Grid No.1 resistor	R_{g_1}	0.1 $M\Omega$
Cathode resistor	R_k	330 Ω
Oscillator voltage	V_{osc}	3.5 V_{RMS}
Anode current	I_a	8 mA
Grid No.2 current	I_{g_2}	2.5 mA
Grid No.1 current	I_{g_1}	12 μA
Conversion conductance	S_c	2.4 mA/V
Internal resistance	R_i	0.5 $M\Omega$



Triode as oscillator



Operation in Colpitts circuit is recommended.

Operation in Hartley circuit is not recommended.

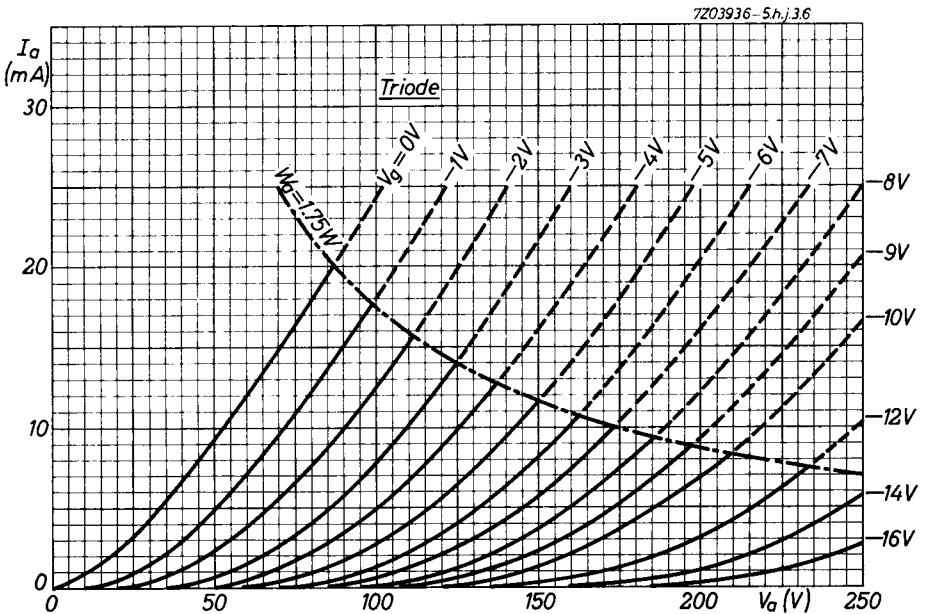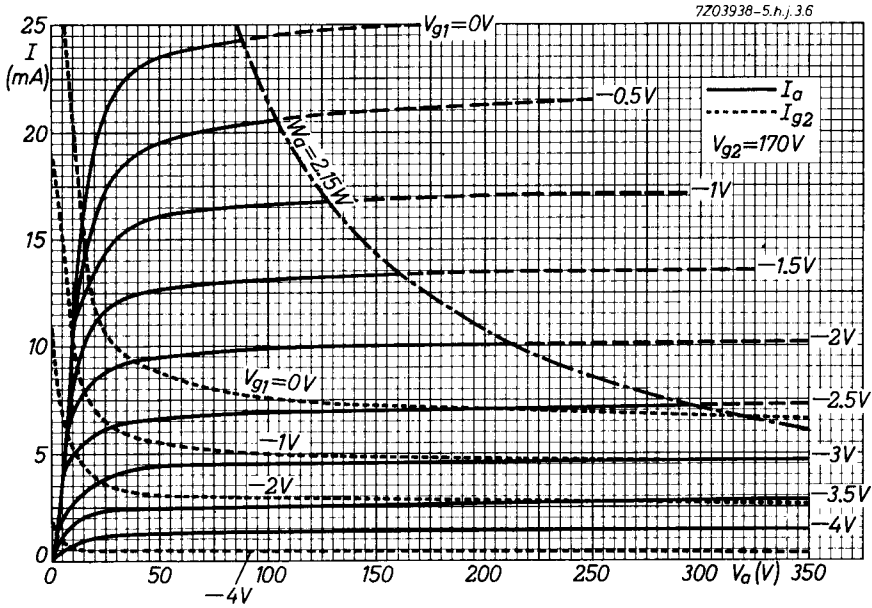


E80CF

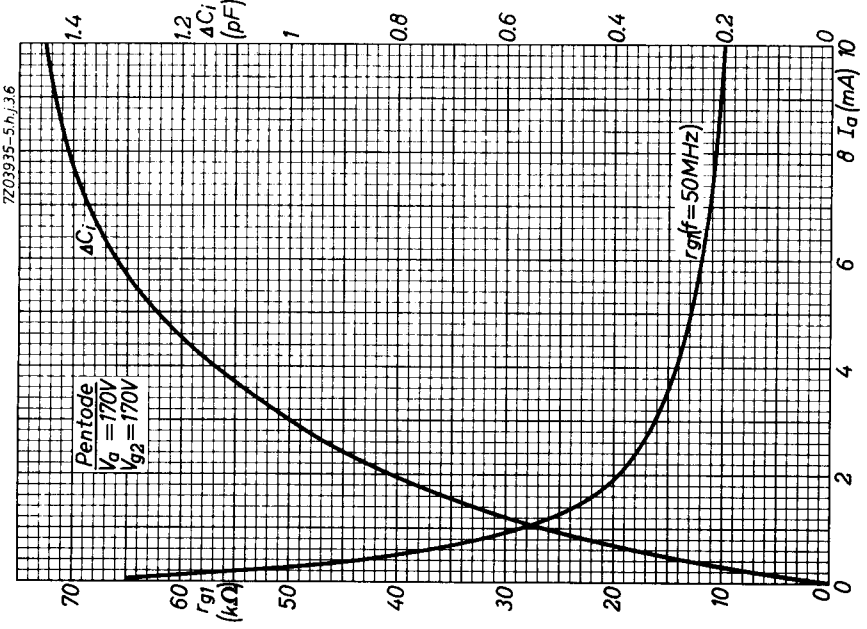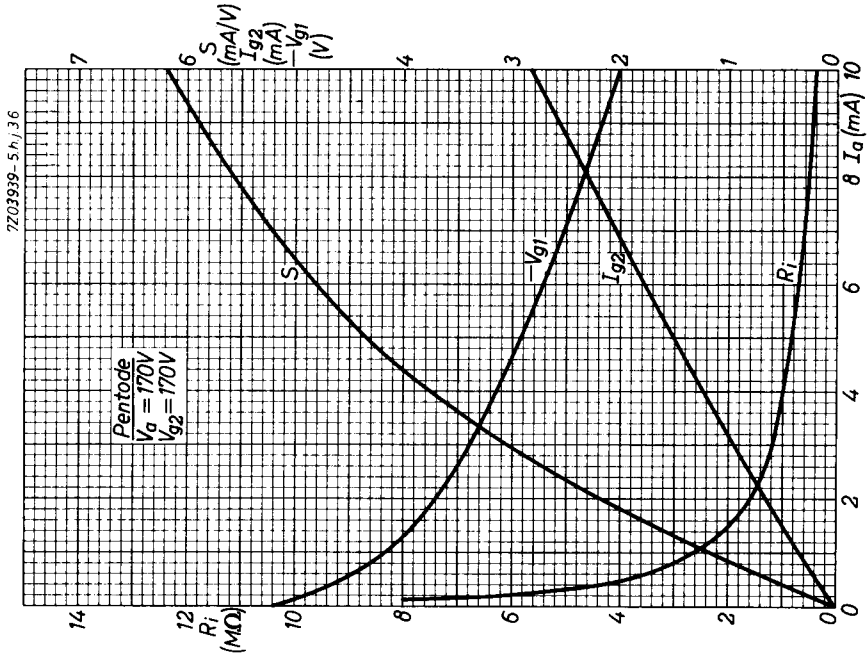

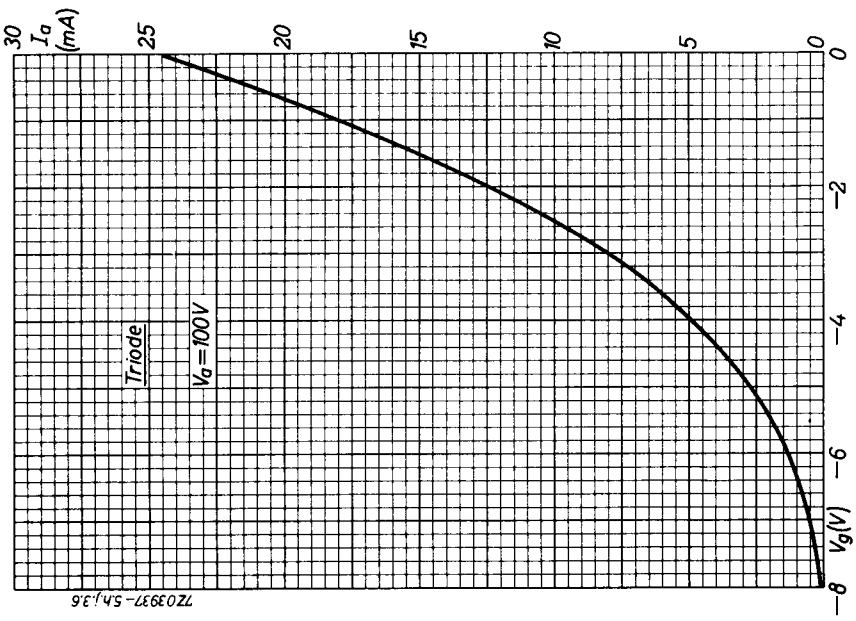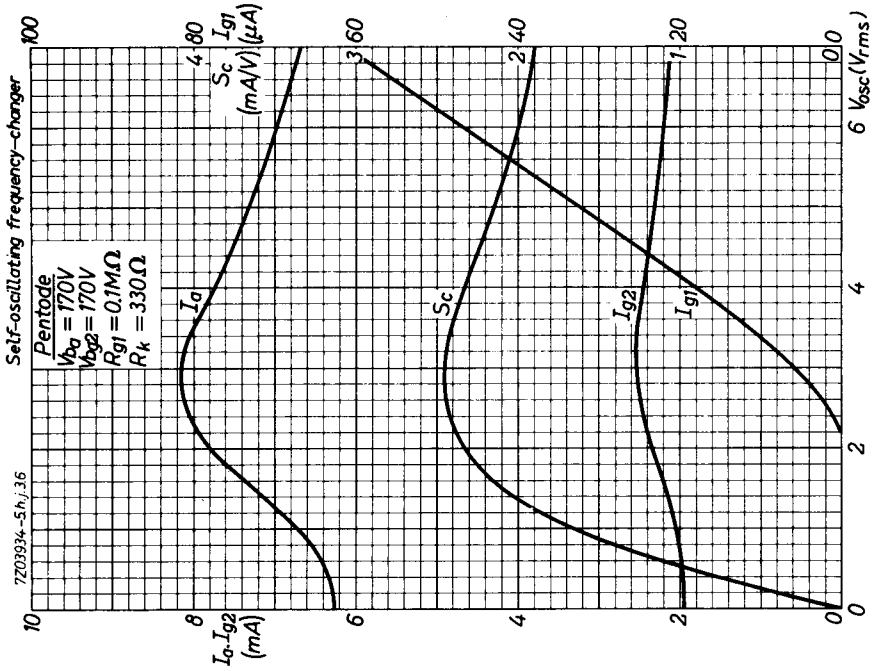

E80CF

7203940-5.h.j.36

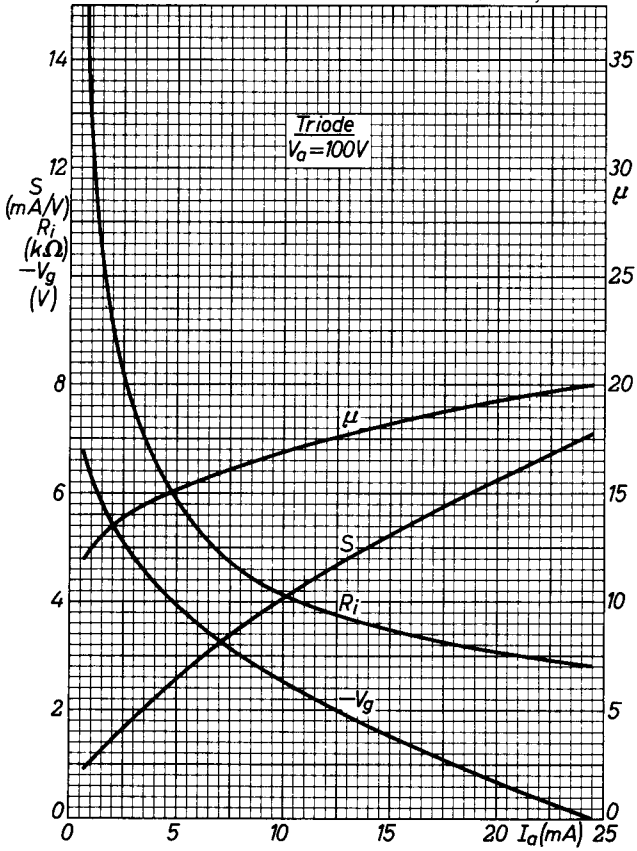

PHILIPS

Data handbook



**Electronic
components
and materials**

E80CF

page	sheet	date
1	1	1968.12
2	2	1968.12
3	3	1968.12
4	4	1968.12
5	5	1968.12
6	6	1968.12
7	7	1968.12
8	8	1968.12
9	9	1968.12
10	10	1968.12
11	FP	2000.11.11