



December 2006

# FDMS8670S

## N-Channel PowerTrench<sup>®</sup> SyncFET<sup>™</sup>

30V, 42A, 3.5mΩ

### Features

- Max  $r_{DS(on)}$  = 3.5mΩ at  $V_{GS} = 10V, I_D = 20A$
- Max  $r_{DS(on)}$  = 5.0mΩ at  $V_{GS} = 4.5V, I_D = 17A$
- Advanced Package and Silicon combination for low  $r_{DS(on)}$  and high efficiency
- SyncFET Schottky Body Diode
- MSL1 robust package design
- RoHS Compliant





### General Description

The FDMS8670S has been designed to minimize losses in power conversion application. Advancements in both silicon and package technologies have been combined to offer the lowest  $r_{DS(on)}$  while maintaining excellent switching performance. This device has the added benefit of an efficient monolithic Schottky body diode.

### Application

- Synchronous Rectifier for DC/DC Converters
- Notebook Vcore/ GPU low side switch
- Networking Point of Load low side switch
- Telecom secondary side rectification

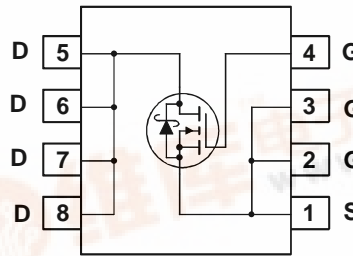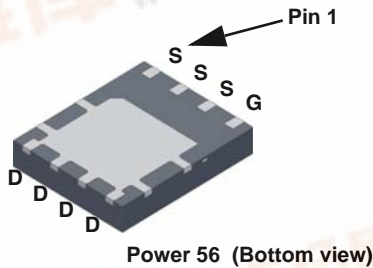

### MOSFET Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted

| Symbol         | Parameter  | Ratings     | Units            |
|----------------|--|-------------|------------------|
| $V_{DS}$       | Drain to Source Voltage  | 30          | V                |
| $V_{GS}$       | Gate to Source Voltage   | $\pm 20$    | V                |
| $I_D$          | Drain Current -Continuous (Package limited) $T_C = 25^\circ\text{C}$ | 42          | A                |
|                | -Continuous (Silicon limited) $T_C = 25^\circ\text{C}$               | 116         |                  |
|                | -Continuous $T_A = 25^\circ\text{C}$                                 | 20          |                  |
|                | -Pulsed  | 200         |                  |
| $P_D$          | Power Dissipation $T_C = 25^\circ\text{C}$                           | 78          | W                |
|                | Power Dissipation $T_A = 25^\circ\text{C}$ (Note 1a)                 | 2.5         |                  |
| $T_J, T_{STG}$ | Operating and Storage Junction Temperature Range                     | -55 to +150 | $^\circ\text{C}$ |

### Thermal Characteristics

|                 |   |     |                    |
|-----------------|---|-----|--------------------|
| $R_{\theta JC}$ | Thermal Resistance, Junction to Case              | 1.6 | $^\circ\text{C/W}$ |
| $R_{\theta JA}$ | Thermal Resistance, Junction to Ambient (Note 1a) | 50  |                    |

### Package Marking and Ordering Information

| Device Marking | Device    | Package  | Reel Size | Tape Width | Quantity   |
|----------------|-----------|----------|-----------|------------|------------|
| FDMS8670S      | FDMS8670S | Power 56 | 7"        | 12mm       | 3000 units |

FDMS8670S N-Channel PowerTrench<sup>®</sup> SyncFET<sup>™</sup>

## Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units |
|--------|-----------|-----------------|-----|-----|-----|-------|
|--------|-----------|-----------------|-----|-----|-----|-------|

### Off Characteristics

|                                      |   |  |    |    |           |                            |
|--------------------------------------|---|--|----|----|-----------|----------------------------|
| $BV_{DSS}$                           | Drain to Source Breakdown Voltage         | $I_D = 1\text{mA}, V_{GS} = 0\text{V}$                 | 30 |    |           | V                          |
| $\frac{\Delta BV_{DSS}}{\Delta T_J}$ | Breakdown Voltage Temperature Coefficient | $I_D = 50\text{mA}$ , referenced to $25^\circ\text{C}$ |    | 17 |           | $\text{mV}/^\circ\text{C}$ |
| $I_{DSS}$                            | Zero Gate Voltage Drain Current           | $V_{DS} = 24\text{V}, V_{GS} = 0\text{V}$              |    |    | 500       | $\mu\text{A}$              |
| $I_{GSS}$                            | Gate to Source Leakage Current            | $V_{GS} = \pm 20\text{V}, V_{DS} = 0\text{V}$          |    |    | $\pm 100$ | nA                         |

### On Characteristics

|  |  |  |   |      |     |                            |
|--|--|--|---|------|-----|----------------------------|
| $V_{GS(th)}$                           | Gate to Source Threshold Voltage                         | $V_{GS} = V_{DS}, I_D = 1\text{mA}$                              | 1 | 1.5  | 3   | V                          |
| $\frac{\Delta V_{GS(th)}}{\Delta T_J}$ | Gate to Source Threshold Voltage Temperature Coefficient | $I_D = 50\text{mA}$ , referenced to $25^\circ\text{C}$           |   | -2.8 |     | $\text{mV}/^\circ\text{C}$ |
| $r_{DS(on)}$                           | Drain to Source On Resistance                            | $V_{GS} = 10\text{V}, I_D = 20\text{A}$                          |   | 2.8  | 3.5 | m $\Omega$                 |
|  |  | $V_{GS} = 4.5\text{V}, I_D = 17\text{A}$                         |   | 3.6  | 5.0 |                            |
|  |  | $V_{GS} = 10\text{V}, I_D = 20\text{A}, T_J = 125^\circ\text{C}$ |   | 3.9  | 6.0 |                            |
| $g_{FS}$                               | Forward Transconductance                                 | $V_{DS} = 10\text{V}, I_D = 20\text{A}$                          |   | 98   |     | S                          |

### Dynamic Characteristics

|           |                              |  |                   |      |      |          |
|-----------|------------------------------|--|-------------------|------|------|----------|
| $C_{iss}$ | Input Capacitance            | $V_{DS} = 15\text{V}, V_{GS} = 0\text{V}$<br>$f = 1\text{MHz}$ |                   | 3005 | 4000 | pF       |
| $C_{oss}$ | Output Capacitance           |  |                   | 865  | 1150 | pF       |
| $C_{rss}$ | Reverse Transfer Capacitance |  |                   | 320  | 480  | pF       |
| $R_g$     | Gate Resistance              |  | $f = 1\text{MHz}$ | 1.4  | 5.0  | $\Omega$ |

### Switching Characteristics


|               |                               |   |   |    |    |    |    |
|---------------|-------------------------------|---|---|----|----|----|----|
| $t_{d(on)}$   | Turn-On Delay Time            | $V_{DD} = 15\text{V}, I_D = 20\text{A}$<br>$V_{GS} = 10\text{V}, R_{GEN} = 5\Omega$ |   | 14 | 26 | ns |    |
| $t_r$         | Rise Time                     |   |   | 19 | 35 | ns |    |
| $t_{d(off)}$  | Turn-Off Delay Time           |   |   | 37 | 60 | ns |    |
| $t_f$         | Fall Time                     |   |   | 10 | 20 | ns |    |
| $Q_{g(TOT)}$  | Total Gate Charge at 10V      |   | $V_{GS} = 0\text{V to } 10\text{V}$         |    | 52 | 73 | nC |
| $Q_{g(4.5V)}$ | Total Gate Charge at 4.5V     | $V_{GS} = 0\text{V to } 4.5\text{V}$  | $V_{DS} = 15\text{V}$<br>$I_D = 20\text{A}$ |    | 24 | 34 | nC |
| $Q_{gs}$      | Gate to Source Gate Charge    |   |   |    | 8  | nC |    |
| $Q_{gd}$      | Gate to Drain "Miller" Charge |   |   |    | 10 | nC |    |

### Drain-Source Diode Characteristics

|          |                                       |   |  |     |     |    |
|----------|---------------------------------------|---|--|-----|-----|----|
| $V_{SD}$ | Source to Drain Diode Forward Voltage | $V_{GS} = 0\text{V}, I_S = 2\text{A}$               |  | 0.4 | 0.7 | V  |
| $t_{rr}$ | Reverse Recovery Time                 | $I_F = 20\text{A}, di/dt = 300\text{A}/\mu\text{s}$ |  | 26  | 42  | ns |
| $Q_{rr}$ | Reverse Recovery Charge               |   |  | 24  | 39  | nC |

#### Notes:

1:  $R_{\theta JA}$  is determined with the device mounted on a  $1\text{in}^2$  pad 2 oz copper pad on a  $1.5 \times 1.5\text{in}$ . board of FR-4 material.  $R_{\theta JC}$  is guaranteed by design while  $R_{\theta CA}$  is determined by the user's board design.



a.  $50^\circ\text{C}/\text{W}$  when mounted on a  $1\text{in}^2$  pad of 2 oz copper

b.  $125^\circ\text{C}/\text{W}$  when mounted on a minimum pad of 2 oz copper



2: Pulse time <  $300\mu\text{s}$ , Duty cycle < 2%.

**Typical Characteristics**  $T_J = 25^\circ\text{C}$  unless otherwise noted

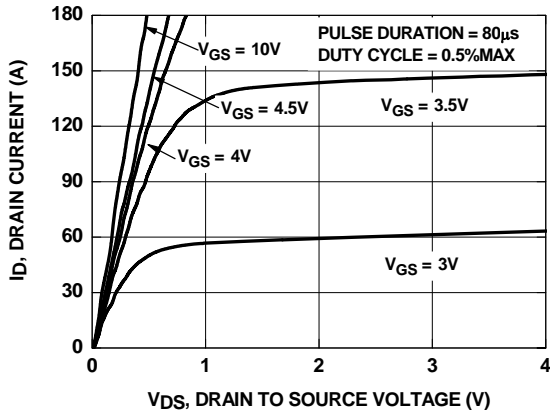


Figure 1. On Region Characteristics

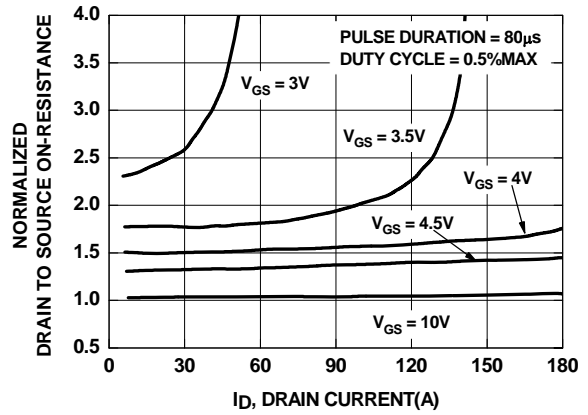


Figure 2. Normalized On-Resistance vs Drain Current and Gate Voltage

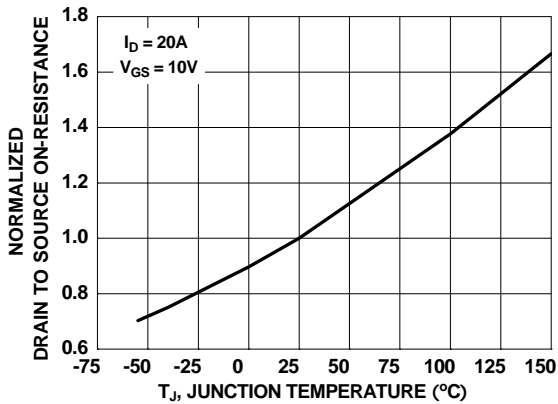


Figure 3. Normalized On Resistance vs Junction Temperature

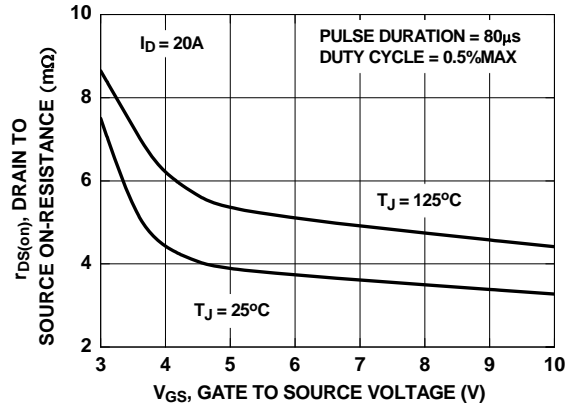


Figure 4. On-Resistance vs Gate to Source Voltage

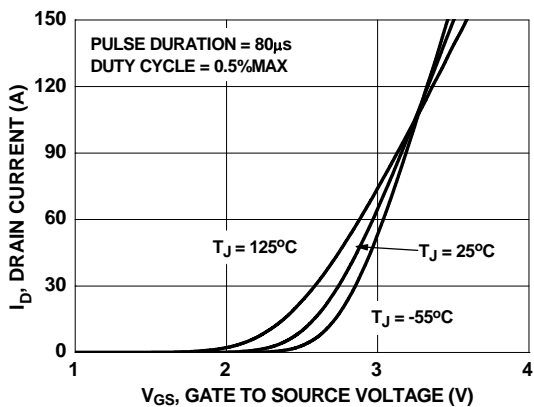


Figure 5. Transfer Characteristics

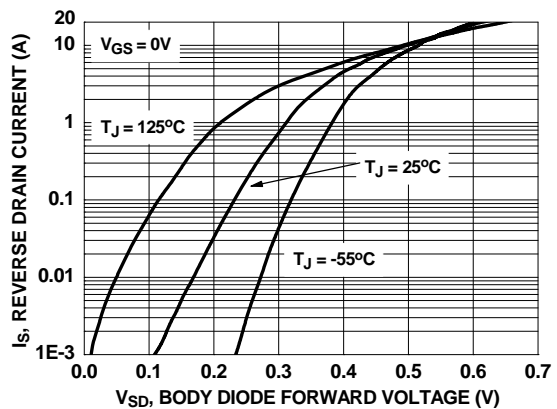


Figure 6. Source to Drain Diode Forward Voltage vs Source Current

**Typical Characteristics**  $T_J = 25^\circ\text{C}$  unless otherwise noted

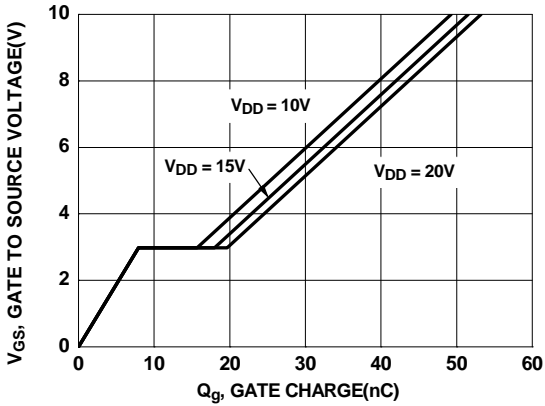


Figure 7. Gate Charge Characteristics

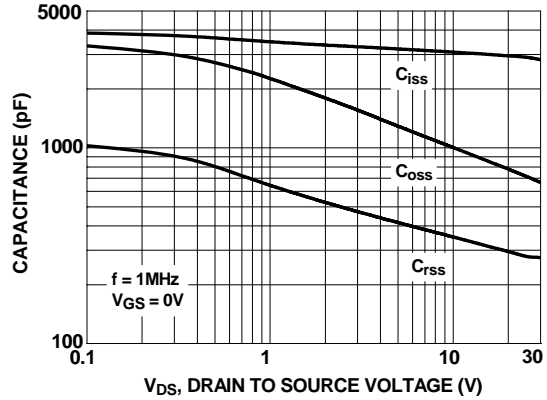


Figure 8. Capacitance vs Drain to Source Voltage

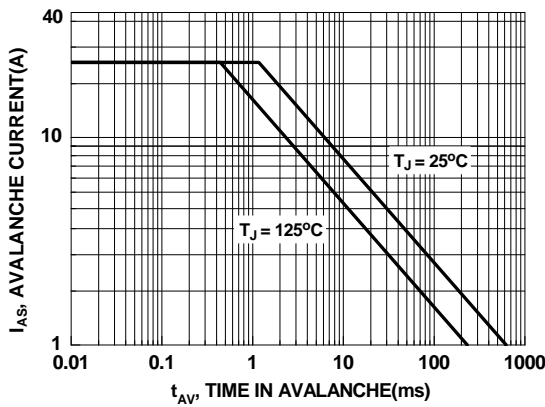


Figure 9. Unclamped Inductive Switching Capability

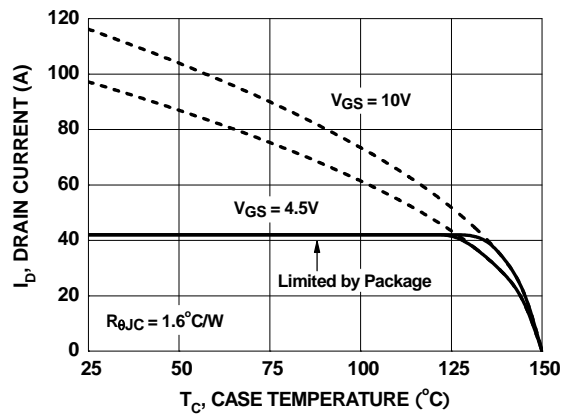


Figure 10. Maximum Continuous Drain Current vs Case Temperature

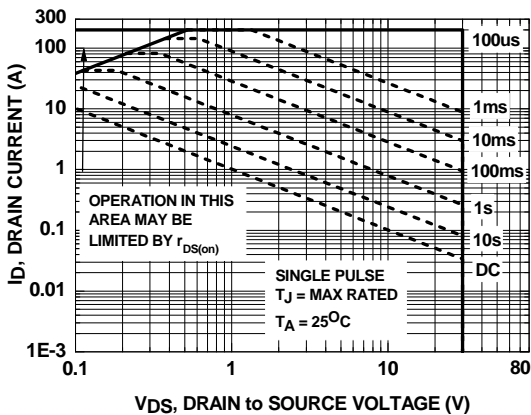


Figure 11. Forward Bias Safe Operating Area


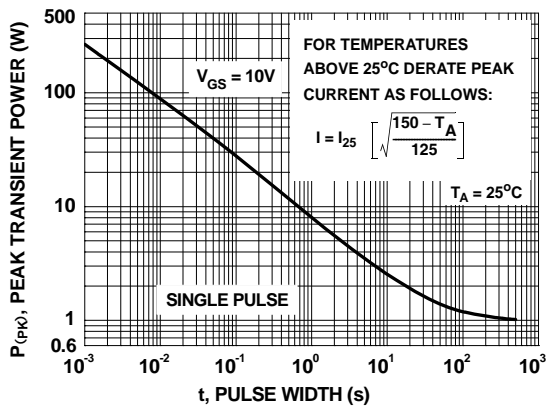


Figure 12. Single Pulse Maximum Power Dissipation

**Typical Characteristics**  $T_J = 25^\circ\text{C}$  unless otherwise noted

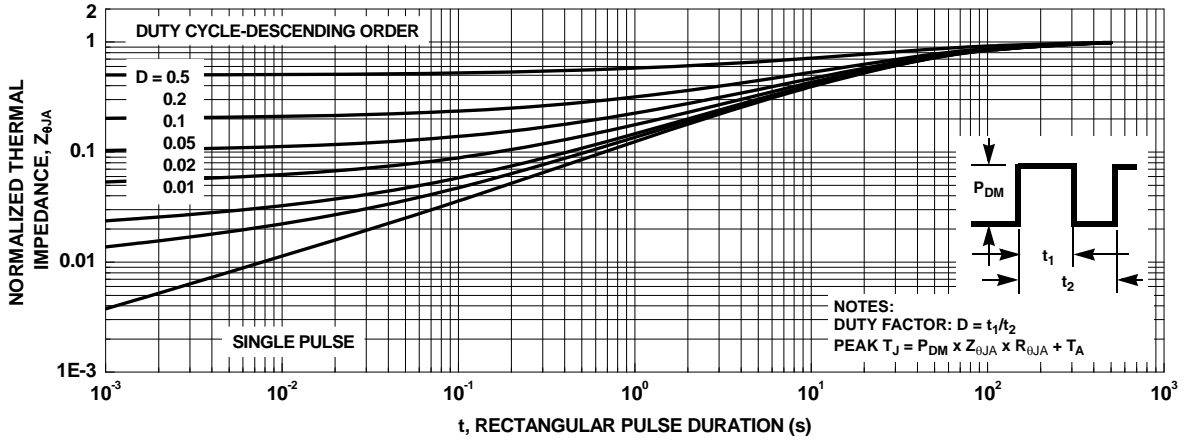


**Figure 13. Transient Thermal Response Curve**

## Typical Characteristics (continued)


### SyncFET Schottky body diode Characteristics

Fairchild's SyncFET process embeds a Schottky diode in parallel with PowerTrench MoSFET. This diode exhibits similar characteristics to a discrete external Schottky diode in parallel with a MOSFET. Figure 14 shows the reverse recovery characteristic of the FDMS8670S.


Schottky barrier diodes exhibit significant leakage at high temperature and high reverse voltage. This will increase the power in the device.

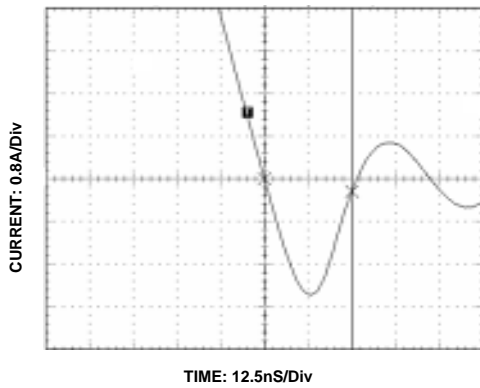

**Figure 14. FDMS8670S SyncFET Body Diode reverse recovery characteristics**

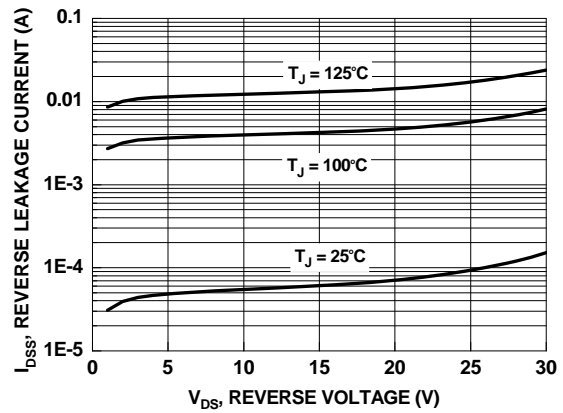

**Figure 15. SyncFET Body Diode reverse leakage vs drain to source voltage**

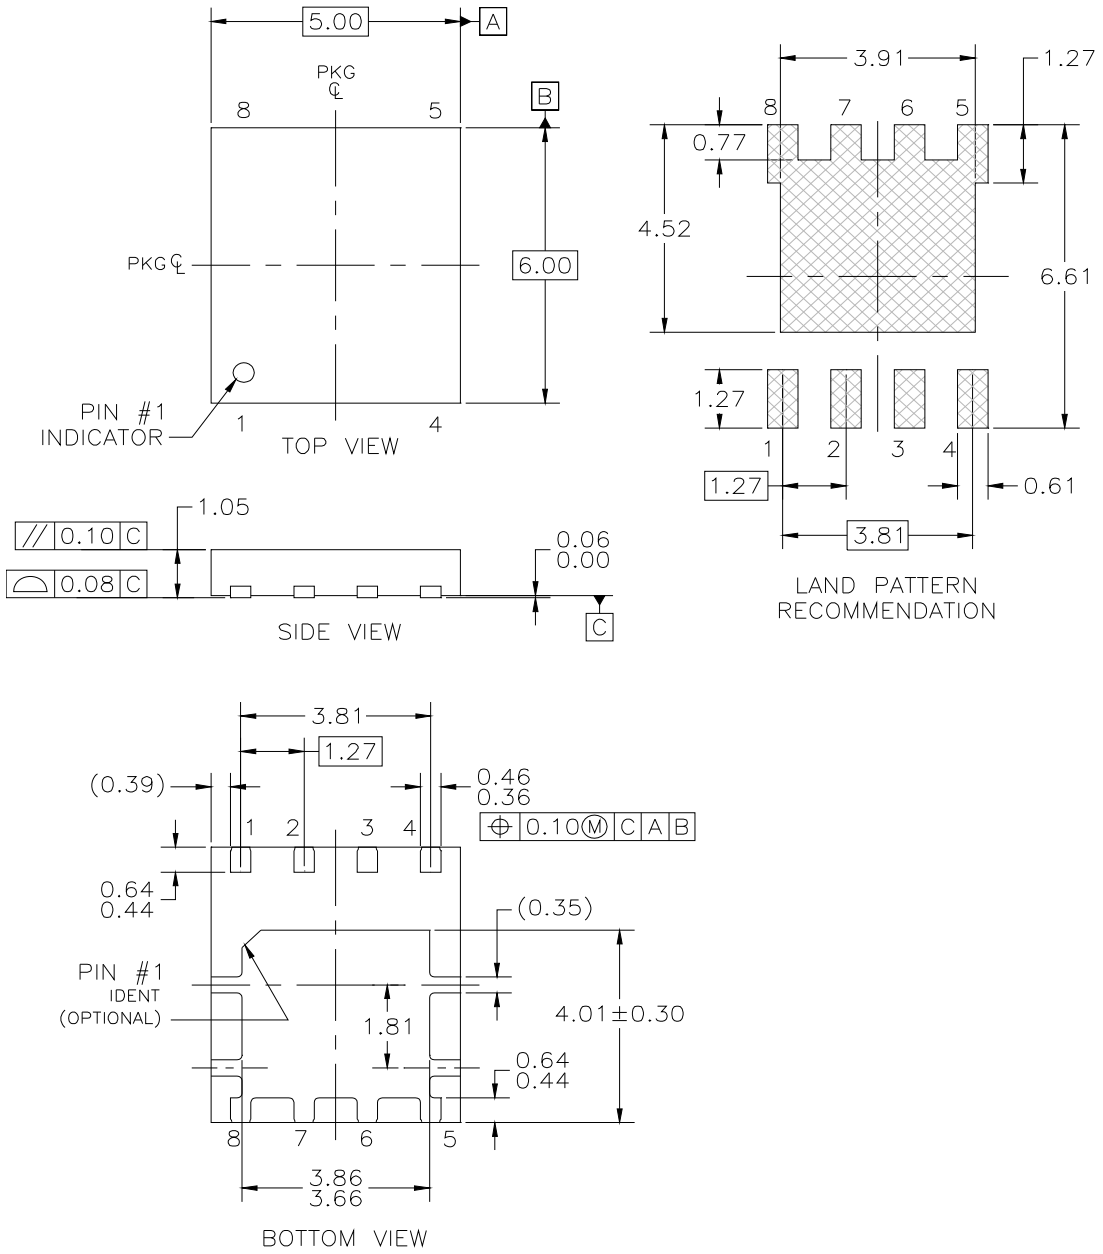

- NOTES: UNLESS OTHERWISE SPECIFIED
- A) ALL DIMENSIONS ARE IN MILLIMETERS.
  - B) NO JEDEC REFERENCE AS OF FEBRUARY 2006
  - C) DIMENSIONING AND TOLERANCING PER ASME Y14.5M 1994

PQFN08AREVA

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                                      |                     |                     |                  |         |
|--------------------------------------|---------------------|---------------------|------------------|---------|
| ACEx™                                | FACT Quiet Series™  | OCX™                | SILENT SWITCHER® | UniFET™ |
| ActiveArray™                         | GlobalOptoisolator™ | OCXPro™             | SMART START™     | VCX™    |
| Bottomless™                          | GTO™                | OPTOLOGIC®          | SPM™             | Wire™   |
| Build it Now™                        | HiSeC™              | OPTOPLANAR™         | Stealth™         |         |
| CoolFET™                             | I <sup>2</sup> C™   | PACMAN™             | SuperFET™        |         |
| CROSSVOLT™                           | i-Lo™               | POP™                | SuperSOT™-3      |         |
| DOME™                                | ImpliedDisconnect™  | Power247™           | SuperSOT™-6      |         |
| EcoSPARK™                            | IntelliMAX™         | PowerEdge™          | SuperSOT™-8      |         |
| E <sup>2</sup> CMOS™                 | ISOPLANAR™          | PowerSaver™         | SyncFET™         |         |
| EnSigna™                             | LittleFET™          | PowerTrench®        | TCM™             |         |
| FACT®                                | MICROCOUPLER™       | QFET®               | TinyBoost™       |         |
| FAST®                                | MicroFET™           | QS™                 | TinyBuck™        |         |
| FASTr™                               | MicroPak™           | QT Optoelectronics™ | TinyPWM™         |         |
| FPS™                                 | MICROWIRE™          | Quiet Series™       | TinyPower™       |         |
| FRFET™                               | MSX™                | RapidConfigure™     | TinyLogic®       |         |
|                                      | MSXPro™             | RapidConnect™       | TINYOPTO™        |         |
| Across the board. Around the world.™ |                     | µSerDes™            | TruTranslation™  |         |
| The Power Franchise®                 |                     | ScalarPump™         | UHC®             |         |
| Programmable Active Droop™           |                     |                     |                  |         |

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### PRODUCT STATUS DEFINITIONS

#### Definition of Terms

| Datasheet Identification | Product Status         | Definition  |
|--------------------------|------------------------|---|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.  |
| Preliminary              | First Production       | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.   |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.   |