




# Anaren

**G150N50W4B**

The left plot shows the radiation pattern in dBS versus frequency  $F$  [GHz]. The y-axis ranges from -50.00 to -10.00 dBS, and the x-axis ranges from 0.00 to 3.00 GHz. The curve shows a broad peak around 1.2 GHz and a smaller peak around 2.0 GHz.

The right plot shows the radiation pattern in dBS versus angle  $\theta$  [deg]. The y-axis ranges from -180 to 180 degrees, and the x-axis ranges from 1.0 to 0.0 to 1.0 GHz. The plot shows a main lobe centered at 0 degrees and side lobes at approximately  $\pm 45$  degrees.

### Mounting Footprint and Procedure:

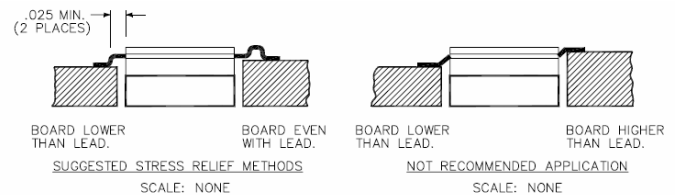

1. MAKE SURE THAT THE DEVICES ARE MOUNTED ON FLAT SURFACES (.001" UNDER THE DEVICE) TO OPTIMIZE THE HEAT TRANSFER.
2. DRILL & TAP THE HEATSINK FOR THE APPROPRIATE THREAD SIZE TO BE USED.
3. COAT HEATSINK WITH A MINIMUM AMOUNT OF HIGH QUALITY SILICONE GREASE (.001" MAX. THICKNESS).
4. POSITION DEVICE ON MOUNTING SURFACE & SECURE USING SOCKET HEAD SCREWS, FLAT & SPLIT WASHER. TORQUE SCREWS TO THE APPROPRIATE VALUE. MAKE SURE THAT THE DEVICE IS FLAT AGAINST THE HEATSINK. (CARE SHOULD BE TAKEN TO AVOID UPWARD PRESSURE OF THE LEADS TOWARDS THE LID).
5. SOLDER LEADS IN PLACE USING LEAD FREE TYPE SOLDER WITH A CONTROLLED TEMPERATURE IRON