

Ceramic

查询HFCN-3800D+供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货

High Pass Filter

50Ω 4250 to 10000 MHz

HFCN-3800+ HFCN-3800



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	7W max. at 25°C




*Passband rating, derate linearly to 3W at 100°C ambient.

Pin Connections

RF IN	1**
RF OUT	3**
GROUND	2,4,5,6

**RF IN & RF OUT can be interchanged


Outline Drawing

Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	wt.
.126	.063	.035	.024	.022	.012	.039	.042	.024	.123	grams
3.20	1.60	0.89	0.61	0.56	0.30	0.99	1.07	0.61	3.12	.02

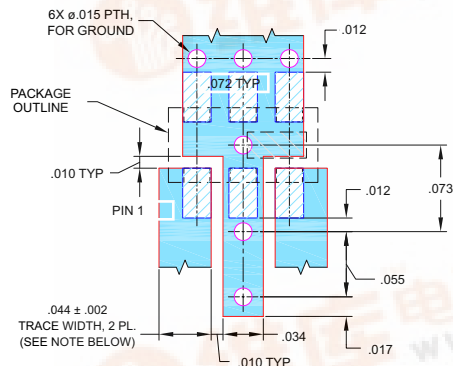Demo Board MCL P/N: TB-285 Suggested PCB Layout(PL-158)



NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- Low Cost
- Small size
- 5 sections
- Temperature stable
- Excellent power handling, 7W
- DC block in/out, breakdown voltage, 1kV typ.
- Hermetically sealed
- Patent pending

Application

- Sub-harmonic rejection and DC blocking
- Transmitters/Receivers

CASE STYLE: FV1206-1

Model	Price	Qty.
HFCN-3800+	\$2.49	(10-49)
HFCN-3800	\$2.49	(10-49)
HFCN-3800D+	\$2.99	(10-49)
HFCN-3800D	\$2.99	(10-49)


+ RoHS compliant in accordance
with EU Directive (2002/95/EC)The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

High Pass Filter Electrical Specifications¹ (T_{AMB} = 25°C)


STOPBAND (MHz)	fco, MHz	PASSBAND (MHz)	VSWR	POWER	NO. OF
(Loss>30dB) (Loss>20dB)	Nom.	(Loss<1.5dB) (Loss<2dB)	Typ.	INPUT	SECTIONS
Typ. Min.	Typ.	Max.	Stopband Frequency (MHz)	(W)	
DC-F1 DC-F2	F3	F4-F5	1.5:1	Max.	
DC-3100 DC-3200	3800	4500-9000 4250-10000	20:1 3950-10000	7	5

1. For Applications requiring DC voltage to be applied to the input or output, use HFCN-3800D (DC Resistance to ground is 100 Mohms min.)

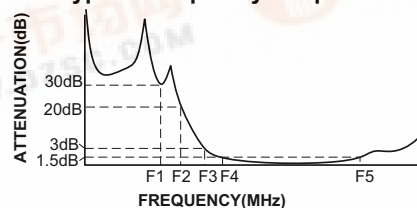Typical Frequency Response





Electrical Schematic

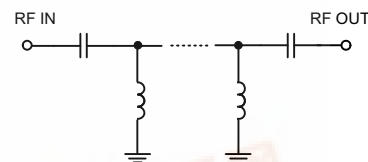

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	54.14	1737.18
500	37.58	1737.18
1500	32.52	108.58
3100	33.38	31.60
3200	36.68	28.03
3400	19.19	18.90
3550	10.63	9.33
3800	2.59	2.00
3950	1.41	1.16
4250	1.14	1.45
4500	1.02	1.43
7000	0.72	1.22
9000	0.68	1.28
10000	1.13	1.70
11330	2.71	1.96
12000	3.15	1.70

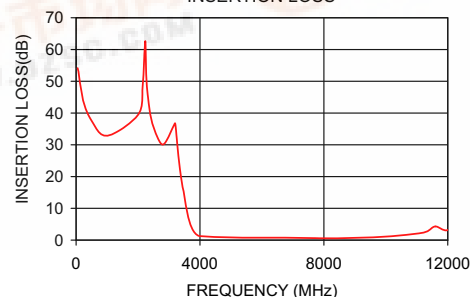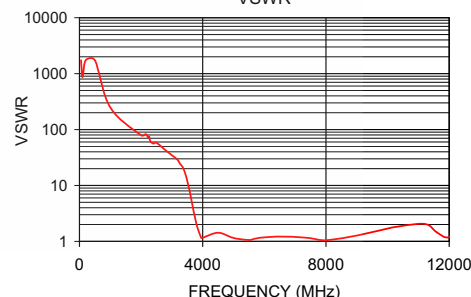HFCN-3800
INSERTION LOSSHFCN-3800
VSWR

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

REV. A
M101678
EDR-6982/4
HFCN-3800

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site