

**M3 SERIES**

**P10MU-XXXXE 3KV ISOLATED 2W UNREGULATED SINGLE OUTPUT DIP14**

**Available Inputs:**

5, 12, 24 and 48 VDC

**Available Outputs:**

5, 7.2, 12 and 15 VDC

Other specifications please enquire

**Electrical Specifications**

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

**Input Specifications**

Voltage range +/- 10 %  
Filter Capacitors

**Isolation Specifications**

Rated voltage 3000 VDC  
Leakage current 1 mA  
Resistance 10<sup>9</sup> Ohm  
Capacitance 60 pF typ.

**Output Specifications**

Voltage accuracy +/- 5 %, max.  
Ripple and noise (at 20 MHz BW) 75 mV p-p, max.  
Short circuit protection Momentary  
Line voltage regulation +/- 1,2 % / 1,0 % of Vin  
Load voltage regulation +/- 8 %, load = 20 ~ 100 %  
Temperature coefficient +/- 0,02 % / °C

**General Specifications**

Efficiency 70 % to 85 %  
Switching frequency 85 KHz, typ.

**Environmental Specifications**

Operating temperature (ambient) - 40° C to + 85° C  
Storage temperature - 55° C to + 125° C  
Derating See graph  
Humidity Up to 90 %, non condensing  
Cooling Free air convection

**Physical Characteristics**


Dimensions DIP 20.32 x 10.16 x 6.85 mm  
0.80 x 0.40 x 0.27 inches  
Weight 2,5 g 3,5 g for 48 VDC  
Case material Non conductive black plastic

**Examples of Partnumbers/Modelcode**


PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P10MU-0505E	5	28	555	5	400	72
P10MU-0512E	5	28	500	12	167	80
P10MU-1205E	12	22	228	5	400	73
P10MU-1212E	12	20	208	12	167	80
P10MU-2405E	24	10	113	5	400	74
P10MU-2412E	24	9	101	12	167	82



**Dimensions**

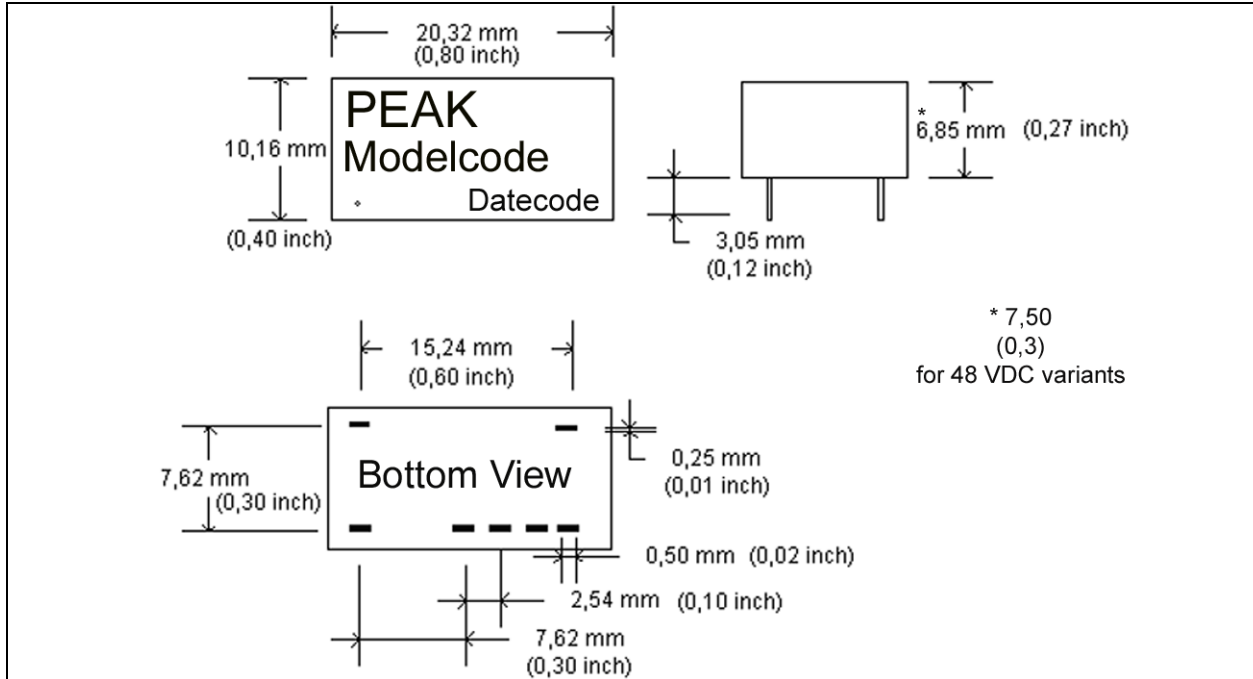

**Derating Graph and Pinning**

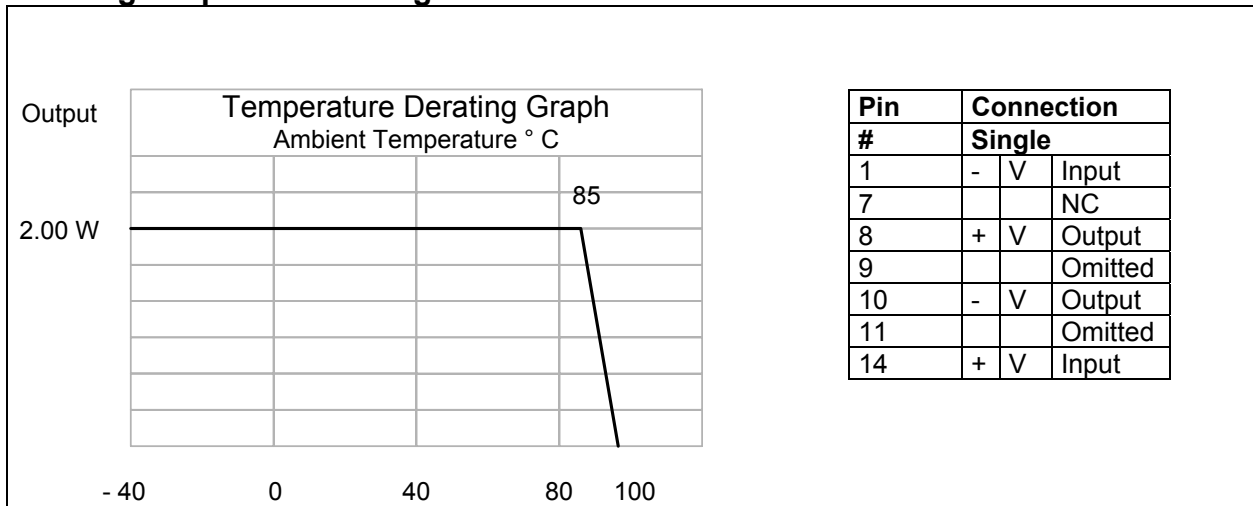

Specification can be changed without notice.

Copyright PEAK electronics GmbH