

[查询FSLF-S090JR供应商](#)

[捷多邦, 专业PCB打样工厂, 24小时加急出货](#)

2012 Size

Chip Multilayer Diplexer
for CELL / GPS

FSLF-S090JR




All the technical data and information contained herein are subject to change without notice.



LF-FSLF-S090JR-0406A







Shape & Size

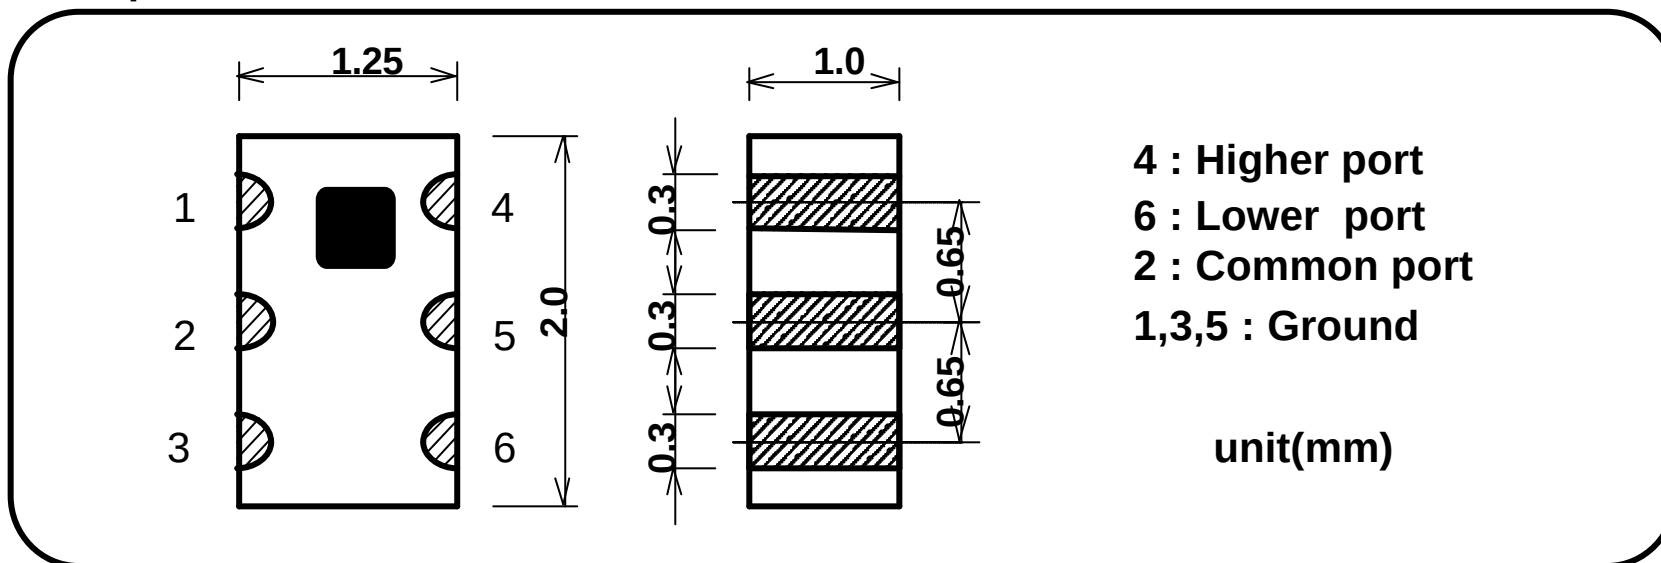


Specifications

Frequency Range	f1:824-894MHz	Attenuation in f2 Lower <=>Common	17dB Min.
	f2:1575.42MHz +/- 1MHz		
Insertion Loss in f1 Lower<=>Common	0.5dB Max.(at 25deg.C) 0.55dB Max.(at -35 ~ +85deg.C)	Attenuation in f1 Higher <=>Common	17dB Min.
Insertion Loss in f2 Higher<=>Common	0.6dB Max.(at 25deg.C) 0.65dB Max.(at -35 ~ +85deg.C)	Power Capacity	1W Max.
		Temperature Range	-35to+85deg
Return Loss (all port)	10dB Min.		

FSLF-S090JR SAMPLE DATA

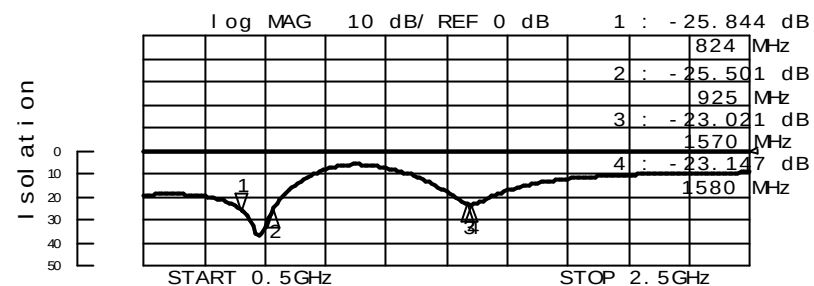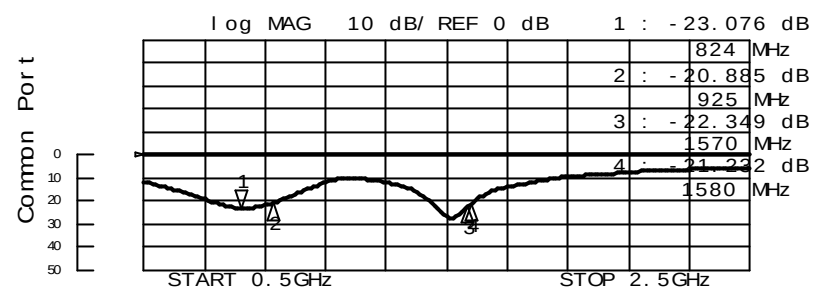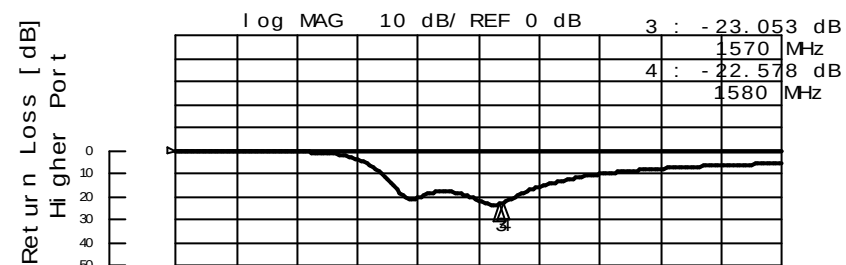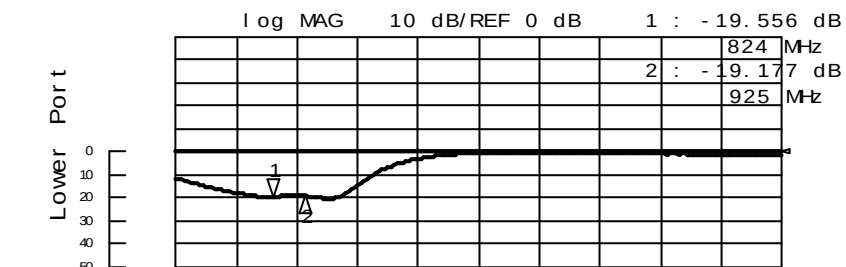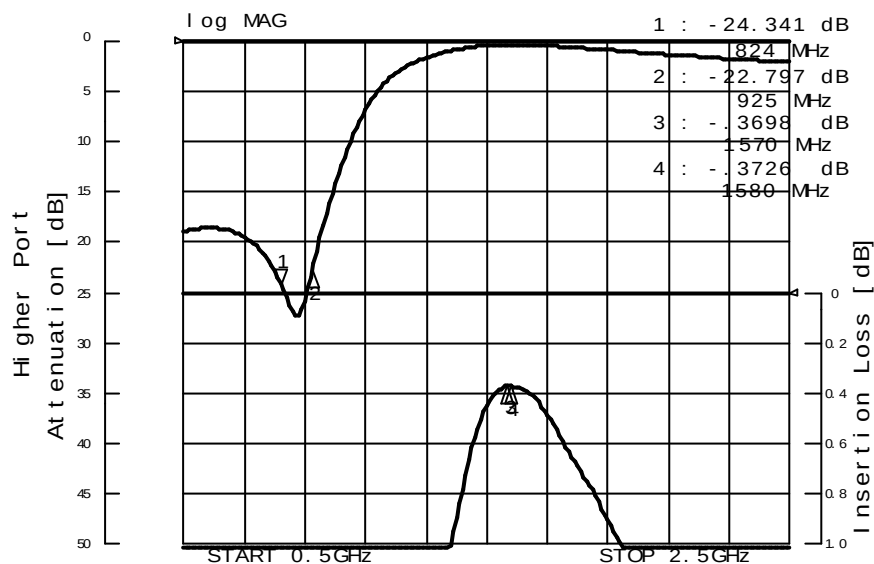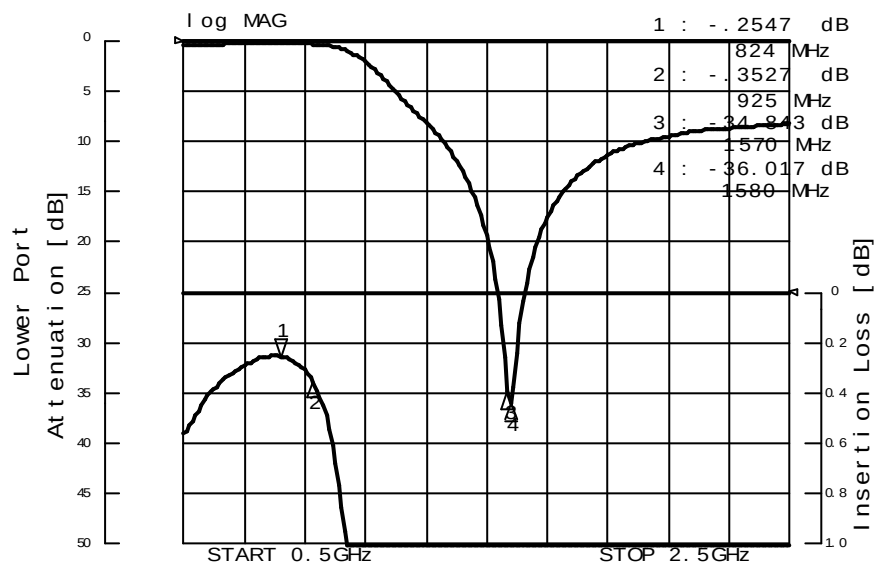

Foot Pattern

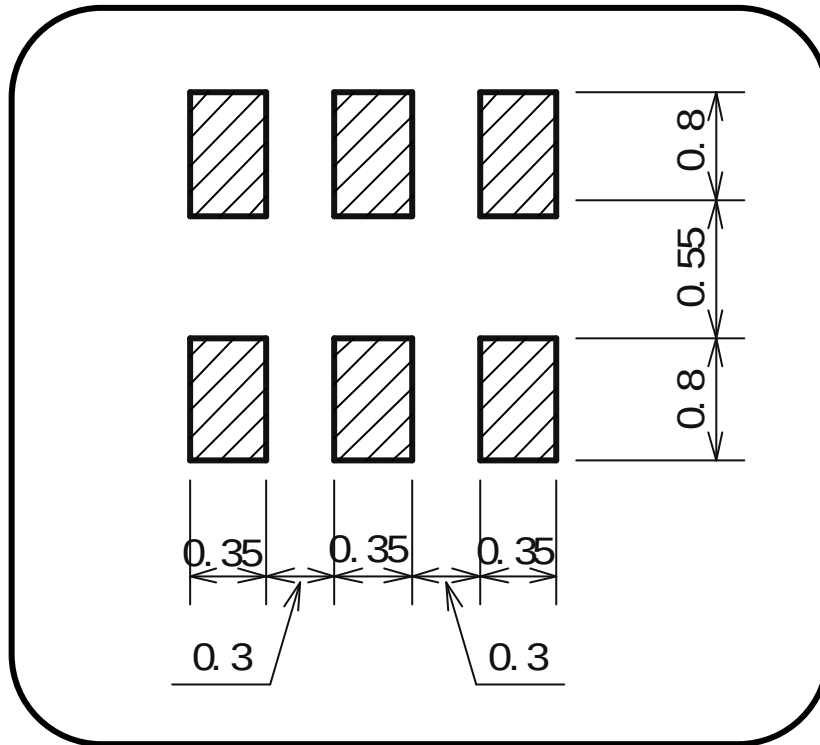

Foot Pattern Example

