

VCXO Voltage Controlled Oscillator


ECV20 Series

- 60kHz to 120.0MHz
- Low Cost
- Fast Delivery
- Custom Options Available



Parameter	ECV20A	ECV20F	ECV20H	ECV20T
Frequency Range	12.0MHz to 120.0MHz	12.0MHz to 75.00MHz	60.0kHz to 50.00MHz	60.0kHz to 50.0MHz
Supply Voltage	+5Vdc +/- 5%			
Supply Current (max)	50mA	40mA	20mA	30mA
Stability	+/-50ppm			
Operating Temp	-10°C to +70°C			
Storage Temp	-25°C to +100°C			
Symmetry	55/45	60/40	55/45	60/40
Control Voltage	0.5Vdc to 5.0Vdc			
Pulling Range	+/- 200ppm (A) +/- 250ppm (B) +/- 300ppm (C)			
Output	ACMOS	FTTL	HCMOS	LSTTL
Rise & Fall Times (max)	5nS	6nS	10nS	10nS

Environmental & Mechanical	
Shock	MIL-STD-202 30G 11ms
Vibration	MIL-STD-202 5G to 2000Hz
Soldering Condition	Lead Temperature 260°C 10s max

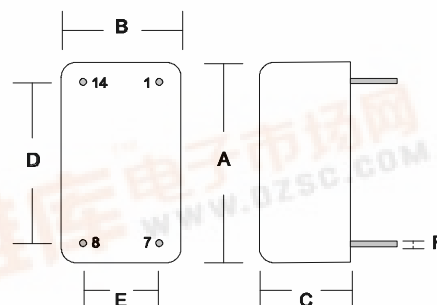

Pin	1	7	8	14
Function	Vc	0V	Output	VDD

A	B	C	D	E	F
25.00	15.00	10.00	15.24	7.62	0.50

Part Numbering: ECV20 A 20.00 A X
 Type _____
 Output _____
 A = ACMOS F= FTTL
 H= HCMOS T= LSTTL
 Frequency _____
 Pulling Range _____
 A=200ppm B=250ppm C=300ppm
 Supply Voltage _____
 X = 5V

Dimensions in mm