

TOSHIBA CMOS Digital Integrated Circuit Silicon Monolithic


TC9243APG, TC9243AFG

Infrared Remote-Control Signal Transmission LSI

The TC9243APG and TC9243AFG are infrared remote-control signal transmission LSIs suitable for remote control of audio systems, TVs, VTRs, CD players, etc.


Features

- Wide range of operating supply voltages, enabling low-voltage operation:
 $V_{DD} = 2.0$ to 4.0 V
- Thirty-two (32) basic functions are available.
 Support of multiple keying enables up to 112 instructions (28×4) to be output.
- Interference with other equipment can be prevented because seven (7) bits out of eight (8) bits of system code are presettable.
- Equipped with transmission display output pin.
- Low current dissipation: $I_{QD} \leq 1 \mu A$ (during standby)
- Two types of package, DIP and flat type, are available:
 DIP20: TC9243APG
 SOP20: TC9243AFG

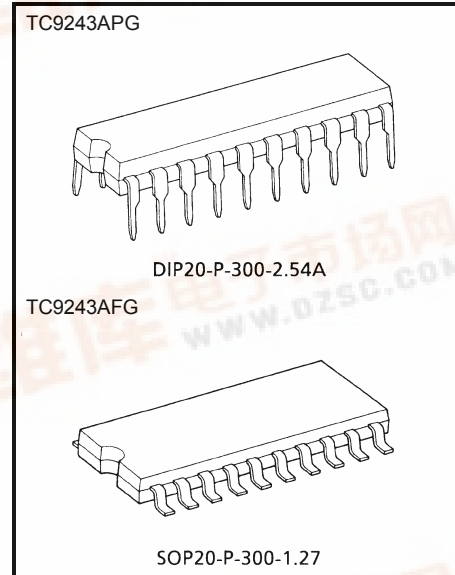


Weight
 DIP20-P-300-2.54A: 1.4 g (typ.)
 SOP20-P-300-1.27: 0.48 g (typ.)

Pin Assignment

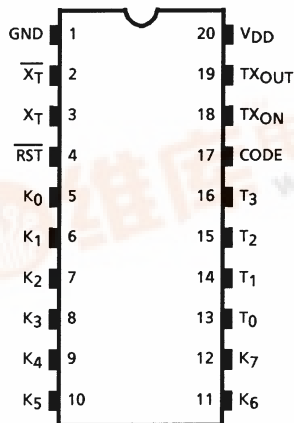

Block Diagram

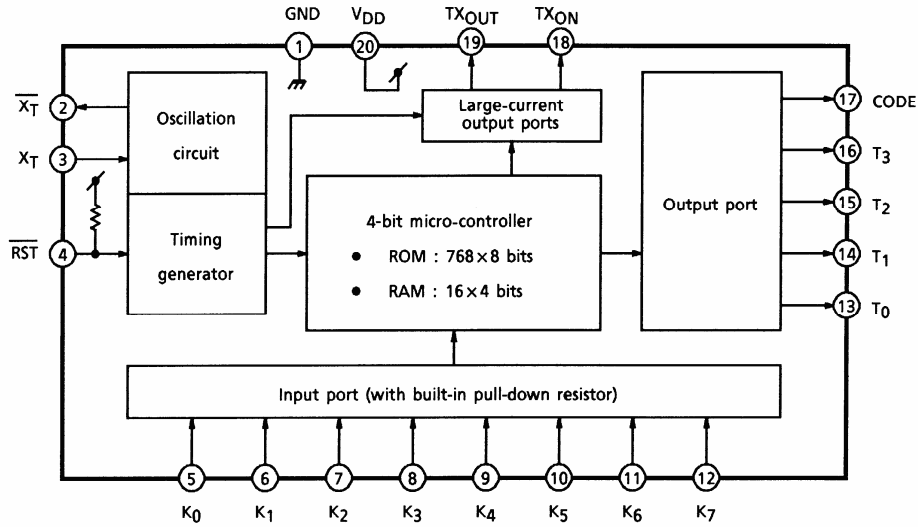


Pin Function

Pin No.	Symbol	Pin Name	Function and Operation
1	GND	Power Terminal	For applying the supply voltage ($V_{DD} = 2.0$ to 4.0 V)
20	V_{DD}		
2	$\overline{X_T}$	Oscillator Terminal	Input/output terminals for the ceramic oscillators, with built-in amplifier circuit and feedback resistor
3	X_T		
4	\overline{RST}	Reset Input	When this pin is set at "L" level, the inside is initialized. Equipped with a built-in pull-up resistor.
5~12	$K_0 \sim K_7$	Key Inputs	Input terminals for the key matrix. Each pin has a built-in pull-down resistor.
13~16	$T_0 \sim T_3$	Key Scan Output	Key matrix scan output terminals. CMOS output.
17	CODE	Code Scan Output	Scan output terminals for code setting. P-ch open drain output.
18	TX_{ON}	Transmission Display Output	Transmission display LED driving output terminal
19	TX_{OUT}	Transmission Output	Infrared LED driving output terminal

Operations


1. Key Matrix

The TC9243APG and TC9243AFG enable the setting of a maximum of thirty-two (32) keys through combining the “K₀~K₇” and “T₀~T₃” keys. Furthermore, System Codes are settable in seven (7) bits through combining the “K₀~K₆” and “CODE” keys.

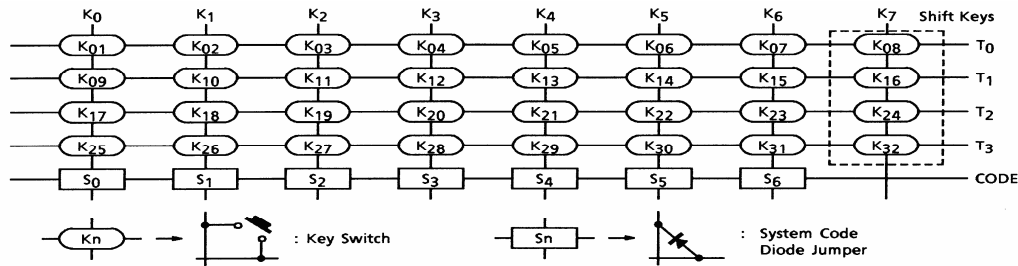


- The keys “K₀₈”, “16”, “24” and “32” (the shift keys) can be pushed simultaneously with other keys (the normal keys). However, the simultaneous keying of either shift keys or normal keys is prohibited.
- The system code setting is done through the use of the diode jumper between the “CODE” lines and the “K₀~K₆” lines. With the diode jumper, the data code will become “1”. However, if the setting of the “CODE” and “K₀~K₆” keys is only at one point, the keys are connectable directly without using the diode jumper. Furthermore, the “S₇” key is fixed at “1” and cannot be changed.

2. Data Format

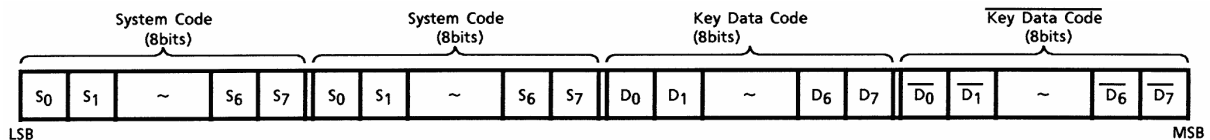

Note 1: “80H~8FH” out of the system codes are free codes.

Although freely available in principle, these codes may already be used by other equipment. There is, therefore, a risk of interference occurring.



Other system codes have been customized and their general use is therefore prohibited. Toshiba will assume no responsibility for interference and other problems that may result from the use of other system codes.


3. Key Data Code

Key No.	Tn	Kn	D ₀	D ₁	D ₂	D ₃	D ₄	D ₅	D ₆	D ₇
K ₀₁	T ₀	K ₀	1	0	0	0	0	<ul style="list-style-type: none"> Shift-key data "000" except dual keying 		
K ₀₂		K ₁	0	1	0	0	0			
K ₀₃		K ₂	1	1	0	0	0			
K ₀₄		K ₃	0	0	1	0	0			
K ₀₅		K ₄	1	0	1	0	0			
K ₀₆		K ₅	0	1	1	0	0			
K ₀₇		K ₆	1	1	1	0	0			
K ₀₈		K ₇	<ul style="list-style-type: none"> Normal-key data "00000" except dual keying. 					1	0	0
K ₀₉	T ₁	K ₀	1	0	0	1	0	<ul style="list-style-type: none"> Shift-key data "000" except dual keying 		
K ₁₀		K ₁	0	1	0	1	0			
K ₁₁		K ₂	1	1	0	1	0			
K ₁₂		K ₃	0	0	1	1	0			
K ₁₃		K ₄	1	0	1	1	0			
K ₁₄		K ₅	0	1	1	1	0			
K ₁₅		K ₆	1	1	1	1	0			
K ₁₆		K ₇	<ul style="list-style-type: none"> Normal-key data "00000" except dual keying. 					1	1	0
K ₁₇	T ₂	K ₀	1	0	0	0	1	<ul style="list-style-type: none"> Shift-key data "000" except dual keying 		
K ₁₈		K ₁	0	1	0	0	1			
K ₁₉		K ₂	1	1	0	0	1			
K ₂₀		K ₃	0	0	1	0	1			
K ₂₁		K ₄	1	0	1	0	1			
K ₂₂		K ₅	0	1	1	0	1			
K ₂₃		K ₆	1	1	1	0	1			
K ₂₄		K ₇	<ul style="list-style-type: none"> Normal-key data "00000" except dual keying. 					1	0	1
K ₂₅	T ₃	K ₀	1	0	0	1	1	<ul style="list-style-type: none"> Shift-key data "000" except dual keying 		
K ₂₆		K ₁	0	1	0	1	1			
K ₂₇		K ₂	1	1	0	1	1			
K ₂₈		K ₃	0	0	1	1	1			
K ₂₉		K ₄	1	0	1	1	1			
K ₃₀		K ₅	0	1	1	1	1			
K ₃₁		K ₆	1	1	1	1	1			
K ₃₂		K ₇	<ul style="list-style-type: none"> Normal-key data "00000" except dual keying. 					1	1	1

- Normal keys: K₀₁~K₀₇, K₀₉~K₁₅, K₁₇~K₂₃, K₂₅~K₃₁
- Shift keys: K₀₈, K₁₆, K₂₄, K₃₂


4. TX_{OUT} Output Waveform

Key ON

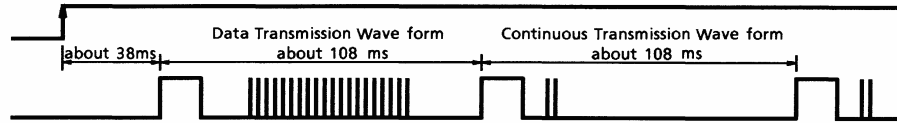


Note 2: In case of $f_{OSC} = 455 \text{ kHz}$


Data Transmission Waveform

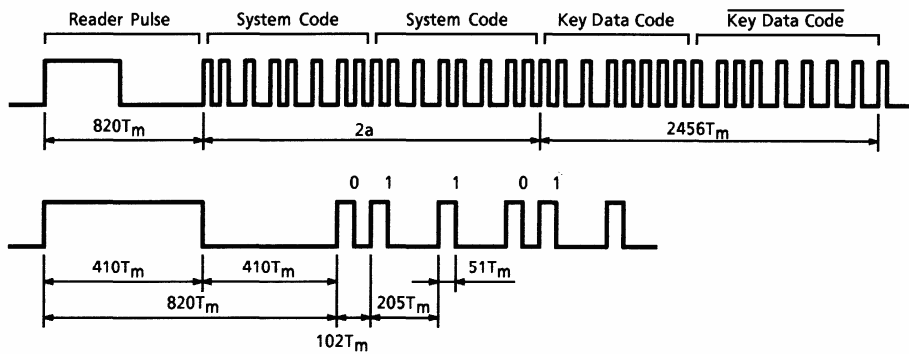

Continuous Transmission Waveform

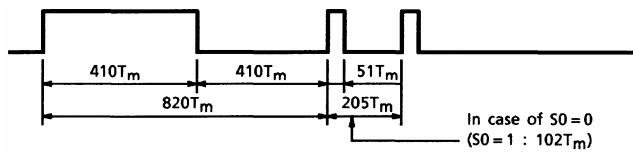

Carrier Waveform

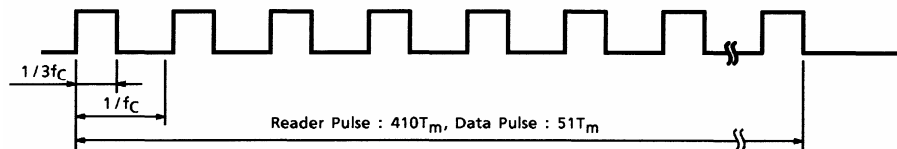

$T_m = 5/f_{OSC}$: system clock

a: system code output time

$f_c = f_{OSC}/12$

When the oscillation frequency is 455 kHz, the signal is output after being pulse-modulated by 37.9 kHz at a duty ratio of 1/3, in 1/12 division, by the carrier generation circuit.

Caution

- In preparing receiving software, strictly adhere to the following instructions:
- In the case of system codes, the same code is transmitted twice. Therefore always decode these two codes and determine whether they agree with each other.
 - In the case of key data codes, always decode the key data code and its reversed code and determine whether they agree with each other.

Maximum Ratings (Ta = 25°C)

Characteristic	Symbol	Rating	Unit
Supply voltage	V _{DD}	-0.3~5.0	V
Input voltage	V _{IN}	V _{SS} - 0.3~V _{DD} + 0.3	V
Output current	I _{OUT}	-20	mA
Power dissipation	P _D	350 (300) (Note 3)	mW
Operating temperature	T _{opr}	-20~75	°C
Storage temperature	T _{stg}	-40~125	°C

Note 3: The value shown in parentheses applies to the TC9243FG.

Electrical Characteristics

Recommended Operating Conditions


(unless otherwise specified, V_{DD} = 3.0 V, Ta = 25°C; for items with an asterisk (*), Ta = -25~75°C)

Characteristic		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Operating supply voltage		* V _{DD}	—	—	2.0	—	4.0	V
Oscillation frequency		* f _{OSC}	—	—	400	—	800	kHz
Input voltage	"H" level	V _{IH1}	—	(Except \overline{RST})	V _{DD} × 0.7	—	V _{DD}	V
	"L" level	V _{IL1}	—	(Except \overline{RST})	0	—	V _{DD} × 0.3	
Input voltage	"H" level	V _{IH2}	—	(\overline{RST})	V _{DD} × 0.8	—	V _{DD}	V
	"L" level	V _{IL2}	—	(\overline{RST})	0	—	V _{DD} × 0.2	


DC Characteristics (unless otherwise specified, V_{DD} = 3.0 V, Ta = 25°C)

Characteristic		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Operating supply current		I _{DD}	—	f _{OSC} = 455 kHz	—	—	1.0	mA
Static supply current		I _{QD}	—	During "Hold"	—	—	1.0	μA
Pull-down resistor		R _D	—	(K ₀ ~K ₇)	100	—	400	kΩ
Pull-up resistor		R _U	—	(\overline{RST})	25	—	100	kΩ
Output current	"H" level	I _{OH}	—	(TX _{OUT}) V _{OH} = 1.5 V	-10	—	—	mA
	"L" level	I _{OL}	—	(TX _{ON}) V _{OL} = 1.5 V	5	—	—	
Input leak current		I _{LI}	—	V _{IN} = V _{DD} , V _{SS}	-1.0	—	1.0	μA

Application Circuit

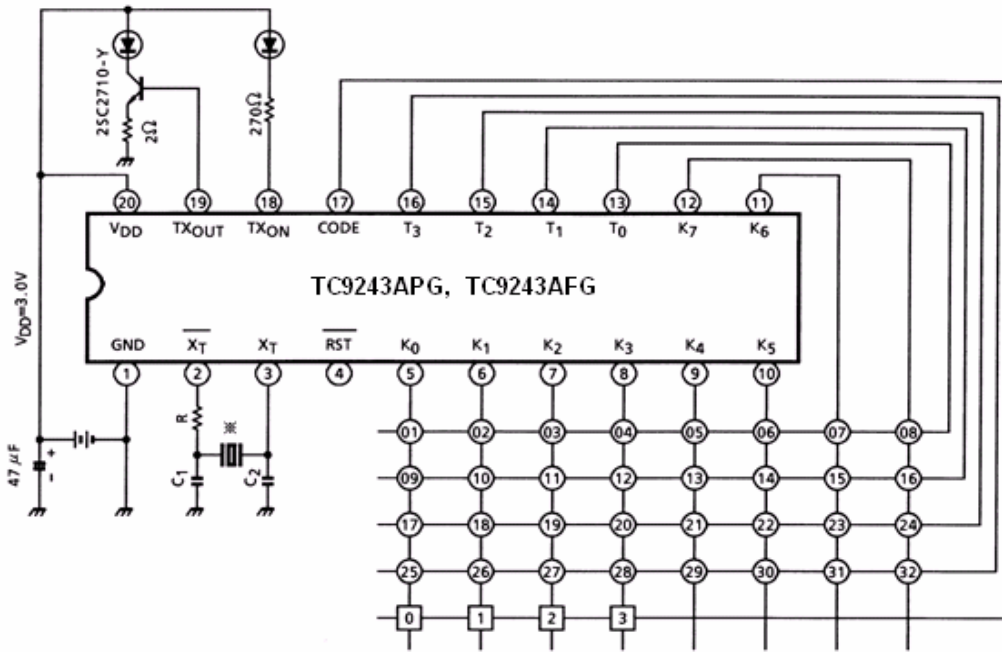


Note 4: Ceramic oscillator CSB455E (Murata Seisakusho) $C_1 = C_2 = 100 \text{ pF}$ $R = 6.8 \text{ k}\Omega$
 FCR455K3 (TDK) $C_1 = C_2 = 220 \text{ pF}$ $R = 2.2 \text{ k}\Omega$
 or equivalent

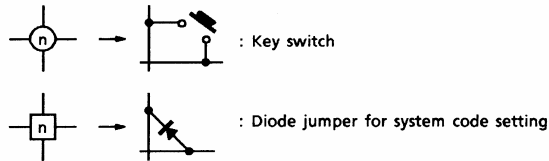

Package Dimensions

DIP20-P-300-2.54A

Unit : mm

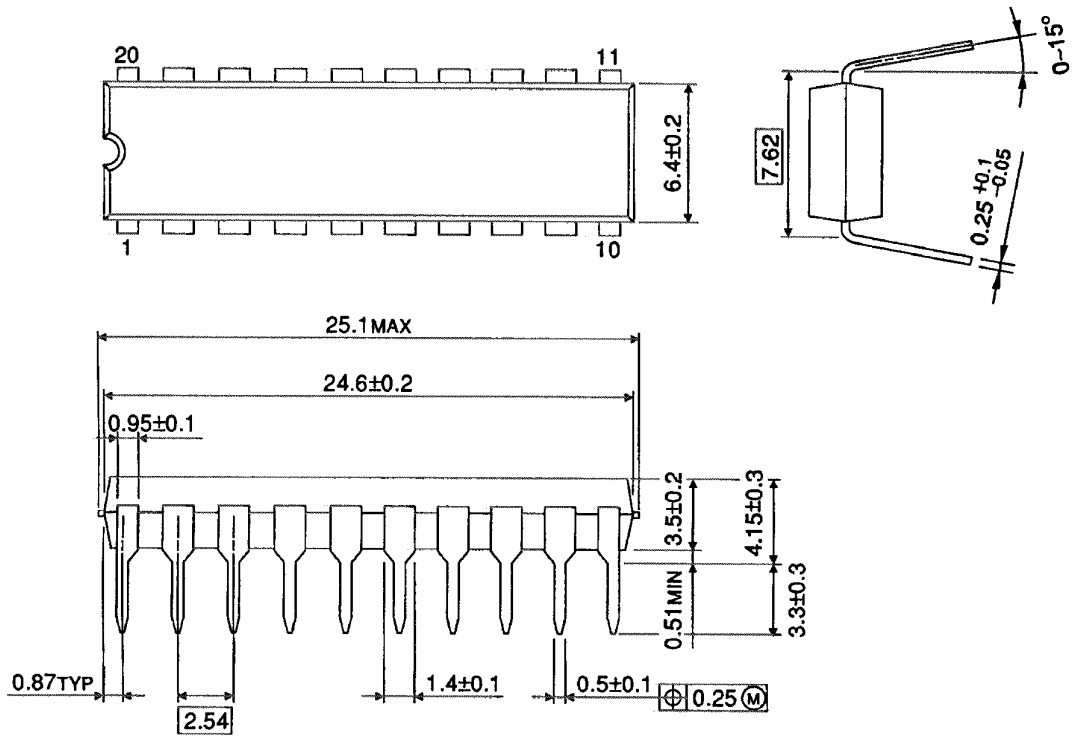


Weight: 1.4 g (typ.)

Package Dimensions

SOP20-P-300-1.27

Unit : mm

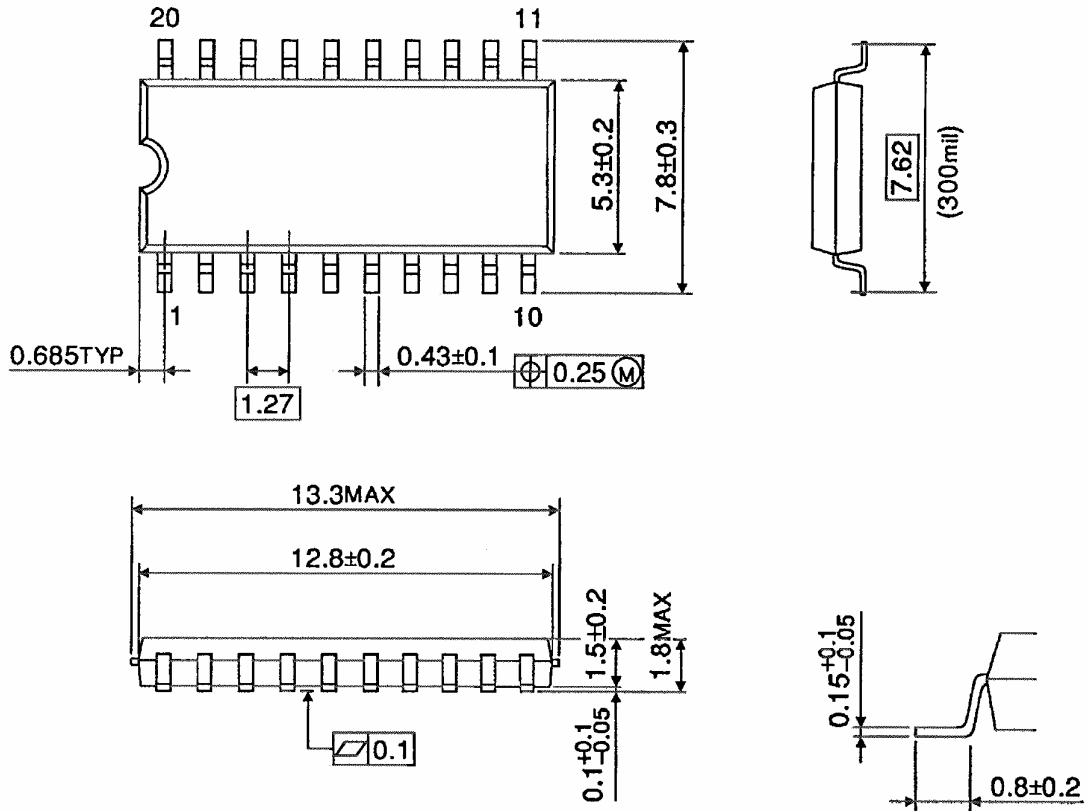

Weight: 0.48 g (typ.)

The following conditions apply to solderability:

- Solderability
 - (1) Use of Sn-63Pb solder bath
 - solder bath temperature = 230°C
 - dipping time = 5 seconds
 - number of times = once
 - use of R-type flux
 - (2) Use of Sn-3.0Ag-0.5Cu solder bath
 - solder bath temperature = 245°C
 - dipping time = 5 seconds
 - number of times = once
 - use of R-type flux

RESTRICTIONS ON PRODUCT USE

030619EBA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.