查询TIP627供应商 捷多邦，专业PCB打样工厂，24小时加急出货

TIP625, TIP626, TIP627
P-N-P DARLINGTON-CONNECTED SILICON POWER TRANSISTORS

REVISED OCTOBER 1984

T-33-31

- Designed For Complementary Use With TIP620, TIP621, TIP622
- 65 W at 25°C Case Temperature
- 5 A Rated Collector Current
- Min h_{FE} of 1000 at 3 V, 3 A
- 50 mJ Reverse Energy Rating

device schematic



TO-3 PACKAGE



THE COLLECTOR IS IN ELECTRICAL CONTACT WITH THE CASE

absolute maximum ratings at 25°C case temperature (unless otherwise noted)

	TIP625	TIP626	TIP627
Collector-base voltage	−60 V	−80 V	−100 V
Collector-emitter voltage (I_B = 0)	−60 V	−80 V	−100 V
Emitter-base voltage	−5 V		
Continuous collector current	−5 A		
Peak collector current (see Note 1)	−8 A		
Continuous base current	−0.1 A		
Continuous device dissipation at (or below) 25°C case temperature (see Note 2)	65 W		
Continuous device dissipation at (or below) 25°C free-air temperature (see Note 3)	4 W		
Unclamped inductive load energy (see Note 4)	50 mJ		
Operating collector junction and storage temperature range	−65°C to 200°C		
Lead temperature 3,2 mm (0.125 inch) from case for 10 seconds	260°C		

NOTES: 1. This value applies for $t_w \leq 0.3$ ms, duty cycle ≤ 10 %.
2. Derate linearly to 200°C case temperature at the rate of 0.37 W/°C or refer to Dissipation Derating Curve, Figure 9.
3. Derate linearly to 200°C free-air temperature at the rate of 23 mW/°C or refer to Dissipation Derating Curve, Figure 10.
4. This rating is based on the capability of the transistor to operate safely in the circuit in Figure 2. L = 20 mH, R_{BB2} = 100 Ω, V_{BB2} = 0 V, R_S = 0.1 Ω, V_{CC} = 20 V. Energy ≈ $I_C^2 L/2$.

找PDF 维库一下 pdf.dzsc.com

TIP625, TIP626, TIP627
P-N-P DARLINGTON-CONNECTED SILICON POWER TRANSISTORS

electrical characteristics at 25°C case temperature

PARAMETER	TEST CONDITIONS		TIP625			TIP626			TIP627			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
$V_{(BR)CEO}$	$I_C = -30$ mA, See Note 5	$I_B = 0$,	−60			−80			−100			V
I_{CBO}	$V_{CB} = -60$ V,	$I_E = 0$			−0.2							mA
	$V_{CB} = -80$ V,	$I_E = 0$						−0.2				
	$V_{CB} = -100$ V,	$I_E = 0$									−0.2	
I_{CEO}	$V_{CE} = -30$ V,	$I_B = 0$			−0.5							mA
	$V_{CE} = -40$ V,	$I_B = 0$						−0.5				
	$V_{CE} = -60$ V,	$I_B = 0$									−0.5	
I_{EBO}	$V_{EB} = -5$ V,	$I_C = 0$			−2			−2			−2	mA
h_{FE}	$V_{CE} = -3$ V, See Notes 5 and 6	$I_C = -0.5$ A,	1000			1000			1000			
	$V_{CE} = -3$ V, See Notes 5 and 6	$I_C = -3$ A,	1000			1000			1000			
V_{BE}	$V_{CE} = -3$ V, See Notes 5 and 6	$I_C = -3$ A,			−2.5			−2.5			−2.5	V
$V_{CE(sat)}$	$I_B = -12$ mA, See Notes 5 and 6	$I_C = -3$ A,			−2			−2			−2	V
	$I_B = -20$ mA, See Notes 5 and 6	$I_C = -5$ A,			−4			−4			−4	
V_F	$I_F = 10$ A, See Notes 5 and 6				3.5			3.5			3.5	V

NOTES: 5. These parameters must be measured using pulse techniques, $t_w = 300\ \mu s$, duty cycle ≤ 2 %.
6. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts located within 3,2 mm (0.125 inch) from the device body.

thermal characteristics

PARAMETER	MIN	TYP	MAX	UNIT
$R_{\theta JC}$			2.69	°C/W
$R_{\theta JA}$			43.75	

resistive-load switching characteristic at 25°C case temperature

PARAMETER	TEST CONDITIONS†				MIN	TYP	MAX	UNIT
t_{on}	$I_C = -3$ A,	$I_{B1} = -12$ mA,	$I_{B2} = 12$ mA,			1.5		μs
t_{off}	$V_{BE(off)} = 5$ V,	$R_L = 10\ \Omega$,	See Figure 1			8.5		

† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.

TEXAS INSTRUMENTS
POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

PARAMETER MEASUREMENT INFORMATION

T-33-31

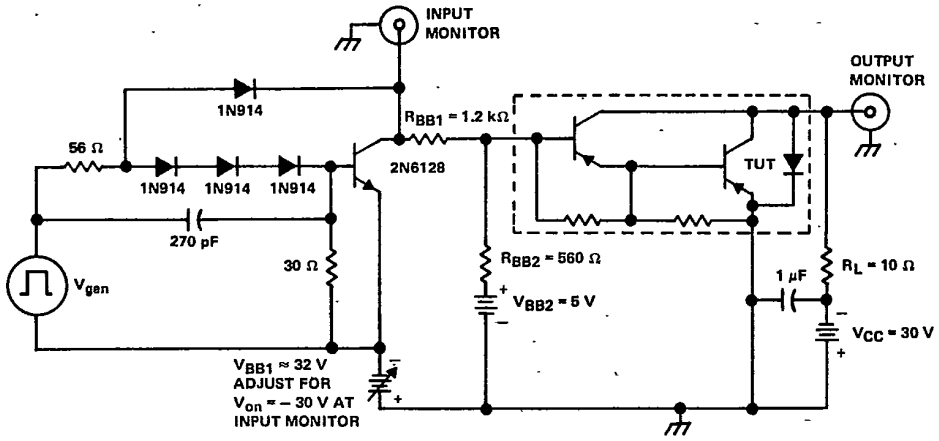

TEST CIRCUIT

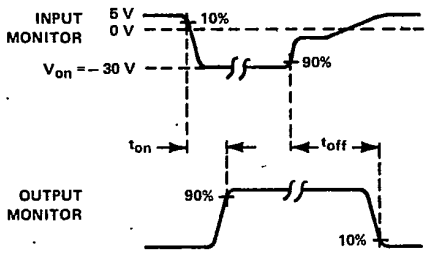

VOLTAGE WAVEFORMS

NOTES: A. V_{gen} is a 30-V pulse into a 50 Ω termination.
B. The V_{gen} waveform is supplied by a generator with the following characteristics: $t_r \leq 15$ ns, $t_f \leq 15$ ns, $Z_{out} = 50\ \Omega$, $t_w = 20\ \mu s$, duty cycle ≤ 2 %.
C. Waveforms are monitored on an oscilloscope with the following characteristics: $t_r \leq 15$ ns, $R_{in} \geq 10\ M\Omega$, $C_{in} \leq 11.5$ pF.
D. Resistors must be noninductive types.
E. The d-c power supplies may require additional bypassing in order to minimize ringing.

FIGURE 1. RESISTIVE-LOAD SWITCHING

TIP625, TIP626, TIP627
P-N-P DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

PARAMETER MEASUREMENT INFORMATION

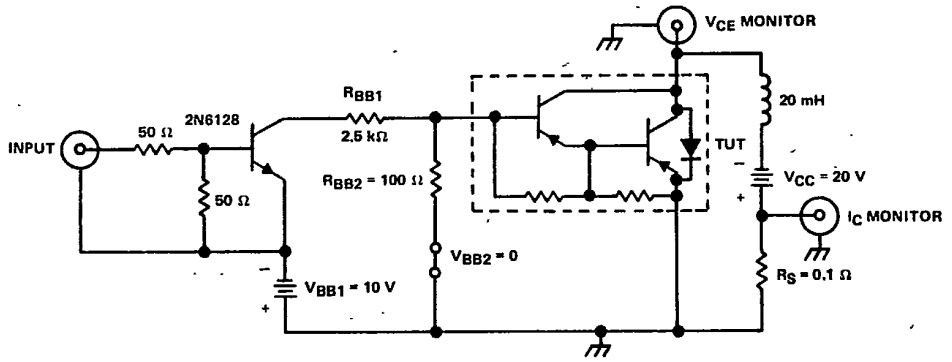

TEST CIRCUIT

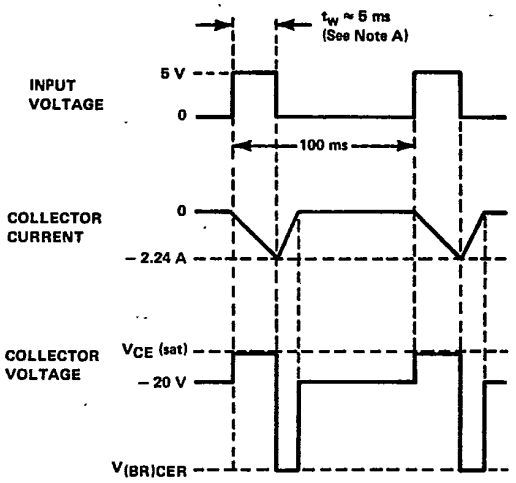

VOLTAGE AND CURRENT WAVEFORMS

NOTE A: Input pulse duration is increased until $I_{CM} = -2.24$ A.

FIGURE 2. INDUCTIVE-LOAD SWITCHING

TEXAS INSTRUMENTS
POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

TIP625, TIP626, TIP627
P-N-P DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

TYPICAL CHARACTERISTICS

T-33-31

STATIC FORWARD CURRENT TRANSFER RATIO
vs
COLLECTOR CURRENT

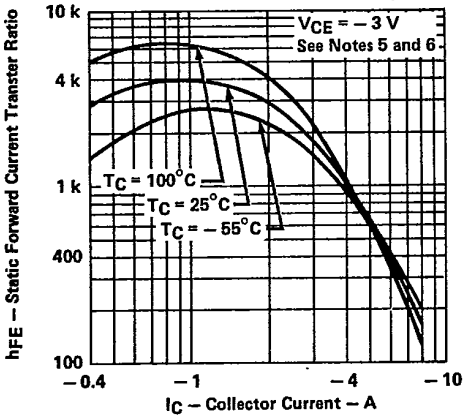

FIGURE 3

BASE-EMITTER VOLTAGE
vs
CASE TEMPERATURE

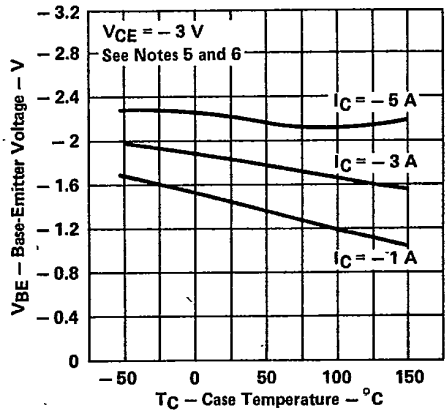

FIGURE 4

COLLECTOR-EMITTER SATURATION VOLTAGE
vs
CASE TEMPERATURE

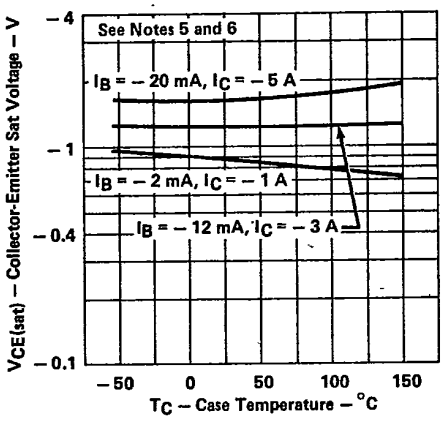

FIGURE 5

SMALL-SIGNAL COMMON-EMITTER
FORWARD CURRENT TRANSFER RATIO
vs
FREQUENCY

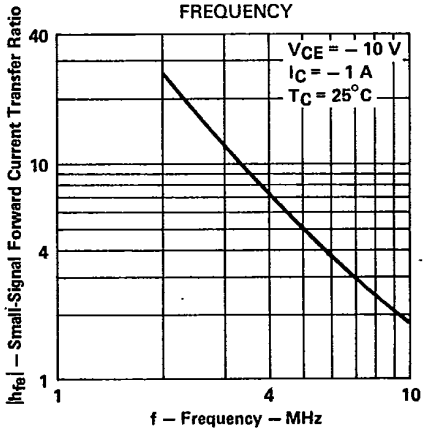

FIGURE 6

NOTES: 5. These parameters must be measured using pulse techniques, t_w = 300 μs, duty cycle ≤ 2 %.
6. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts located within 3,2 mm (0.125 inch) from the device body.

TEXAS INSTRUMENTS
POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

TIP625, TIP626, TIP627
P-N-P DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

MAXIMUM SAFE OPERATING AREA

MAXIMUM COLLECTOR CURRENT
vs
COLLECTOR-EMITTER VOLTAGE

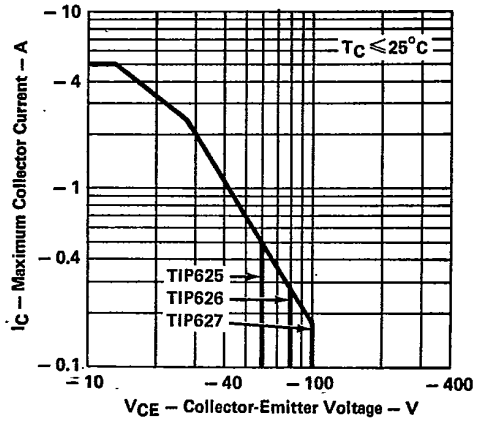

FIGURE 7

MAXIMUM COLLECTOR CURRENT
vs
UNCLAMPED INDUCTIVE LOAD

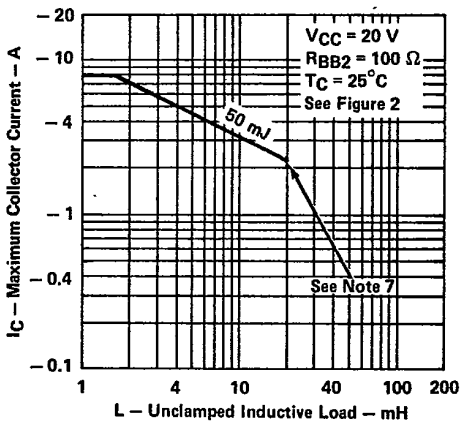

FIGURE 8

NOTE 7: Above this point the safe operating area has not been defined.

THERMAL INFORMATION

CASE TEMPERATURE
DISSIPATION DERATING CURVE

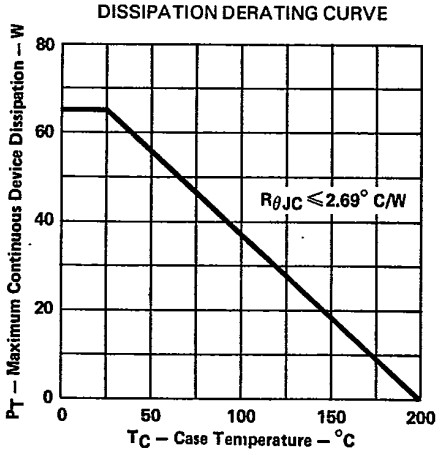

FIGURE 9

FREE-AIR TEMPERATURE
DISSIPATION DERATING CURVE

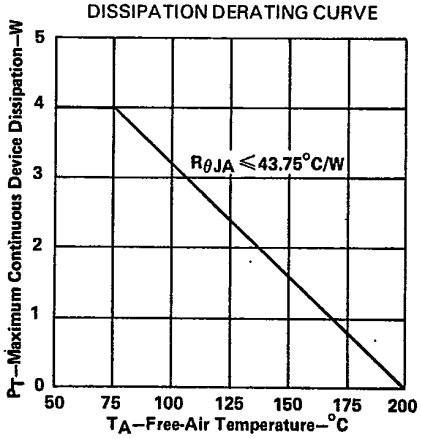

FIGURE 10

5 TIP Devices

TEXAS INSTRUMENTS
POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

1283