


### WCDMA / HSUPA Band V&VI Power-PAD™-Module

#### Functional Block Diagram

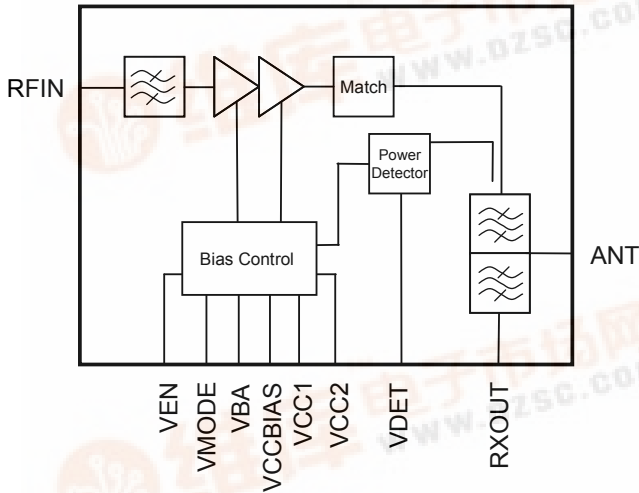

#### Product Description

The PowerPAD™ is an integrated 3V Linear Power Amplifier, Duplexer and Transmit Filter Module including a highly accurate Output Power Detector designed for mobile UMTS handset applications, supporting HSUPA operation with transmission data-rates up to 10Mb/s.

It features 2 output power modes, additional continuous bias in low power mode, low off and standby currents, and a separate pin for module enable. RF input and output matching is included within the module; therefore, minimal external circuitry is required.

The PowerPAD™ gives excellent RF performance with low current consumption resulting in longer talk times in portable applications. The tiny 7x4x1.1 mm<sup>3</sup> surface mount package is ideal for new generation slim, small and light phones.

#### Electrical Specifications

Parameter	Min	Typ	Max	Units
Frequency	826.4		846.6	MHz
Linear P <sub>OUT</sub> (HSUPA) high power mode	25			dBm
Maximum current high power mode		410		mA
Linear P <sub>OUT</sub> (HSUPA) low power mode	16			dBm
Idle current low power mode		15		mA
ACPR (HSUPA) 5 MHz		-45		dBc
ALPR (HSUPA) 10 MHz		-60		dBc
Ant-to-RX Insertion Loss		2.5		dB

Test Conditions: V<sub>CC1</sub> = V<sub>CC2</sub> = 3.4 V, T = 25 °C

#### Features

- Handset PowerPAD™ (PA-Duplexer) Module for UMTS Bands V&VI (Cellular band)
- Specified for HSDPA Modulation (HSUPA capable)
- Integrates Power Amplifier, Highly Accurate Output Power Detector, Transmit Filter and Duplexer
- No Regulated Voltage Required
- Separate 'Module Enable' Pin
- All RF Ports Matched to 50 Ω
- Low Current Consumption:
  - 2 Power Modes
  - Continuous Bias in Low Power Mode
  - Extremely Low Idle Current (15mA typ.) in Low Power Mode
- Compatible for Low Collector Voltage Operation with DC-DC-Converters

#### Applications

- 3G UMTS Handsets and Data-Cards

#### Package Style

- Compact 7 x 4 x 1.1 mm<sup>3</sup> 16-Pin LGA Package

