

SP4T High Power 2.5V GSM Antenna Switch

Features:

- SLIM-17 Packaged PHEMT GaAs MMIC Die
- Small Footprint 2.5 x 2.5 mm
- Asymmetric Design for Lowest TX Insertion Loss: 0.5dB typ
- Thin Package: 0.6mm max for LTCC modules
- Excellent Harmonic Performance
 - -75dBc 2nd Harmonic at GSM 850/900, +35dBm
 - -72dBc 2nd Harmonic at DCS/PCS, +33 dBm
 - -76dBc 3rd Harmonic at GSM 850/900, +35dBm
 - -75dBc 3rd Harmonic at DCS/PCS, +33 dBm
- High Isolation:- 33dB typ
- Very Low Control Current


Applications:

- GSM Antenna Switch Modules (ASM).

Description:

TriQuint's TQP4M4004 is a high power antenna switch in a single pole four throw (SP4T) configuration. The die utilizes TriQuint's PHEMT MMIC switch process to provide optimized harmonic performance for use in GSM applications. PHEMT Switches are a very low DC current replacement for classic PIN diode based switches. The SLIM-17 package is 0.6mm thick with a 2.5 x 2.5 mm footprint, which is ideally suited to replace package PIN diodes on height critical LTCC modules. The TQP4M4004 can be combined with a Low Pass TX Filter and SAW RX filters to form a GSM Antenna Switch Module. Also available as Bare Die TQ4M4004.

SLIM17 Package Outline:

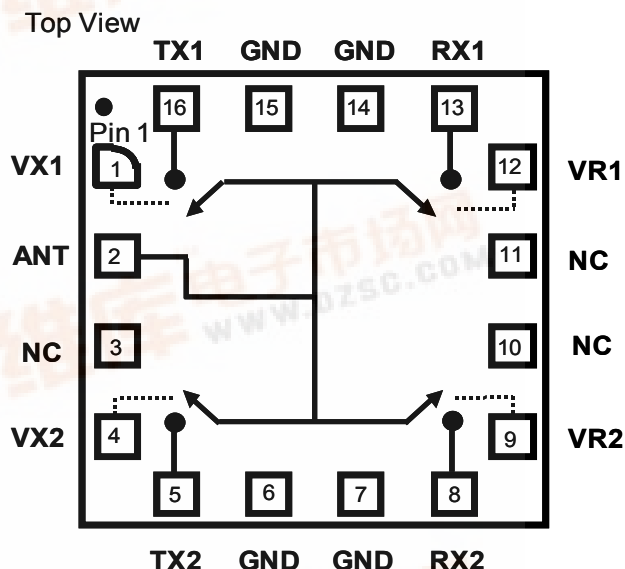

Electrical Performance: Ta = 25°C, Zo=50 Ohms, Vcontrol = 0V / 2.5V¹

Parameter	Test Conditions	Units	Min	Typ	Max
Tx Insertion Loss	GSM850/900	dB		0.48	
Tx Insertion Loss	DCS/PCS	dB		0.53	
Rx Insertion Loss	GSM850/900	dB		0.55	
Rx Insertion Loss	DCS/PCS	dB		0.60	
Isolation Rx to Rx	GSM850/900, DCS/PCS	dB		-34	
Isolation Tx to Rx	GSM850/900, DCS/PCS	dB		-33	
Isolation Tx to Tx	GSM850/900, DCS/PCS	dB		-33	
2 nd Harmonic	GSM850	dBc		-75	
2 nd Harmonic	GSM900	dBc		-75	
2 nd Harmonic	DCS	dBc		-75	
2 nd Harmonic	PCS	dBc		-71	
3 rd Harmonic	GSM850	dBc		-76	
3 rd Harmonic	GSM900	dBc		-77	
3 rd Harmonic	DCS	dBc		-76	
3 rd Harmonic	PCS	dBc		-74	



SP4T High Power 2.5V GSM Antenna Switch

Electrical Performance (continued): Ta = 25°C, Zo=50 Ohms, Vcontrol = 0V / 2.5V¹

Parameter	Test Conditions	Units	Min	Typ	Max
IIP3	Two tones; +20dBm each; 1 MHz spacing; 1950 MHz	dBm		+53.5	
P-0.1 dB	DCS/PCS	dBm		+38	
Return Loss	0.5 to 2.0GHz	dB		-20	
Leakage Current	-	μA		30	100
Trise, TFall	10% to 90% RF, 90% to 10% RF	μS		0.2	
Ton, Toff	50% control to 90% RF, and 50% control to 10% RF	μS		0.3	

Truth Table: ^{2, 3}

VX1	VR1	VR2	VX2	Switch Position
1	0	0	0	TX1 → Ant
0	1	0	0	RX1 → Ant
0	0	1	0	RX2 → Ant
0	0	0	1	TX2 → Ant

Notes:

- External DC blocking capacitors are required at all RF ports
- State 1 = +2.0V to +5.0V, State 0 = 0V to +0.2V
- Differential voltage from State 1 to State 2 must be a minimum of 2.0V
- Exceeding any parameter either individually or in combination may cause permanent damage.

Absolute Maximum Ratings⁴:

Parameter	Absolute Maximum
Max Input Power	+37dBm
Control Voltage	+/-5V
Operating Temp	-40°C to +85°C
Storage Temp	-65°C to +150°C



Pin Descriptions:

Pad Number	Pad Name	Description
1	VX1	Control TX Port 1
2	ANT	Antenna
3	NC	No Connection
4	VX2	Control TX Port 2
5	TX2	TX Port 2
6	GND	Ground
7	GND	Ground
8	RX2	RX Port 2
9	VR2	Control RX Port 2
10	NC	No Connection
11	NC	No Connection
12	VR1	Control RX Port 1
13	RX1	RX Port 1
14	GND	Ground
15	GND	Ground
16	TX1	TX Port 1
Package Paddle	NC	No Connection




SP4T High Power 2.5V GSM Antenna Switch

Typical Performance Curves:

Insertion Loss and Match

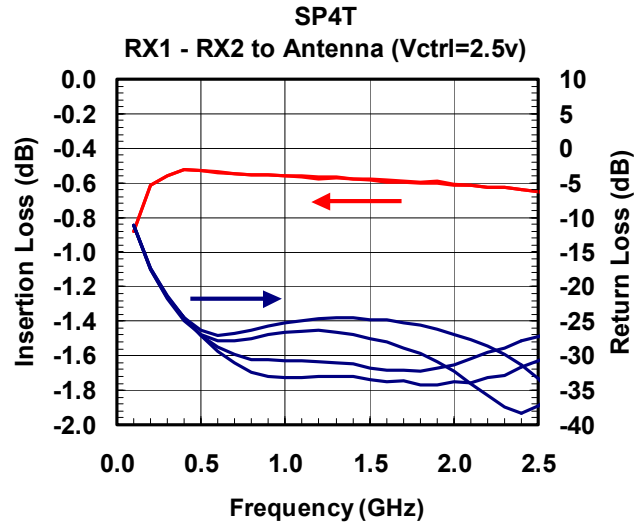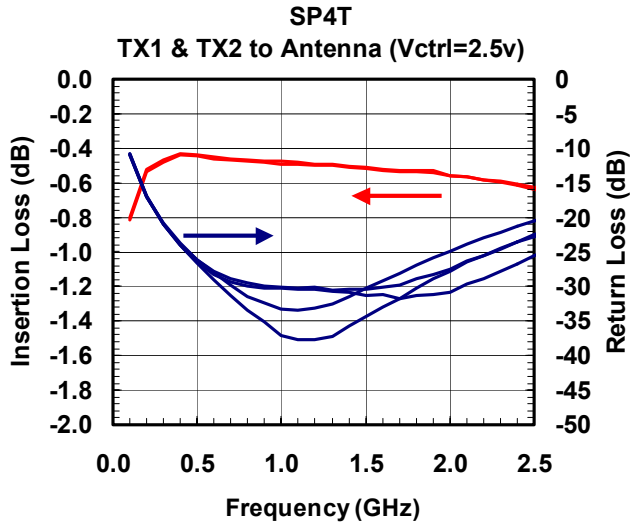


Isolation

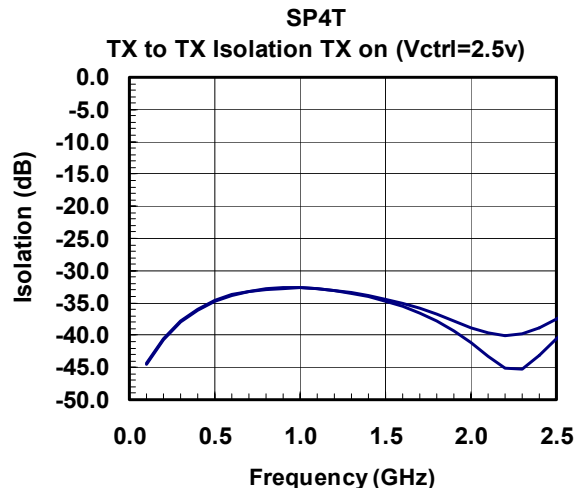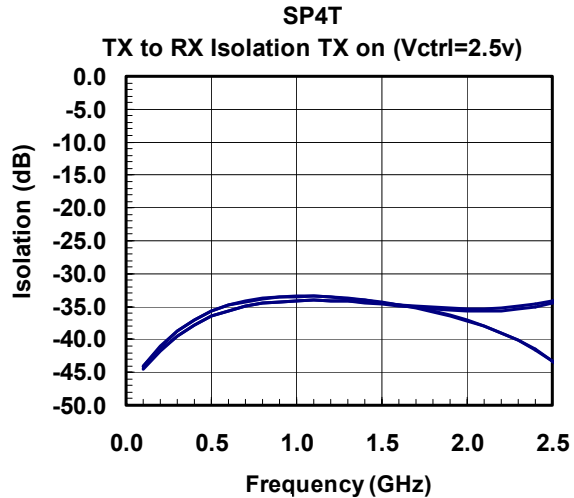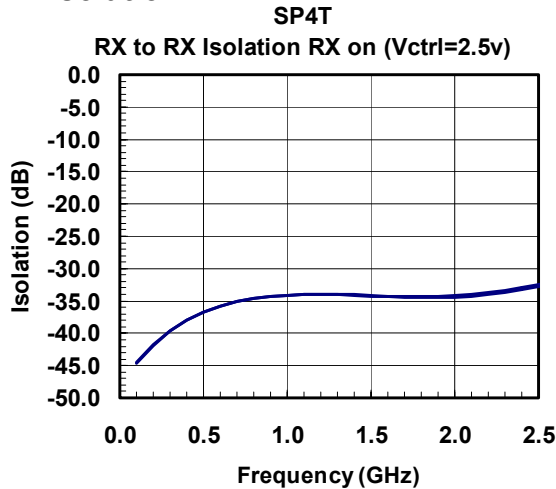


SP4T High Power 2.5V GSM Antenna Switch


Harmonics GSM850

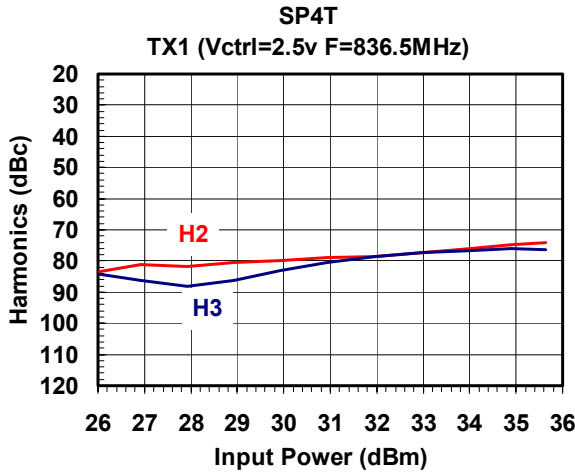


Harmonics GSM900

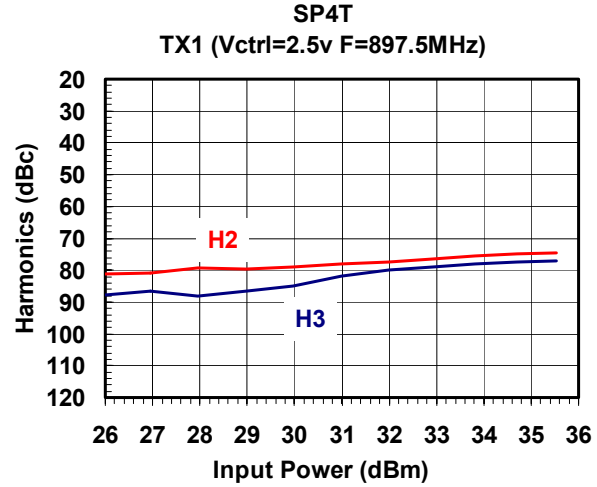

Harmonics DCS

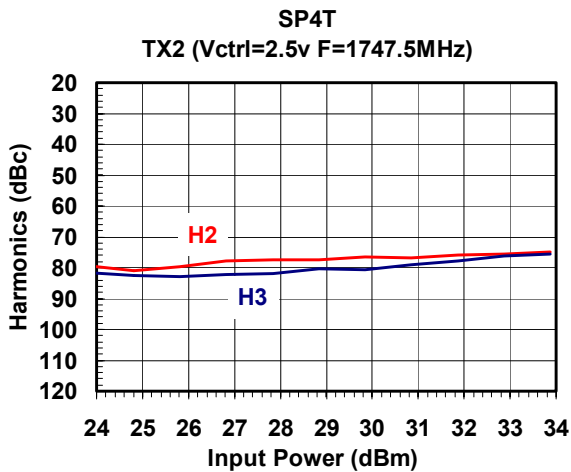


Harmonics PCS

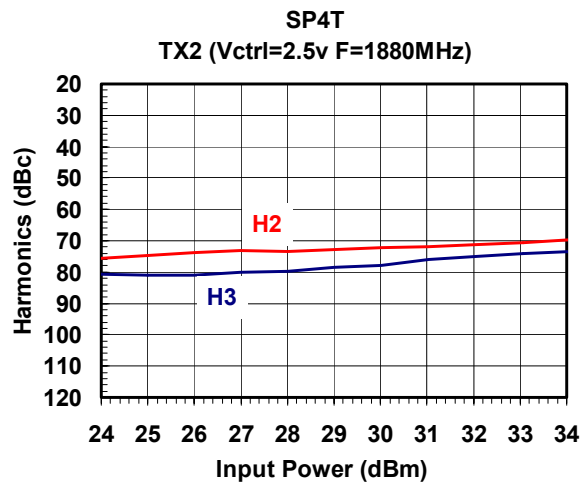

Application Example


Dual Band GSM/DCS Antenna Switch Module
TQP4M4004 Application

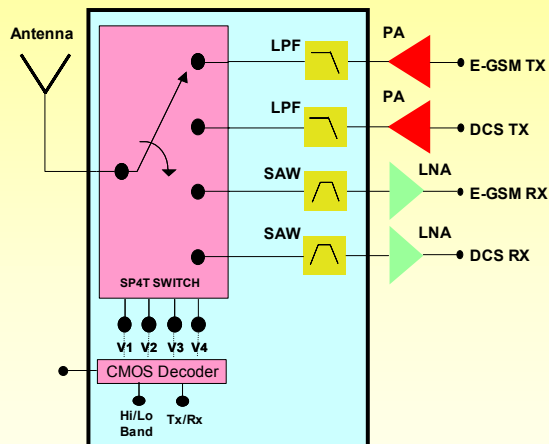


SP4T High Power 2.5V GSM Antenna Switch

SLIM-17 Package


0.60 Max Thickness



Top View

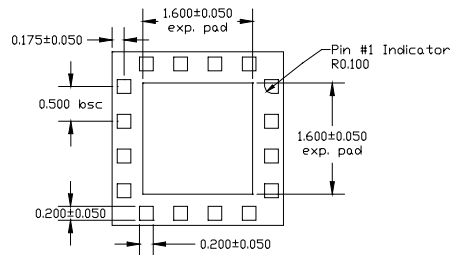

Bottom View




Side View

NOTES


- 1.1 All dimensions are in Millimeter (mm)
- 1.2 Package surface is mirror finish.
- 1.3 Dimensions are exclusive of mold flash and gate burr.
- 1.4 Lead finish is gold.

Package Configuration On Board:

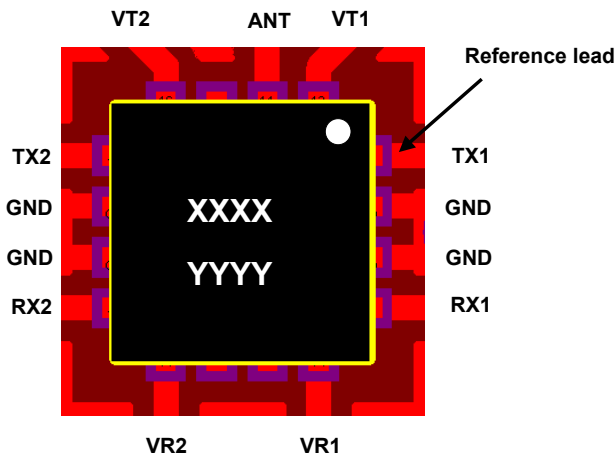

XXXX, YYYY last 4 digits of date code and batch code

Application Board Loss De-Embedding Curve:

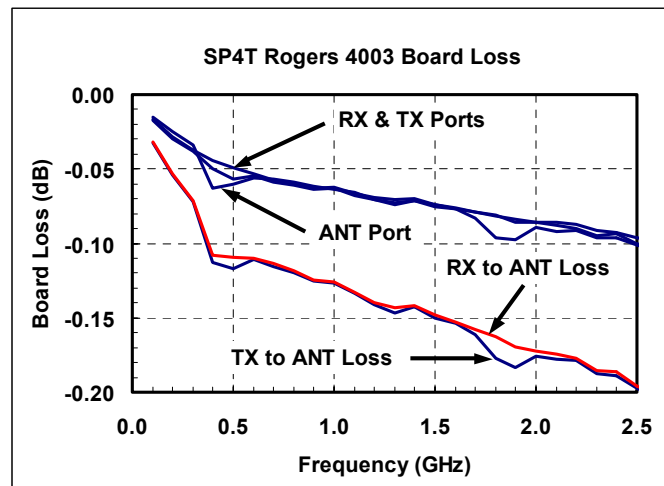

SP4T High Power 2.5V GSM Antenna Switch

Application Board:

RF connector



RF connector

RF connector

RF connector


RF connector

DC connector

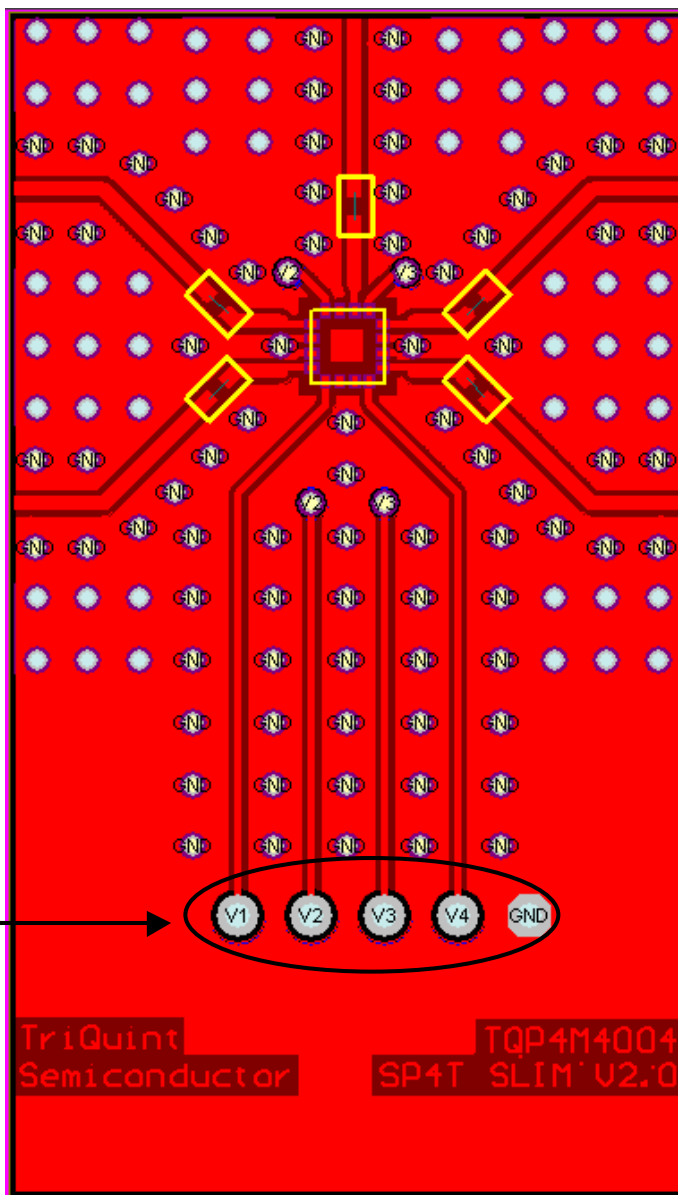

SP4T High Power 2.5V GSM Antenna Switch

Application Board Capacitors and Locations:

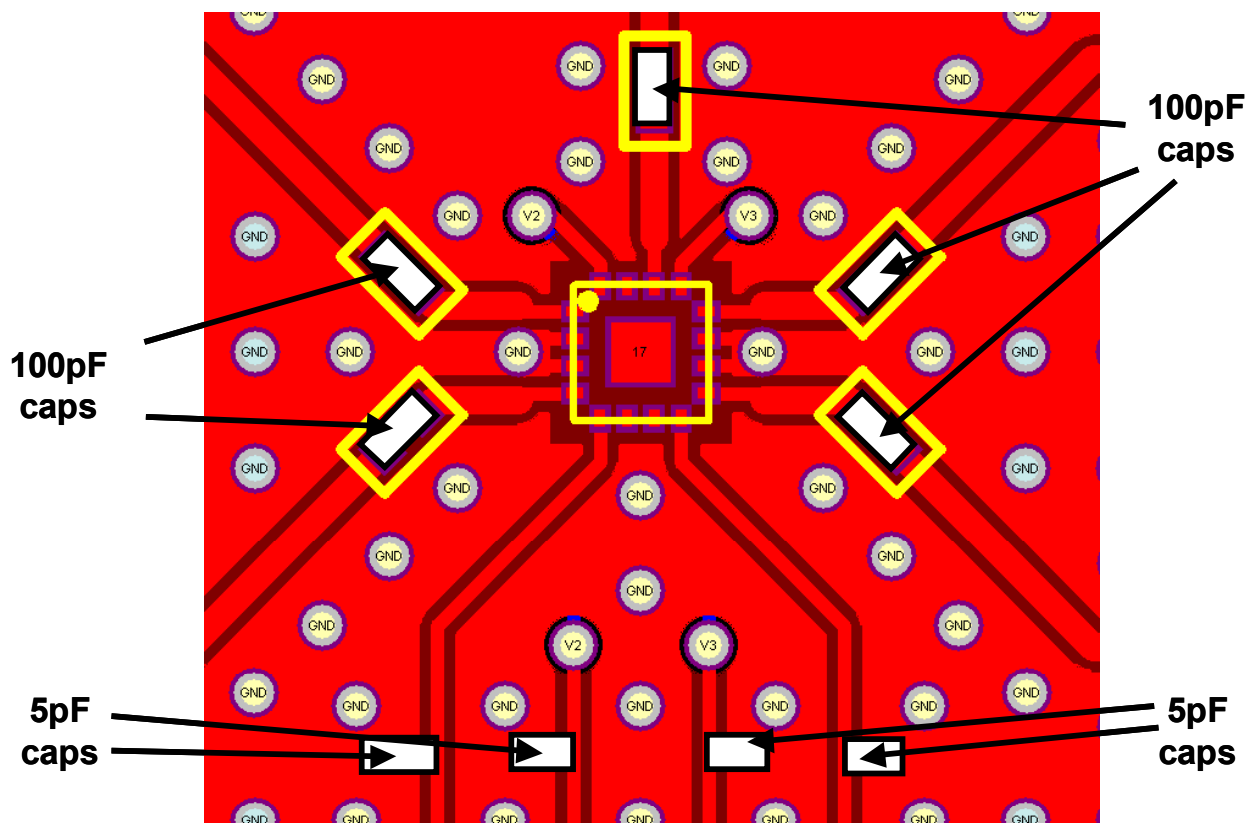

Additional Information

For latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com

Tel: (503) 615-9000

Email: info_wireless@tqs.com

Fax: (503) 615-8902

For technical questions and additional information on specific applications:

Email: info_wireless@tqs.com

The information provided herein is believed to be reliable; TriQuint assumes no liability for inaccuracies or omissions. TriQuint assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party.

TriQuint does not authorize or warrant any TriQuint product for use in life-support devices and/or systems.

Copyright © 2004 TriQuint Semiconductor, Inc. All rights reserved.