

## Precision voltage regulator

**μA723/723C**

### DESCRIPTION

The μA723/μA723C is a monolithic precision voltage regulator capable of operation in positive or negative supplies as a series, shunt, switching, or floating regulator. The 723 contains a temperature-compensated reference amplifier, error amplifier, series pass transistor, and current limiter, with access to remote shutdown.

### FEATURES

- Positive or negative supply operation
- Series, shunt, switching, or floating operation
- 0.01% line and load regulation
- Output voltage adjustable from 2V to 37V
- Output current to 150mA without external pass transistor
- μA723 MIL-STD-883A, B, C available

### ORDERING INFORMATION

DESCRIPTION	TEMPERATURE RANGE	ORDER CODE	DWG #
14-Pin Ceramic Dual In-Line Package (CERDIP)	-55°C to 125°C	μA723F	0581B
14-Pin Plastic Dual In-Line Package (DIP)	0 to 70°C	μA723CN	SOT27-1
14-Pin Plastic Small Outline (SO) Package	0 to 70°C	μA723CD	SOT108-1

### EQUIVALENT CIRCUIT

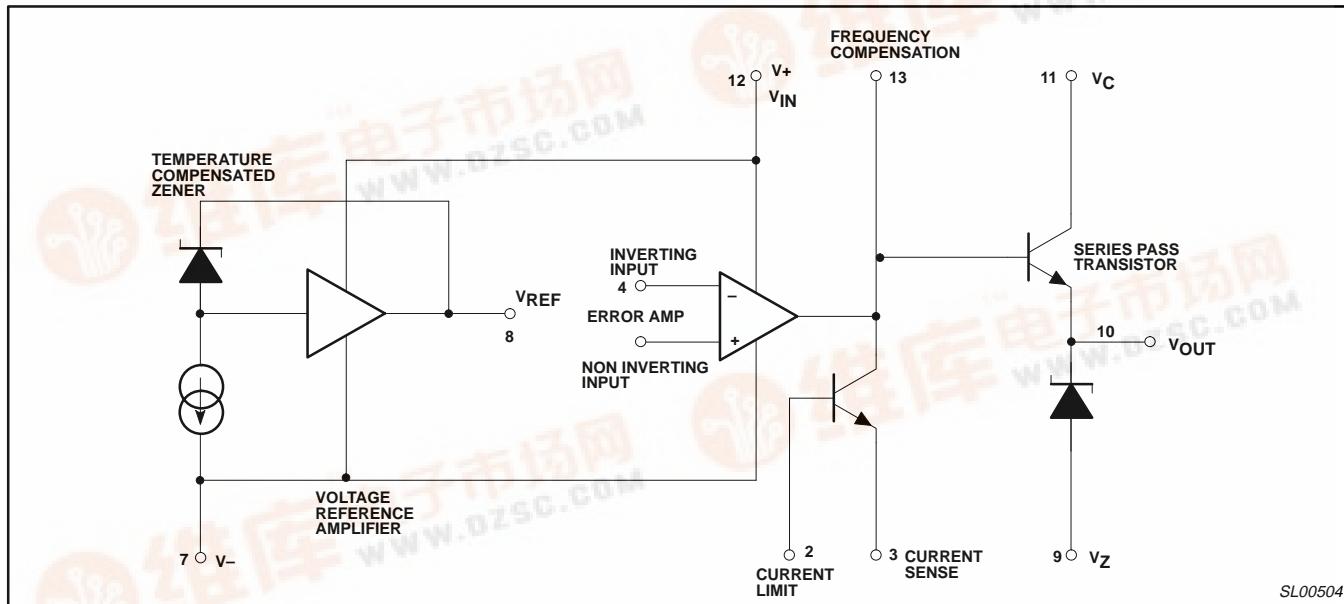


Figure 2. Equivalent Circuit

### PIN CONFIGURATION

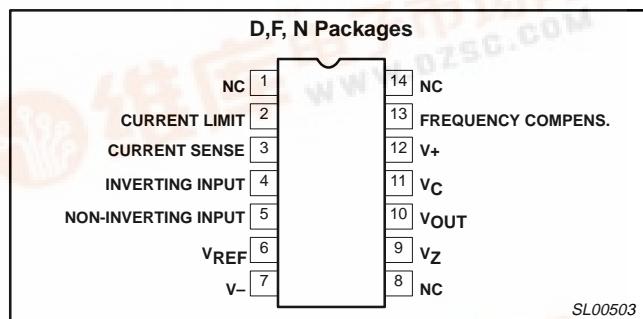


Figure 1. Pin Configuration

## Precision voltage regulator

 $\mu$ A723/723C

## ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	RATING	UNIT
	Pulse voltage from V+ to V- (50ms)	50	V
	Continuous voltage from V+ to V-	40	V
	Input-output voltage differential	40	V
$V_{DIFF}$	Error amplifier maximum input differential voltage	$\pm 5$	V
$V_{CM}$	Error amplifier non-inverting input (Pin 5) to -V (Pin 7)	8	V
$I_{OUT}$	Maximum output current	150	mA
	Current from $V_{REF}$	15	mA
	Current from $V_Z$	25	mA
$P_{MAX}$	Maximum power dissipation $T_A=25^\circ\text{C}$ (still-air) <sup>1</sup> F package N package D package	1190 1420 1040	mW mW mW
$T_A$	Operating ambient temperature range $\mu$ A723 $\mu$ A723C	-55 to +125 0 to 70	°C °C
$T_{STG}$	Storage temperature range	-65 to +150	°C
$T_{SOLD}$	Lead soldering temperature (10sec max)	300	°C

## NOTES:

1. The following derating factors should be applied above 25°C  
F package at 9.5mW/°C  
N package at 11.4mW/°C  
D package at 8.3mW/°C

## Precision voltage regulator

 $\mu$ A723/723C

## DC ELECTRICAL CHARACTERISTICS

 $T_A=25^\circ\text{C}$ , unless otherwise specified.<sup>1</sup>

SYMBOL	PARAMETER	TEST CONDITIONS	$\mu$ A723			$\mu$ A723C			UNITS
			Min	Typ	Max	Min	Typ	Max	
$V_{R \text{ LINE}}$	Line regulation <sup>2</sup>	$V_{IN}=12\text{V}$ to $V_{IN}=15\text{V}$ $V_{IN}=12\text{V}$ to $V_{IN}=40\text{V}$		0.01 0.02	0.1 0.2		0.01 0.1	0.1 0.5	% $V_{OUT}$
$V_{R \text{ LOAD}}$	Load regulation <sup>2</sup>	$I_L=1\text{mA}$ to $I_L=50\text{mA}$		0.03	0.15		0.03	0.2	% $V_{OUT}$
$\Delta V_{IN}/\Delta V_O$	Ripple Rejection	$f=50\text{Hz}$ to $10\text{kHz}$ , $C_{REF}=0$		74			74		dB
		$f=50\text{Hz}$ to $10\text{kHz}$ , $C_{REF}=5\mu\text{F}$		86			86		
$I_{OS}$	Short-circuit current	$R_{SC}=10\Omega$ , $V_{OUT}=0$		65			65		mA
$V_{REF}$	Reference voltage	$I_{REF}=0.1\text{mA}$	6.95	7.15	7.35	6.80	7.15	7.50	V
$V_{REF \text{ (LOAD)}}$	Reference voltage change with load	$I_{REF}=0.1\text{mA}$ to $5\text{mA}$			20			20	mV
$V_{NOISE}$	Output noise voltage	BW= $100\text{Hz}$ to $10\text{kHz}$ , $C_{REF}=0$ BW= $100\text{Hz}$ to $10\text{kHz}$ , $C_{REF}=5\mu\text{F}$		20 2.5			20 2.5		$\mu\text{V}_{RMS}$
S	Long-term stability	$T_j=T_{jmax}$ .	$TA=25^\circ\text{C}$ for end point measurement		0.1			0.1	%1000 hrs.
$I_{SCD}$	Standby current drain	$I_L=0$ , $V_{IN}=30\text{V}$		2.3	3.5		2.3	4.0	mA
$V_{IN}$	Input voltage range		9.5		40	9.5		40	V
$V_{OUT}$	Output voltage range		2.0		37	2.0		37	V
$V_{DIFF}$	Input-output voltage differential		3.0		38	3.0		38	V

**The following specifications apply over the operating temperature ranges.**

$V_{R \text{ LINE}}$	Line regulation	$V_{IN}=12\text{V}$ to $V_{IN}=15\text{V}$			0.3			0.3	% $V_{OUT}$
$V_{R \text{ LOAD}}$	Load regulation	$I_L=1\text{mA}$ to $I_L=50\text{mA}$			0.6			0.6	% $V_{OUT}$
TC	Average temperature coefficient of output voltage			0.002	0.015		0.003	0.015	%/°C







**NOTES:**

- $V_{IN}=V+=V_C=12\text{V}$ ,  $V-=0\text{V}$ ,  $V_{OUT}=5\text{V}$ ,  $I_L=1\text{mA}$ ,  $R_{SC}=0$ ,  $C_1=100\text{pF}$ ,  $C_{REF}=0$  and divider impedance as seen by error amplifier  $\leq 10\text{k}\Omega$ .
- The load and line regulation specifications are for constant junction temperature. Temperature drift effects must be taken into account separately when the unit is operating under conditions of high dissipation.

## Precision voltage regulator

 $\mu$ A723/723C

## TYPICAL PERFORMANCE CHARACTERISTICS

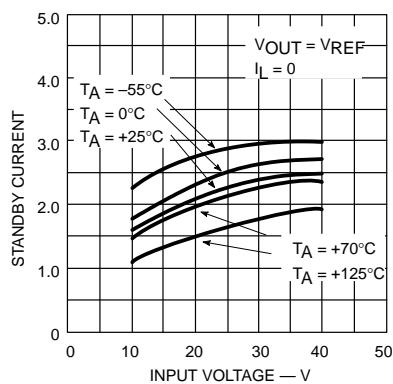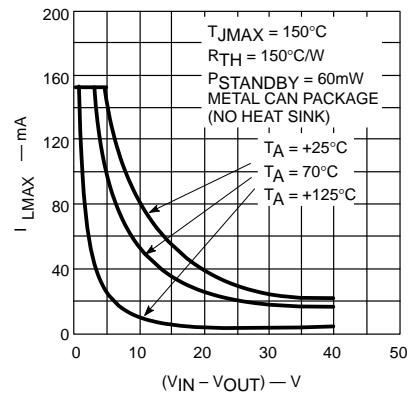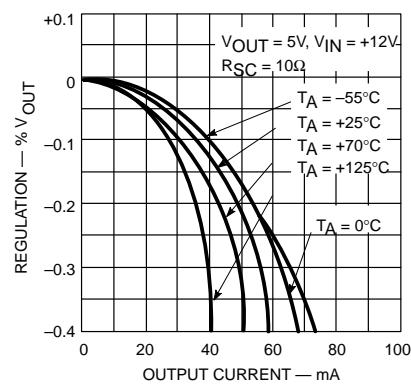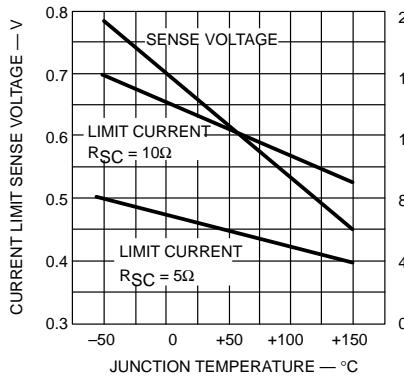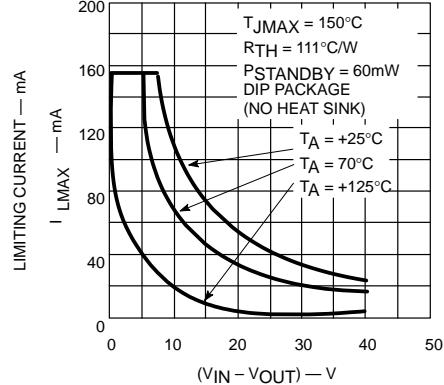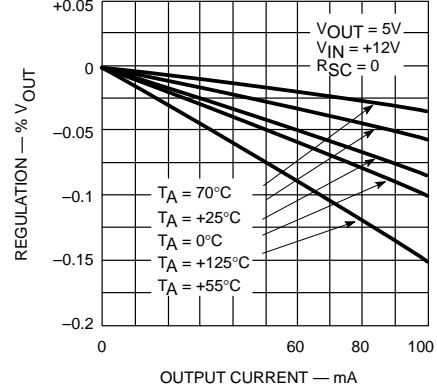Standby Current Drain  
as a Function of Input VoltageMaximum Load Current  
as a Function of  
Input-Output Voltage  
DifferentialLoad Regulation  
Characteristics with  
Current LimitingCurrent Limiting  
Characteristics as a  
Function of Junction  
TemperatureMaximum Load Current  
as a Function of  
Input-Output Voltage  
DifferentialLoad Regulation  
Characteristics Without  
Current Limiting

## Load Transient Response

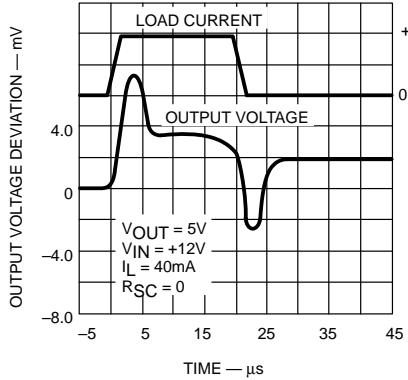
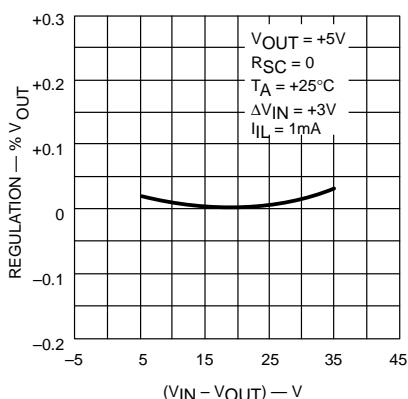
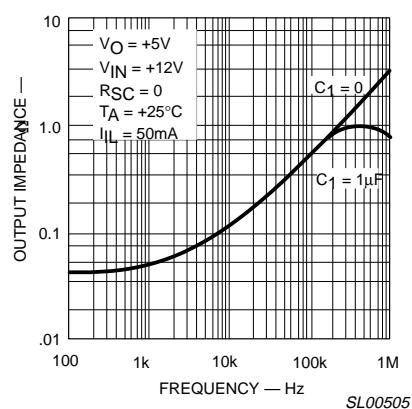
Line Regulation as a  
Function of Input-Output  
Voltage DifferentialOutput Impedance as  
a Function of Frequency

Figure 3. Typical Performance Characteristics

SL00505

## Precision voltage regulator

 $\mu$ A723/723C

## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

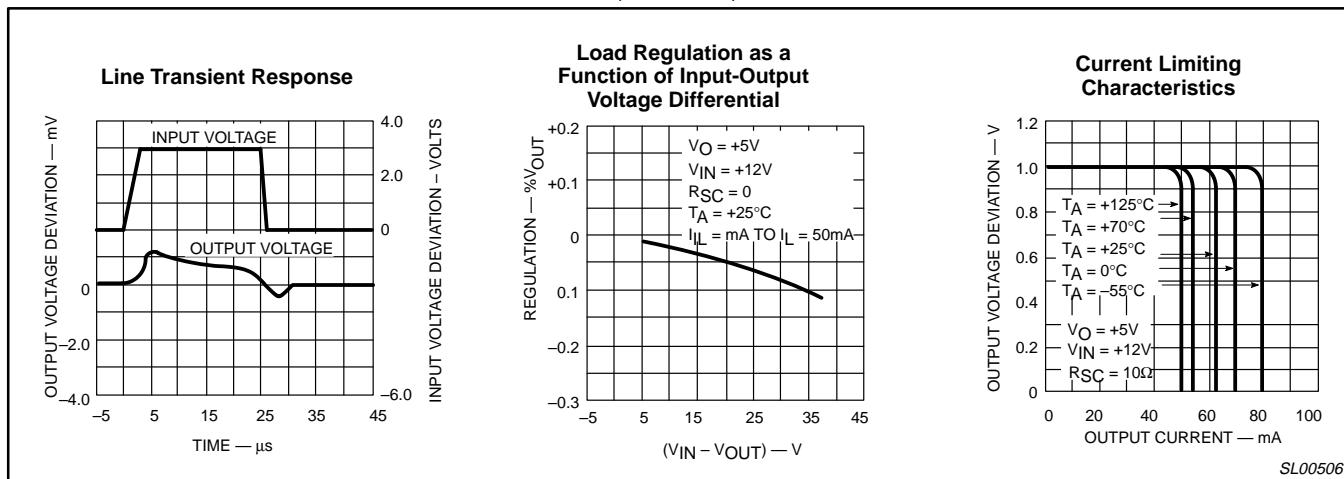


Figure 4. Typical Performance Characteristics (cont.)

## TYPICAL APPLICATIONS


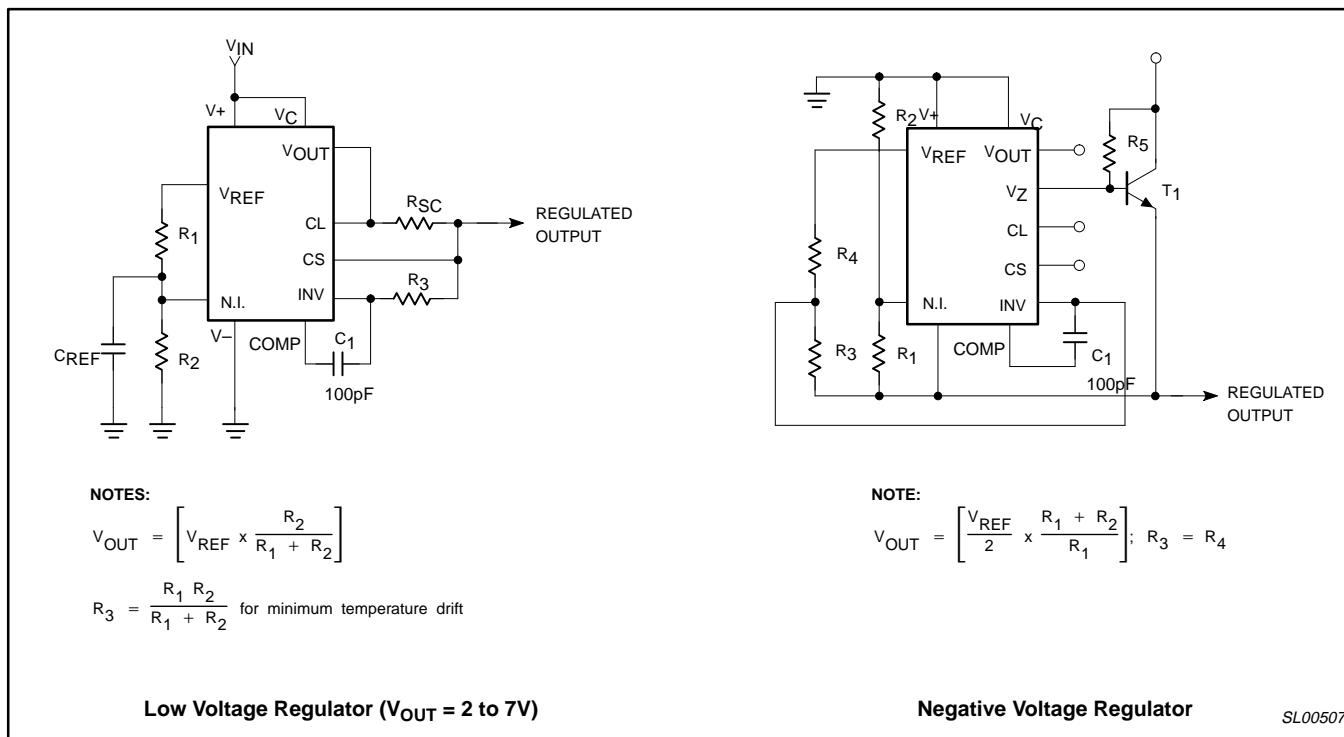


Figure 5. Typical Applications

## Precision voltage regulator


μA723/723C

## TYPICAL APPLICATIONS (Continued)

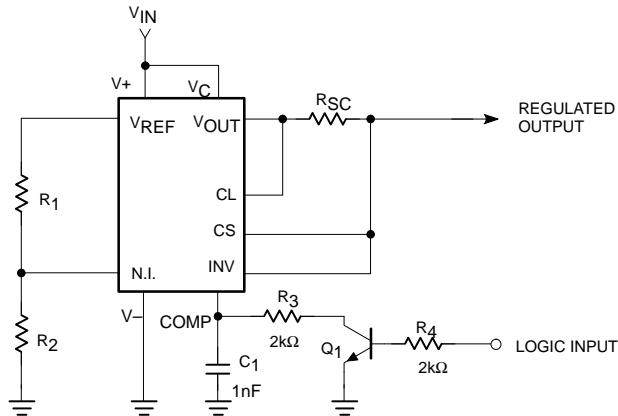

NOTE:

$$V_{OUT} = \left[ V_{REF} \times \frac{R_2}{R_1 + R_2} \right]$$

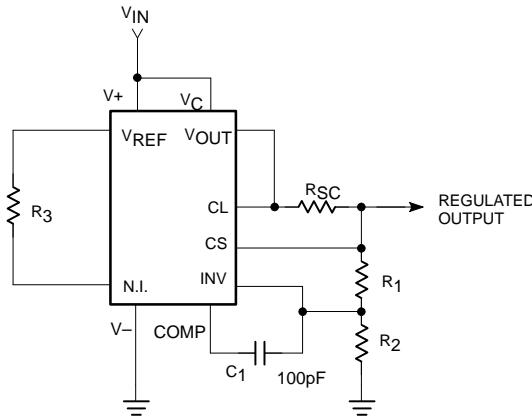


NOTE:

$$V_{OUT} = \left[ V_{REF} \times \frac{R_2}{R_1 + R_2} \right]; R_3 = R_4$$

$$R_3 = \frac{R_1 R_2}{R_1 + R_2} \text{ for minimum temperature drift}$$

R3 may be eliminated for minimum component count

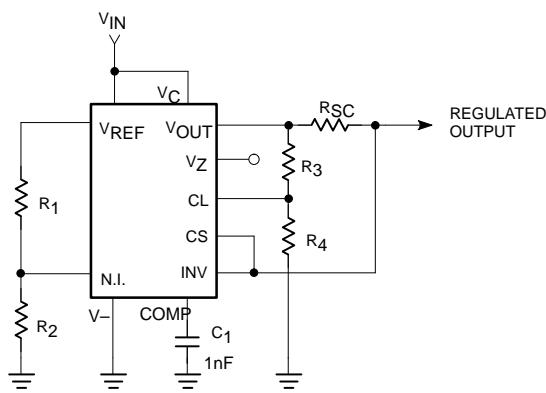
Remote Shutdown Regulator With Current Limiting ( $V_{OUT} = 2$  to 7V)

NOTES:

$$I_{KNEE} = \left[ \frac{V_{OUT} R_3}{R_{SC} R_4} + \frac{V_{SENSE} (R_3 + R_4)}{R_{SC} R_4} \right]$$

$$V_{OUT} = \left[ V_{REF} \times \frac{R_1 + R_2}{R_4} \right]$$

$$I_{SHORT\ CKT} = \left[ \frac{V_{SENSE}}{R_{SC}} \times \frac{R_3 + R_4}{R_4} \right]$$

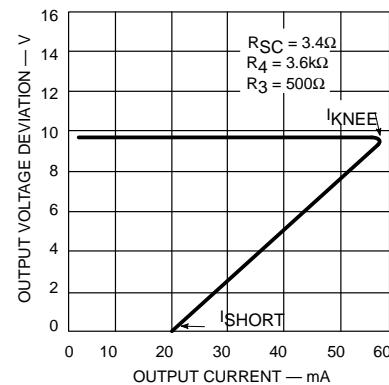

NOTES:

$$\frac{R_4}{R_3} = \frac{V_{OUT} I_{SC}}{V_{SENSE} (I_{KNEE} - I_{SHORT\ CKT})} - 1$$

$$R_{SC} = \frac{V_{SENSE}}{I_{SC}} \left[ 1 + \frac{R_3}{R_4} \right]$$

Foldback Current Limiting Regulator ( $V_{OUT} = 2$  to 7V)

SL00508

Figure 6. Typical Applications (cont.)