



UNISONIC TECHNOLOGIES CO., LTD

UC3842A/3843A

LINEAR INTEGRATED CIRCUIT

CURRENT MODE PWM CONTROL CIRCUITS

DESCRIPTION


The UTC **UC3842A/3843A** provide the necessary functions to implement off-line or DC to DC fixed frequency current mode , controlled switching circuits with minimal external components.

FEATURES

- *Low start up current (Typical 0.12mA)
- *Automatic feed forward compensation
- *Pulse-by-Pulse current limiting
- *Under-voltage lockout with hysteresis
- *Double pulse Suppression
- *High current totem pole output to drive MOSFET directly
- *Internally trimmed band gap reference
- *500kHz operation

ORDERING INFORMATION


Ordering Number		Package	Packing
Normal	Lead Free Plating		
UC3842A-D08-T	UC3842AL-D08-T	DIP-8	Tube
UC3842A-S08-R	UC3842AL-S08-R	SOP-8	Tape Reel
UC3842A-S08-T	UC3842AL-S08-T	SOP-8	Tube
UC3843A-D08-T	UC3843AL-D08-T	DIP-8	Tube
UC3843A-S08-R	UC3843AL-S08-R	SOP-8	Tape Reel
UC3843A-S08-T	UC3843AL-S08-T	SOP-8	Tube

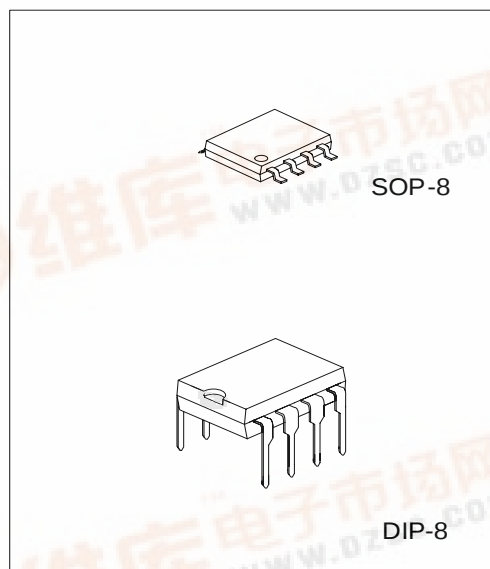


*Pb-free plating product number: UC3842AL
UC3843AL

UC3842AL-D08-T (1)Packing Type (2)Package Type (3)Lead Plating	(1) T: Tube, R: Tape Reel (2) D08: DIP-8, S08: SOP-8 (3) L: Lead Free Plating, Blank: Pb/Sn
--	--

■ PIN CONFIGURATION

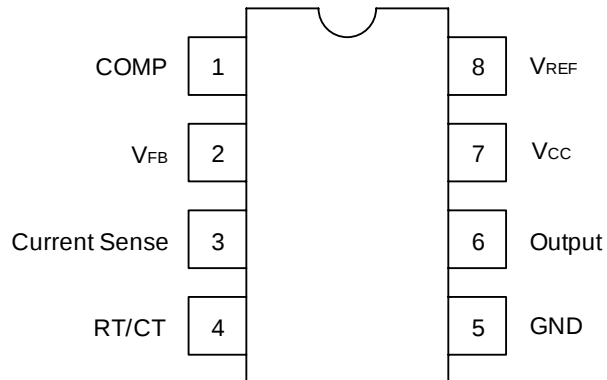

■ BLOCK DIAGRAM

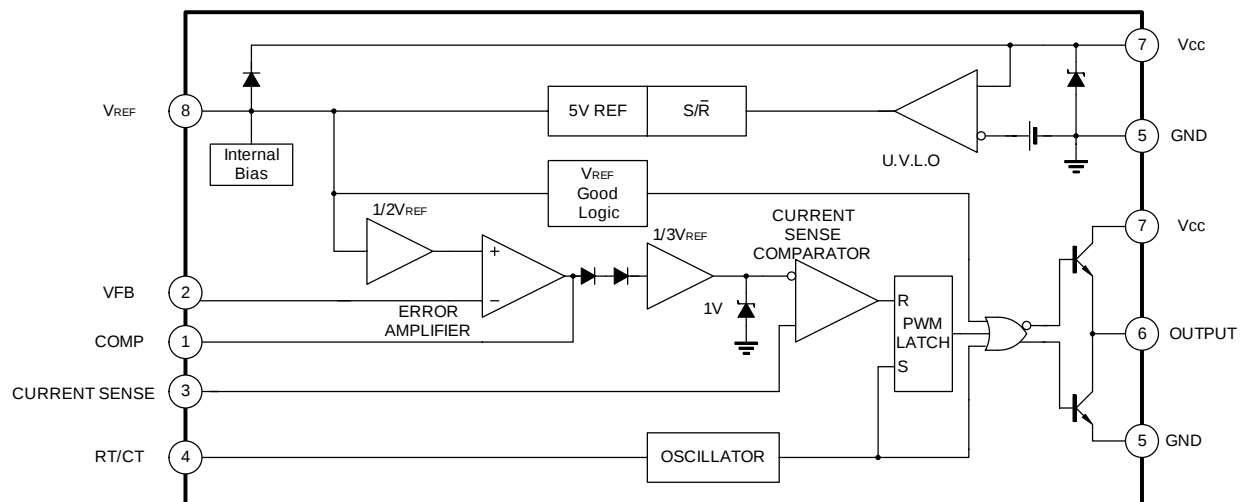

■ ABSOLUTE MAXIMUM RATINGS (Ta=25 °C)

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage(Low Impedance Source)		V_{CC}	30	V
Supply Voltage($I_{CC}<30mA$)		V_{CC}	Self Limiting	V
Output Current (Peak)		$I_{O(PEAK)}$	± 1	A
Output Energy (capacity Load)			5	μJ
Analog Inputs(pin 2,3)		$V_{I(ANA)}$	-0.3 ~ +6.3	V
Error Amplifier Output Sink Current		$I_{SINK(EA)}$	10	mA
Power Dissipation(Ta 25°C)	DIP-8	P_D	1.0	W
	SOP-8		0.5	W
Derated at Ta>25°C		P_D	8	mW/°C
Junction Temperature		T_J	+150	°C
Storage Temperature		T_{STG}	-65 ~ +150	°C

Note Absolute maximum ratings are those values beyond which the device which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS

(0°C Ta 70°C, $V_{CC}=15V$, $R_T=10k\Omega$, $C_T=3.3nF$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference Section						
Output Voltage	V_{REF}	$T_J=25^\circ C, I_{OUT}=1mA$	4.9	5	5.1	V
Line Regulation	ΔV_{REF}	12 $V_{IN} 25V$		6	20	mV
Load Regulation	ΔV_{REF}	1 $I_{OUT}=20mA$		6	25	mV
Temperature Stability		(Note 1)		0.2	0.4	mV/°C
Total Output Variation		Line, Load, Temp(Note 1)	4.82		5.18	V
Output Noise Voltage	V_{OSC}	10Hz f 10kHz, $T_J=25^\circ C$ (Note 1)		50		μV
Long Term Stability		Ta=25°C, 1000Hrs(Note 1)		5	25	mV
Output Short Circuit	I_{SC}		-30	-100	-180	mA
Oscillator Section						
Initial Accuracy	f	$T_J=25^\circ C$	47	52	57	kHz
Voltage Stability	$\Delta f/\Delta V_{CC}$	12 $V_{CC} 25V$		0.2	1	%
Temperature Stability		$T_{min} T_a T_{max}$ (Note 1)		5		%
Amplitude	V_{OSC}	Vpin 4 peak to peak		1.7		V
Error Amplifier Section						
Input Voltage	$V_{I(EA)}$	Vpin 1=2.5V	2.42	2.50	2.58	V
Input Bias Current	$I_{I(BIAS)}$			-0.3	-2	μA
AVOL		2 $V_{OUT} 4V$	60	90		dB
Unity Gain Bandwidth		$T_J=25^\circ C$ (Note 1)	0.7	1		MHz
PSRR		12 $V_{CC} 25V$	60	70		dB
Output Sink Current	$I_{O(SINK)}$	Vpin 2=2.7V, Vpin 1=1.1V	2	6		mA
Output Source Current	$I_{O(SOURCE)}$	Vpin 2=2.3V, Vpin 1=5V	-0.5	-0.8		mA
V_{OUT} High	V_{OH}	Vpin 2=2.3V, $R_L=15k\Omega$ to GND	5	6		V
V_{OUT} Low	V_{OL}	Vpin 2=2.7V, Vpin 1=1.1V		0.7	1.1	V

UC3842A/3843A

LINEAR INTEGRATED CIRCUIT

■ ELECTRICAL CHARACTERISTICS(Cont.)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Current Sense section							
Gain		G _V	(Note 2,3)	2.85	3	3.15	V/V
Maximum Input signal		V _{I(MAX)}	V _{pin 1} =5V(Note 2)	0.9	1	1.1	V
PSRR			12 V _{CC} 25V		70		dB
Input Bias Current		I _{BIAS}			-2	-10	μA
Delay to Output			V _{pin 3} =0 to 2V		150	300	ns
Output Section							
Output Level	Low	V _{OL}	I _{O(SINK)} =20mA		0.1	0.4	V
			I _{O(SINK)} =200mA		1.5	2.2	V
	High	V _{OH}	I _{O(SOURCE)} =20mA	13	13.5		V
			I _{O(SOURCE)} =200mA	12	13.5		V
Rise Time		t _R	T _J =25°C,C _L =1nF(Note 1)		50	150	ns
Fall Time		t _F	T _J =25°C,C _L =1nF(Note 1)		50	150	ns
Under-Voltage Lockout Output Section							
Start Threshold	3842A	V _{TH(ST)}		14.5	16	17.5	V
	3843A			7.8	8.4	9	V
Min. Operating Voltage	3842A	V _{OPR(MIN)}	After Turn On	8.5	10	11.5	V
	3843A			7	7.6	8.2	V
PWM Section							
Duty Cycle	MAX	D _(MAX)		95	97	100	%
	Min	D _(MIN)				0	%
Total Standby Current							
Start-up Current		I _{ST}			0.12	0.3	mA
Operating Supply Current		I _{CC(OPR)}	V _{pin 2} =V _{pin 3} =0V		11	17	mA
V _{CC} Zener Voltage		V _Z	I _{CC} =25mA		34		V

Note:1. These parameters, although guaranteed, are not 100% tested in production.


2. Parameters measured at trip point of latch with V_{pin 2}=0.

3. Gain defined as:

$$A = \frac{\Delta V_{pin 1}}{\Delta V_{pin 3}} ; 0 \leq V_{pin 3} \leq 0.8V$$


4. Adjust V_{CC} above the start threshold before setting at 15V.

■ OPEN-LOOP LABORATORY TEST FIXTURE

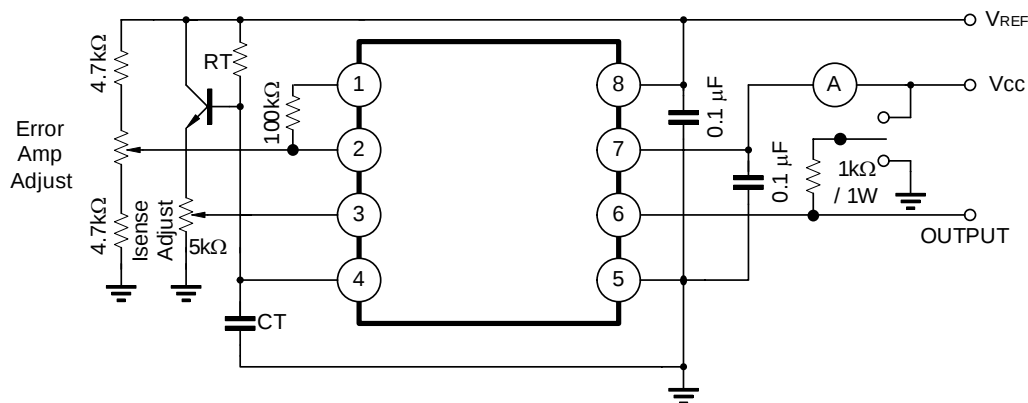


High peak current associated with capacity loads necessitate careful grounding techniques. Timing and bypass capacitors should be connected close to pin 5 in single point GND. The transistor and 5k Ω potentiometer are used to sample the oscillator waveform and apply an adjustable Ramp to Pin 3.

- UNDER-VOLTAGE LOCKOUT

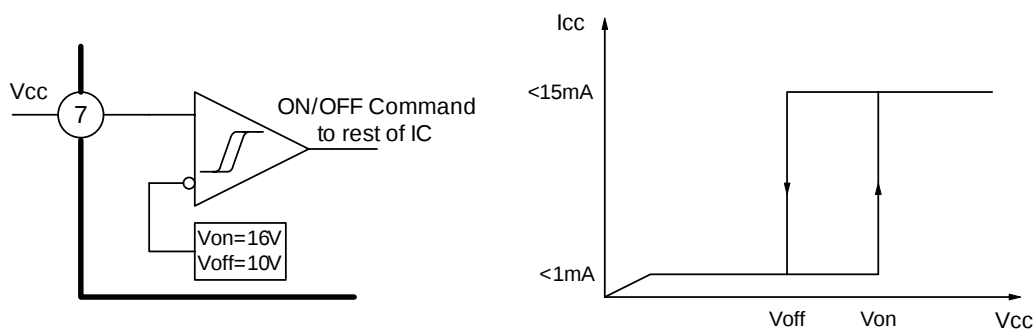


During Under-Voltage Lockout, the output driver is biased to a high impedance state. Pin 6 should be shunt to GND with a bleeder resistor to prevent activating the power switch with output leakage currents.

■ ERROR AMPLIFIER CONFIGURATION

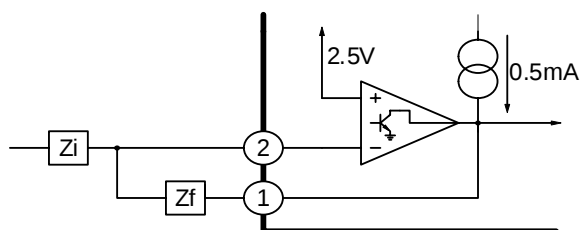


Error amplifier can source or sink up to 0.5mA

■ CURRENT SENSE CIRCUIT

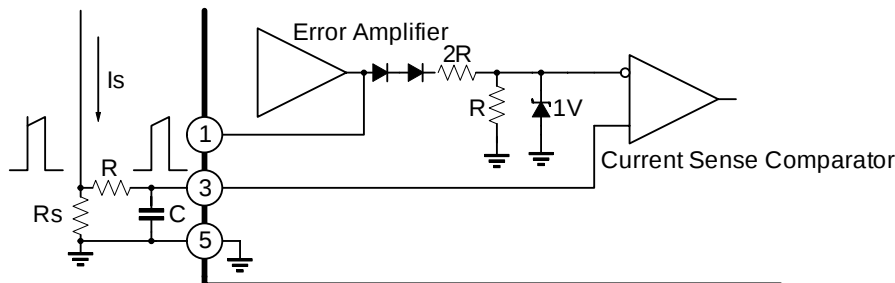




Peak current (I_s) determined by the formula: $I_{smax}=10V/R_s$.
A small RC filter be required to suppress switch transients.

■ SLOPE COMPENSATION

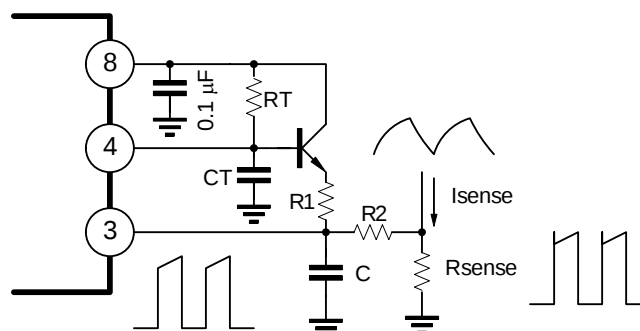


A fraction of the oscillator ramp can be resistively summed with the current sense signal to provide slope compensation for converts requiring duty cycles over 50%. Note that capacitor C, forms a filter with R2 to suppress the leading edge switch spikes.

■ OSCILLATOR SECTION

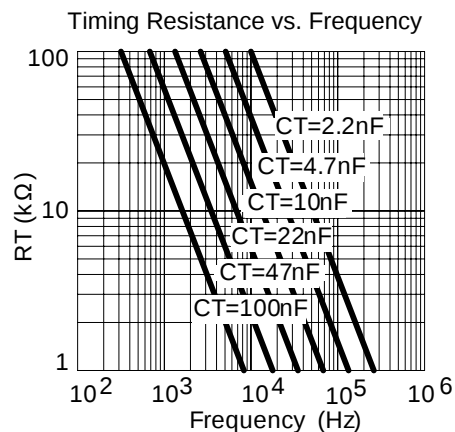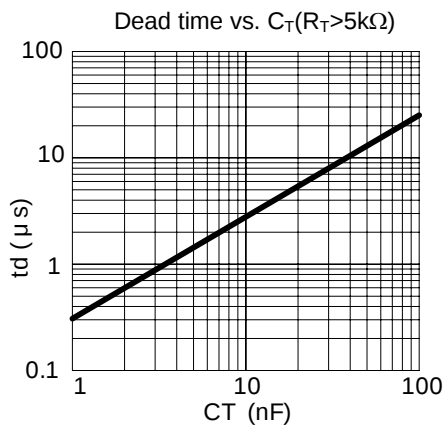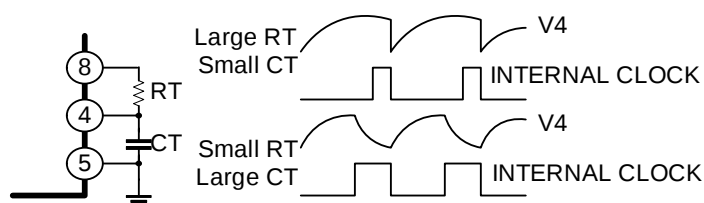


■ SHUTDOWN TECHNIQUES

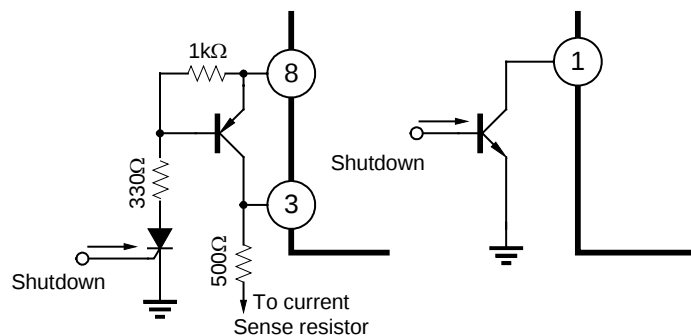


Shutdown UTC **UC3842A** can be accomplished by two methods; either raise pin 3 above 1V or pull Pin 1 below a voltage two diode drops above ground. Either method caused the output of PWM comparator to be high(refer to block diagram).The PWM latch is reset dominant so that the output will remain low until the next clock cycle after the shutdown condition at pins 1 and/or 3 is removed . In one example, an externally latched shut –down may be accomplished by adding an SCR which be reset by cycling V_{CC} below the lower UVLO threshold. At this point the reference turns off allowing the SCR to reset.

■ TYPICAL CHARACTERISTICS


Output Saturation Characteristics

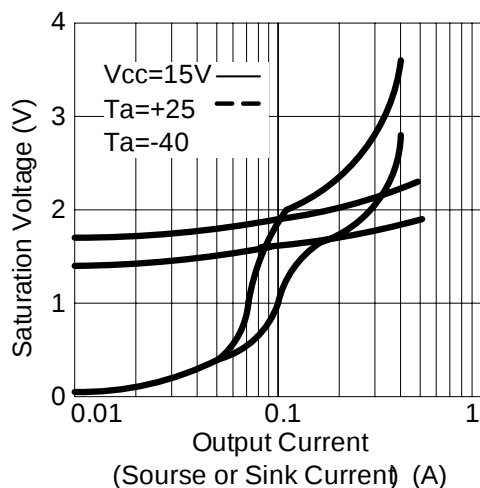


Error Amplifier Open-Loop Frequency Response

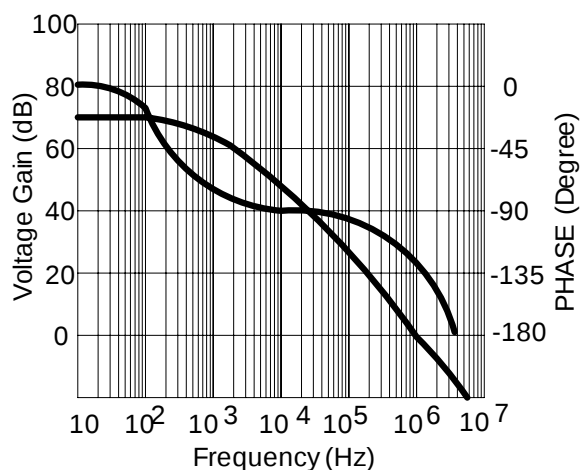


V_{REF} Temperature Drift

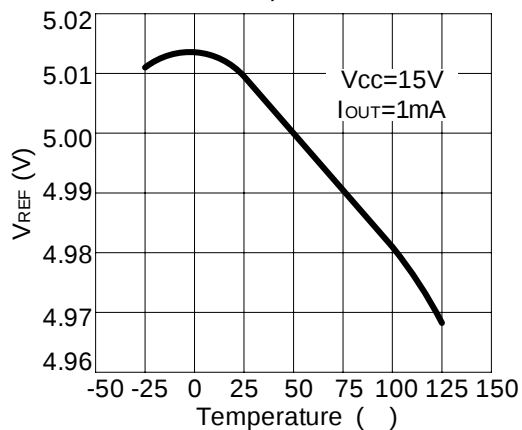

I_{start} Temperature Drift

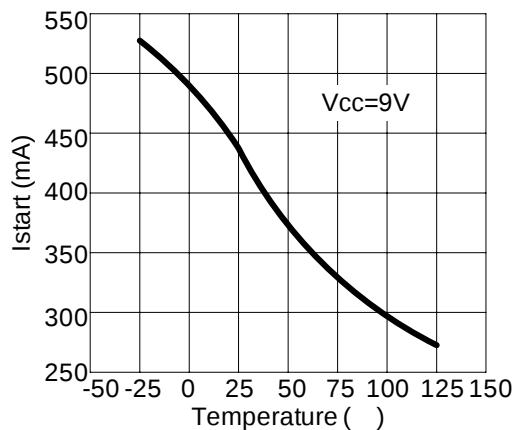

I_{CC} Temperature Drift

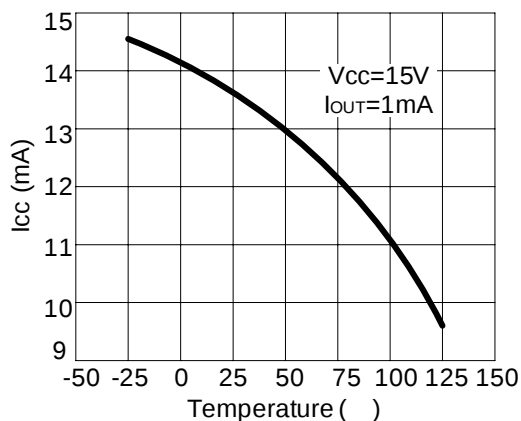

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.