

Surface Mount VCTCXO


ECVT496

- Low Profile
- Low Current Consumption
- Excellent Stability
- 3V Supply
- Custom options available



Parameter	ECVT496	
Frequency Range	9.60 to 20.0MHz	Specify
Temperature Stability	+/-2.5ppm -30 ⁰ to +75 ⁰ C (C) +/-1.0ppm -10 ⁰ to +60 ⁰ C (B)	Specify
Storage Temp	-30 ⁰ to +80 ⁰ C	
Stability vs Supply	+/-0.3ppm	
Supply Voltage	+3V (W) +5V (X)	Specify
Control Voltage	1.5V +/-1.0V Vcc +3V 2.5V +/-1.0V Vcc +5V	
Pulling	+/-5ppm min	
Trim Range	+/-3.0ppm min Internal Trimmer	
Supply Current	2.0mA	
Output Level	1.0V p-p (min) Vcc +5V 0.7Vpp (min) Vcc +3V	
Output Waveform	DC Cut Clipped Sine	
Output Load	10KΩ/10pF	
Aging	+/-1ppm / yr	

Environmental & Mechanical	
Humidity	+40 ⁰ C +/-2 ⁰ C 90% RH for 200Hours
Thermal Shock	+85 ⁰ C for 30 mins -30 ⁰ C for 30 mins
Vibration	10 - 55Hz 2mm amplitude 2 hours XYZ axis
Soldering Condition	235 +/-5 ⁰ c 2 Seconds +/-0.5 S

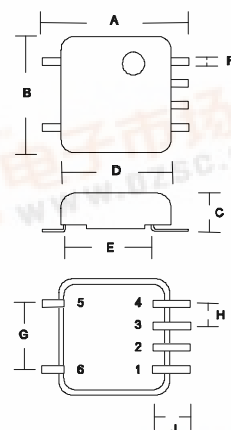

Part Numbering ECVT496 Z 9.60 B W I

Type _____
 Z= Clipped Sine _____
 Frequency _____
 Stability _____
 Supply Voltage _____
 Internal Trimmer _____

A	B	C	D	E	F	G	H	J
12.1	11.4	3.5	9.60	8.2	1.0	7.62	2.54	2.7

Dimensions in mm

Pin	1	2	3	4	5	6
	Vcc	Vcont	GND	O/P	GND	GND