


Directional Couplers 6 dB

Xinger®



Description

The 1D1304-6 is a low profile 6dB directional coupler in an easy to use surface mount package covering the AMPS and GSM bands. The 1D1304-6 is ideal for inline split/combine¹ amplifiers and for power injection and can be used in most high power designs. Parts have been subjected to rigorous qualification testing and units are 100% tested. They are manufactured using materials with x and y thermal expansion coefficients compatible with common substrates such as FR4, G-10 and polyamide.

Features:


- 800 - 1200 MHz
- Low loss
- High Directivity
- Surface Mountable
- Tape And Reel
- Convenient Package
- 100% Tested

ELECTRICAL SPECIFICATIONS**

Frequency MHz	Mean Coupling dB	Insertion Loss dB Max	VSWR Max:1	Freq. Sensitivity dB Max
815 - 960	6.0 ± 1.0	0.25	1.17	±0.40
800 - 1200	6.0 ± 1.0	0.25	1.17	±0.60
Directivity dB Min	Power Handling Watts	ΘJC °C / Watt	Operating Temp. °C	
20	150	9.8	-55 to +85	
20	150	9.8	-55 to +85	

**Specification based on performance of unit properly installed on microstrip printed circuit boards with 50 Ω nominal impedance. Specifications subject to change without notice.

Outline Drawing




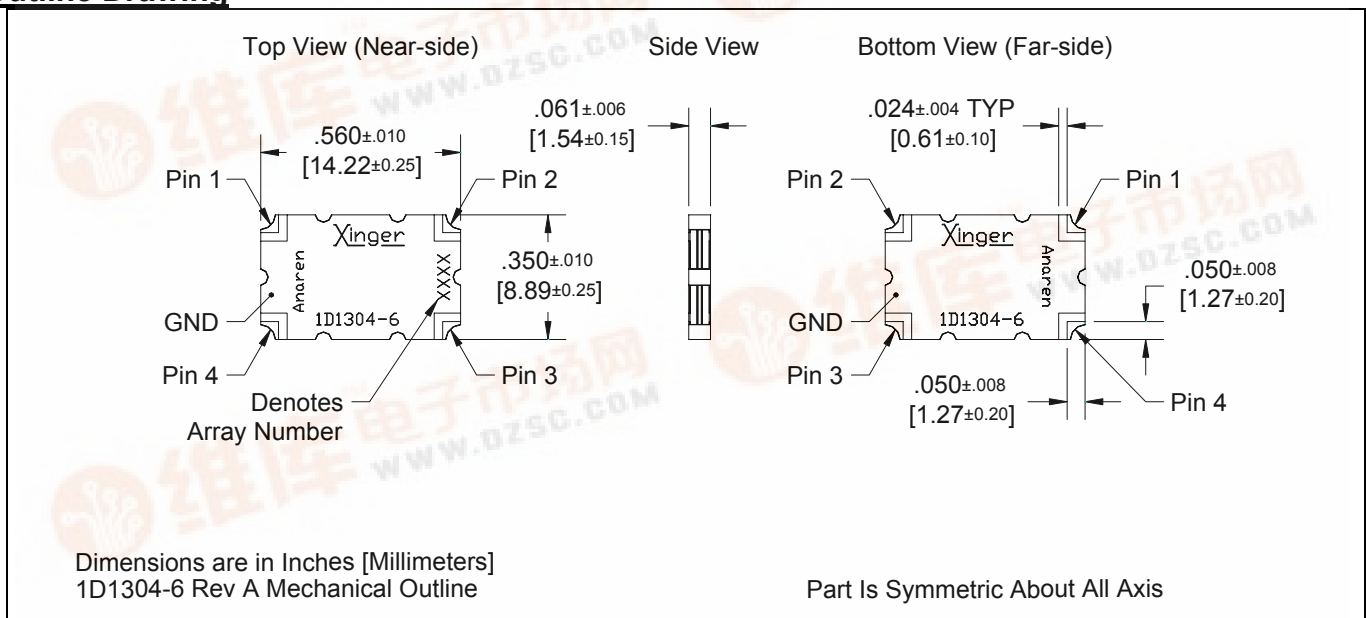


Model 1D1304-6


Rev. A



Typical Performance: 700 MHz. to 1300 MHz.

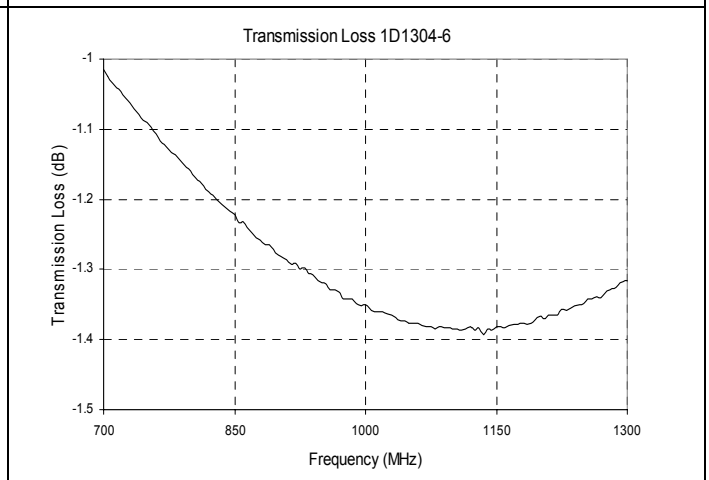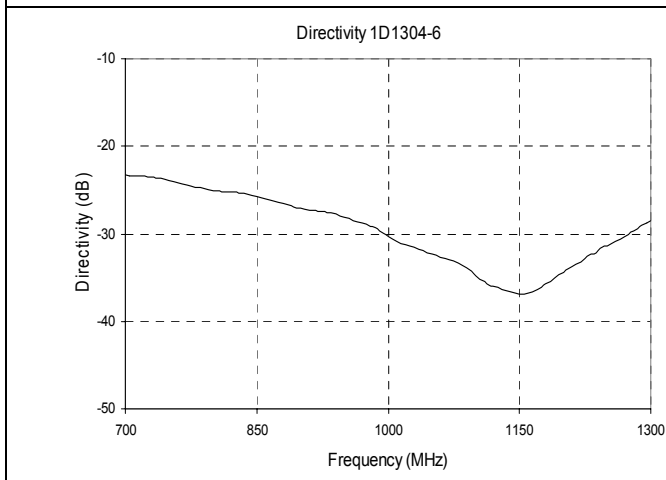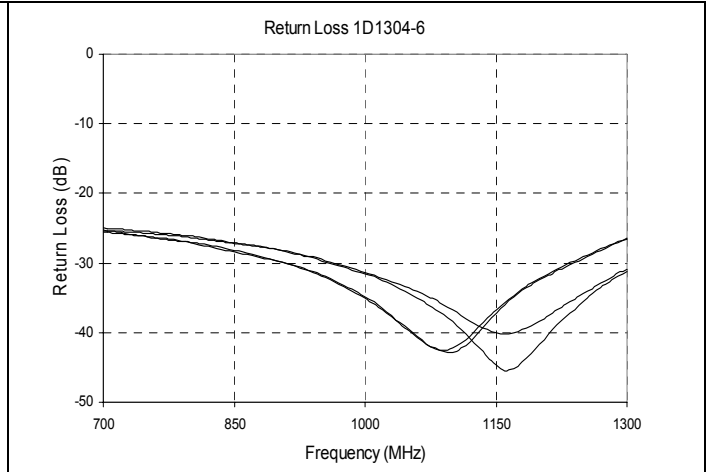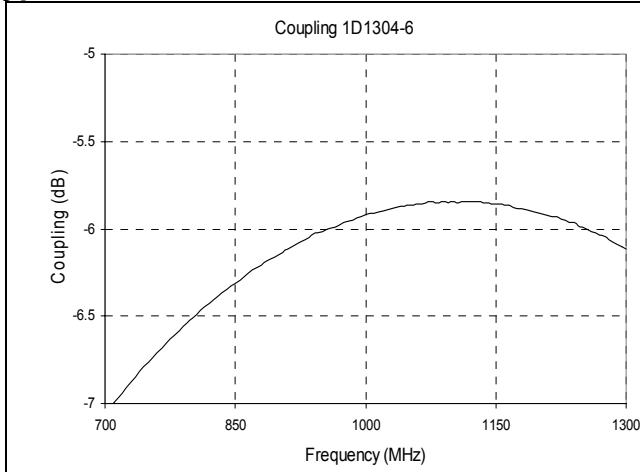

Pin Configuration




Directional Coupler Pin Configuration


	Pin 1	Pin 2	Pin 3	Pin 4
Configuration #1	Input	Output	Isolated	Coupled
Configuration #2	Output	Input	Coupled	Isolated
Configuration #3	Isolated	Coupled	Input	Output
Configuration #4	Coupled	Isolated	Output	Input

Mounting Footprint

To ensure proper electrical and thermal performance there must be a ground plane with 100% solder connection underneath the part



Part is Symmetric About All Axis

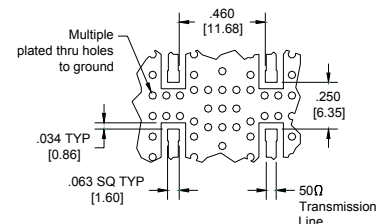

Dimensions are in Inches [Millimeters]
1D1304-6 Rev A Mounting Footprint

USA/Canada: (315) 432-8909
Toll Free: (800) 544-2414

Available on Tape and Reel For Pick and Place

