EVERLIGHT EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

0805 Package Chip LED (1.1mm Height)

17-21/GHC-YR1S2/3T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- · Pb-free.
- The product itself will remain within ROHS complaintVersion.

Descriptions

- The 17-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications, etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Chip	T 0.1
erial Emitted	Color Lens Color
aN Brilliant	Green Water Clear





http://www.everlight.com


Rev. 1

Page: 1 of 10

Prepared date:18-Aug-2005 Prepared by:Meng Yali



Package Outline Dimensions

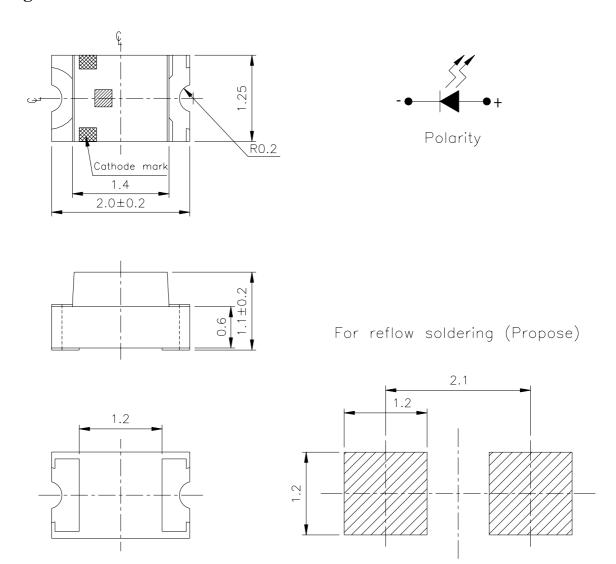

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 2 of 10

Device No.; SZ DSE-171-G11 Prepared date:18-Aug-2005 Prepared by:Meng Yali



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	I_{F}	25	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40~ +90	$^{\circ}\!\mathbb{C}$	
Electrostatic Discharge(HBM)	ESD	150	V	
Power Dissipation	Pd	110	mW	
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	100	mA	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I_{v}	112		285	mcd	
Viewing Angle	2 \theta 1/2		140		deg	
Peak Wavelength	λр		518		nm	
Dominant Wavelength	λd	520		535	nm	I _F =20mA
Spectrum Radiation Bandwidth	Δλ		35		nm	
Forward Voltage	V_{F}		3.3	3.7	V	
Reverse Current	I_R			50	μ A	V _R =5V

Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.10V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 3 of 10

Device No.; SZ DSE-171-G11 Prepared date:18-Aug-2005 Prepared by:Meng Yali



Bin Range Of Dom. Wavelength

Groups	Bin	Min	Max	Unit	Condition
Y	X	520	525	nm	
	Y	525	530		IF=20mA
	Z	530	535		

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
R1	112	140	mcd	I _F =20mA
R2	140	180		
S1	180	225		
S2	225	285		


Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 4 of 10 Prepared by:Meng Yali

Device No.; SZ DSE-171-G11 Prepared date:18-Aug-2005

Typical Electro-Optical Characteristics Curves

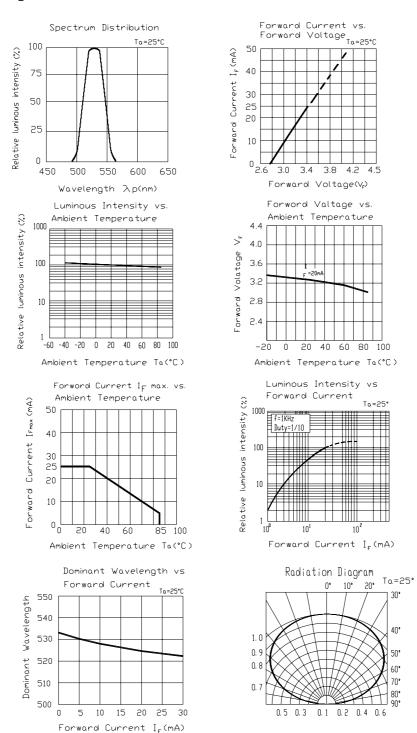

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

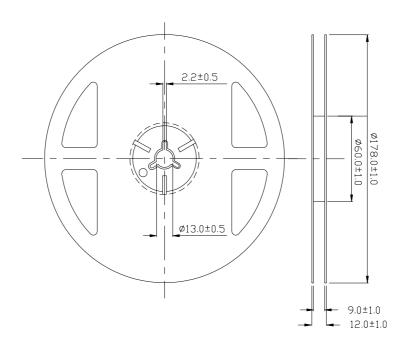


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 6 of 10


Device No.; SZ DSE-171-G11 Prepared date:18-Aug-2005 Prepared by:Meng Yali

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

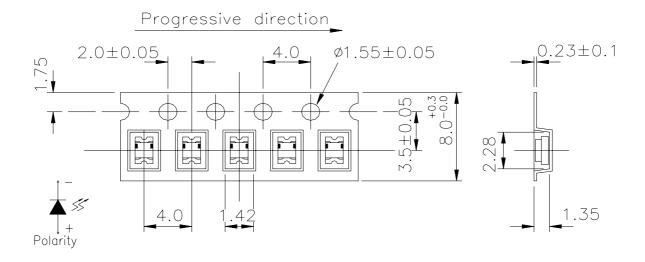

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm.

Moisture Resistant Packaging

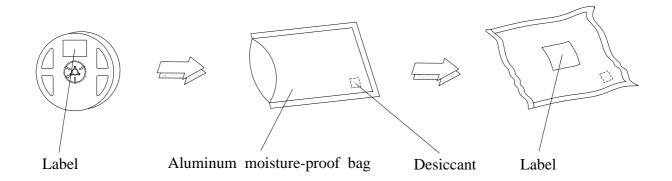

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 7 of 10

Device No.; SZ DSE-171-G11 Prepared date:18-Aug-2005 Prepared by:Meng Yali

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 8 of 10

Device No.; SZ DSE-171-G11 Prepared date:18-Aug-2005 Prepared by:Meng Yali


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90% RH or less.
- 2.3 After opening the package: The LEDs should be kept at 30°C or less and 60% RH or less(Floor life). However, it's recommended that the LEDs should be used within 168 hours (7 days) after opening the package. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

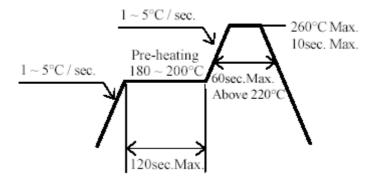

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 9 of 10

Device No.; SZ DSE-171-G11 Prepared date:18-Aug-2005 Prepared by:Meng Yali




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

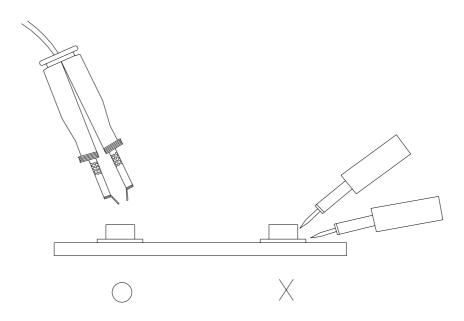

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 10 of 10

Device No.; SZ DSE-171-G11 Prepared date:18-Aug-2005 Prepared by:Meng Yali