



C1379

PXO

**Typical Applications**

Telecommunication  
Universal Clock

**Features**

Standard 4-Pin DIP Package (Half Size)  
Enable Function

**Previous Vectron Model Numbers**

MCO1XXX; AB;

**Frequency range**

1 MHz – 100 MHz

**Frequency stabilities<sup>1</sup>**

Parameter	Min	Typ	Max.	Units	Operating temp range	Ordering Code <sup>5</sup>
Overall (vs. Initial, vs. operating temperature range vs. supply voltage change vs. load change vs. aging /1. Year)	-100.0		+100.0	ppm	-0 ... +70°C	C104
	-50.0		+50.0	ppm	-0 ... +70°C	C505
	-25.0		+25.0	ppm	-0 ... +70°C	C255
	-100.0		+100.0	ppm	-40 ... +85°C	F104
	-50.0		+50.0	ppm	-40 ... +85°C	F505
	-32.0		+32.0	ppm	-40 ... +85°C	F325

**Supply voltage**

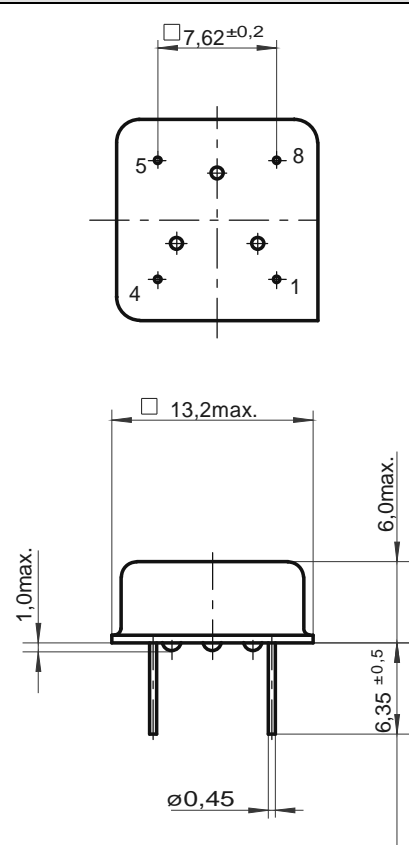
Parameter	Min	Typ	Max.	Units	Condition	Ordering Code <sup>5</sup>
Supply voltage (Vs)	4.75	5.0	5.25	VDC		SV050
Current consumption			40 50 55 70	mA	@ HCMOS fo < 24.0 MHz @ HCMOS fo < 50.0 MHz @ HCMOS fo < 70.0 MHz @ HCMOS fo < 100.0 MHz	
Supply voltage (Vs)	3.135	3.3	3.465	VDC		SV050
Current consumption			30 35 40 50	mA	@ HCMOS fo < 24.0 MHz @ HCMOS fo < 50.0 MHz @ HCMOS fo < 70.0 MHz @ HCMOS fo < 100.0 MHz	

**RF output**

Parameter	Min	Typ	Max.	Units	Condition	Ordering Code <sup>5</sup>
Signal	HCMOS					RFH
Load		15.0		pF		
Rise and Fall time			10	ns	@ 15 pF 10 to 90 %	
Duty cycle	40		60	%	@ Vs/2	



## Enclosures

Type A		Package Codes:	
Code	Height "H"	Pin Length "L"	
A1	7.5	6.35	
 <p style="text-align: center;">Dimensions: mm</p>			
Pin Connections			
1 Enable 4 Ground (Case) 5 RF Output 8 Supply Voltage Input (Vs) Outline Drawing:	Option	Pin 1	Pin 5
	Enable	Tri State	High Open Low
Marking			
C1379A1-xxxx frequency * C XYYWW			

## Absolute Maximum Ratings

Parameter	Min	Typ	Max.	Units	Condition
Supply voltage (Vs)			7	V	
Operable temperature range	-30		+80	°C	
Storage temperature range	-40		+90	°C	

## How to Order this Product:

Step 1	Use this worksheet to forward the following information to your factory representative:			
Model	Stability Code	Supply Voltage Code	RF Output Code	Package Code
C1379				

*Example:* C1379                                      C104                                      SV050                                      RFH                                      A1

Step 2	The factory representative will then respond with a Vectron Model Number in the following Configuration:		
Model	Package Code	Dash	Dash Number
C1379	[Customer Specified Package Code]	-	[Factory Generated 4 digit number]

*Typical P/N = C1379A1-0001*

### Notes:

- 1 Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
- 2 Unless otherwise stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C)
- 3 Phase noise degrades with increasing output frequency.
- 4 Subject to technical modification.
- 5 Contact factory for availability.