

SKiIP 29AHB08V1



3-phase bridge rectifier +
brake chopper

SKiIP 29AHB08V1

Features

- Ultrafast NPT IGBTs
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connenctions
- UL recognised file no. E63532

Typical Applications


- Input bridge for Inverter up to 30 kVA

Remarks

- V_{CEsat} , V_F = chip level value

Absolute Maximum Ratings		$T_s = 25\text{ }^\circ\text{C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT - Chopper			
V_{CES}		600	V
I_C	$T_s = 25\text{ (70) }^\circ\text{C}$	125 (93)	A
I_{CRM}	$t_p \leq 1\text{ ms}$	300	A
V_{GES}		± 15	V
T_j		- 40 ... + 150	$^\circ\text{C}$
Diode - Chopper			
I_F	$T_s = 25\text{ (70) }^\circ\text{C}$	120 (89)	A
I_{FRM}	$t_p \leq 1\text{ ms}$	300	A
T_j		- 40 ... + 150	$^\circ\text{C}$
Diode / Thyristor - Rectifier			
V_{RRM}		800	V
I_F / I_T	$T_s = 70$	82	A
I_{FSM} / I_{TSM}	$t_p = 10\text{ ms}$, sin 180°, $T_j = 25\text{ }^\circ\text{C}$	1000	A
i^2t	$t_p = 10\text{ ms}$, sin 180°, $T_j = 25\text{ }^\circ\text{C}$	5500	A ² s
T_j	Diode	- 40 ... + 150	$^\circ\text{C}$
T_j	Thyristor	- 40 ... + 125	$^\circ\text{C}$
I_{tRMS}	per power terminal (20 A / spring)	120	A
T_{stg}	$T_{op} \leq T_{stg}$	- 40 ... + 125	$^\circ\text{C}$
V_{isol}	AC, 1 min.	2500	V

Characteristics		$T_s = 25\text{ }^\circ\text{C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT - Chopper					
V_{CEsat}	$I_{Cnom} = 150\text{ A}$, $T_j = 25\text{ (125) }^\circ\text{C}$		2 (2,2)	2,5 (2,7)	V
$V_{GE(th)}$	$V_{GE} = V_{CE}$, $I_C = 3\text{ mA}$	3	4	5	V
$V_{CE(TO)}$	$T_j = 25\text{ (125) }^\circ\text{C}$		1,2 (1,1)	1,3 (1,2)	V
r_T	$T_j = 25\text{ (125) }^\circ\text{C}$		5,3 (7,3)	8 (10)	m Ω
C_{ies}	$V_{CE} = 25\text{ V}$, $V_{GE} = 0\text{ V}$, $f = 1\text{ MHz}$		9		nF
C_{oes}	$V_{CE} = 25\text{ V}$, $V_{GE} = 0\text{ V}$, $f = 1\text{ MHz}$		1,7		nF
C_{res}	$V_{CE} = 25\text{ V}$, $V_{GE} = 0\text{ V}$, $f = 1\text{ MHz}$		2,1		nF
$R_{th(j-s)}$	per IGBT		0,4		K/W
$t_{d(on)}$	under following conditions		20		ns
t_r	$V_{CC} = 300\text{ V}$, $V_{GE} = \pm 15\text{ V}$		25		ns
$t_{d(off)}$	$I_{Cnom} = 150\text{ A}$, $T_j = 125\text{ }^\circ\text{C}$		185		ns
t_f	$R_{Gon} = R_{Goff} = 4\text{ }^\circ\Omega$		15		ns
E_{on}	inductive load		5,7		mJ
E_{off}			3,7		mJ
Diode - Chopper					
$V_F = V_{EC}$	$I_{Fnom} = 150\text{ A}$, $T_j = 25\text{ (125) }^\circ\text{C}$		1,7 (1,7)	2,1 (2,1)	V
$V_{(TO)}$	$T_j = 25\text{ (125) }^\circ\text{C}$		1 (0,9)	1,1 (1)	V
r_T	$T_j = 25\text{ (125) }^\circ\text{C}$		4,7 (5,3)	6,7 (7,3)	m Ω
$R_{th(j-s)}$	per diode		0,55		K/W
I_{RRM}	under following conditions		270		A
Q_{rr}	$I_{Fnom} = 150\text{ A}$, $V_R = 300\text{ V}$		18		μC
E_{rr}	$V_{GE} = 0\text{ V}$, $T_j = 125\text{ }^\circ\text{C}$		3,5		mJ
	$di_f/dt = 13700\text{ A}/\mu\text{s}$				

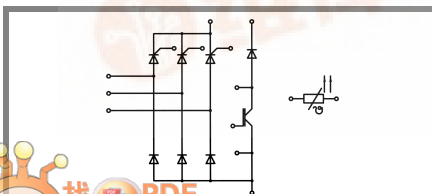

SKiiP 29AHB08V1

Characteristics		$T_s = 25\text{ °C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
Diode - Rectifier					
V_F	$I_{Fnom} = 75\text{ A}$, $T_j = 25\text{ °C}$		1,2		V
$V_{(TO)}$	$T_j = 150\text{ °C}$		0,8		V
r_T	$T_j = 150\text{ °C}$		7		mΩ
$R_{th(j-s)}$	per diode		0,7		K/W
Thyristor - Rectifier					
V_T	$I_{Fnom} = 120\text{ A}$, $T_j = 25\text{ (125) °C}$			1,8 (1,7)	V
$V_{T(TO)}$	$T_j = 125\text{ °C}$			1,1	V
r_T	$T_j = 125\text{ °C}$			5	mΩ
V_{GT}	$T_j = 25\text{ °C}$			3	V
I_{GT}	$T_j = 25\text{ °C}$	150			mA
I_H	$T_j = 25\text{ °C}$		200		mA
I_L	$T_j = 25\text{ °C}$		400		mA
$dv/dt_{(cr)}$	$T_j = 125\text{ °C}$			1000	V/μs
$di/dt_{(cr)}$	$T_j = 125\text{ °C}$			50	A/μs
$R_{th(j-s)}$	per thyristor		0,65		K/W
Temperature Sensor					
R_{ts}	3 %, $T_r = 25\text{ (100) °C}$		1000(1670)		Ω
Mechanical Data					
w			65		g
M_s	Mounting torque	2		2,5	Nm

SKiiP 29AHB08V1

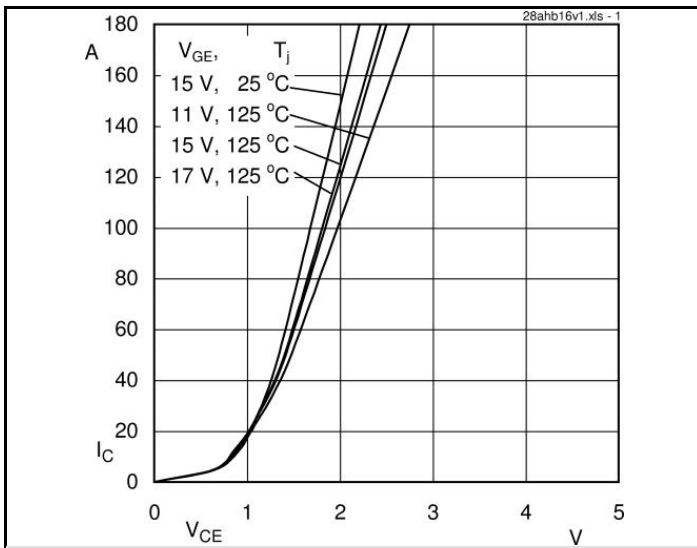


Fig. 1 Typ. output characteristic

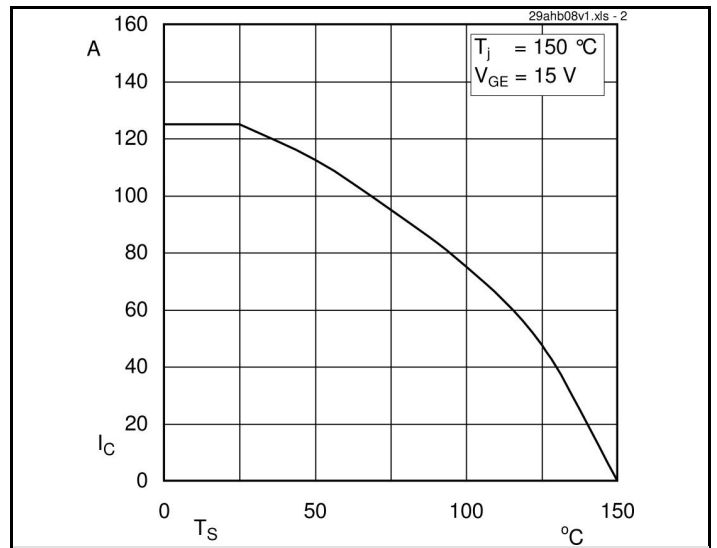


Fig. 2 Typ. rated current vs. temperature

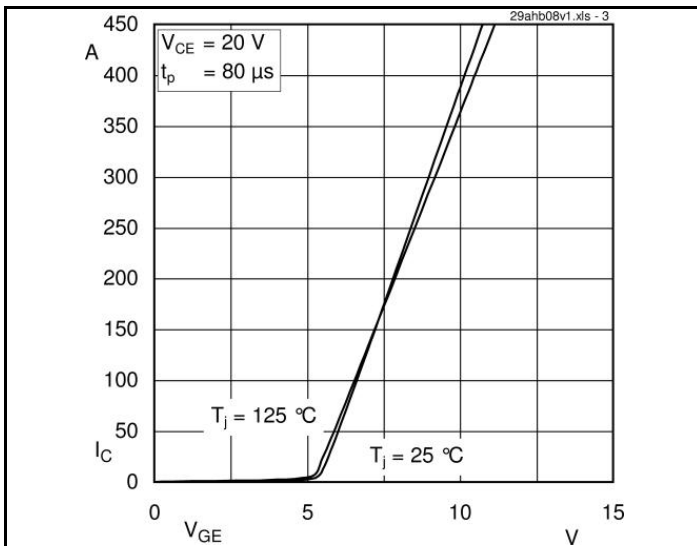


Fig. 3 Typ. transfer characteristic

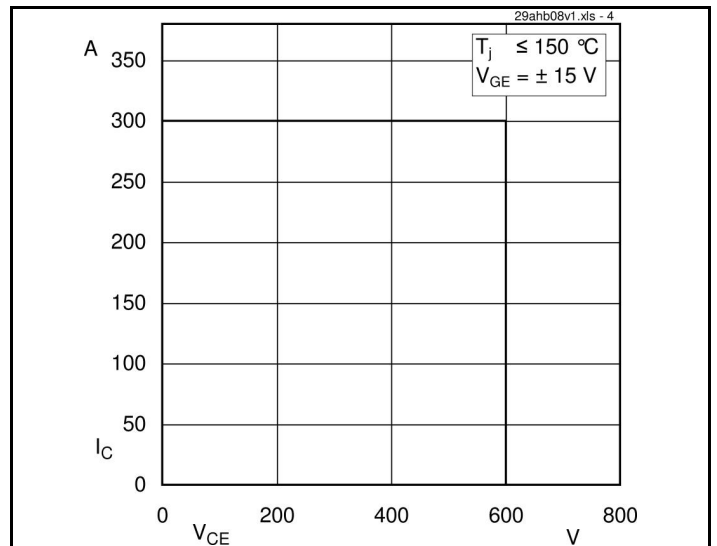


Fig. 4 Reverse bias safe operating area

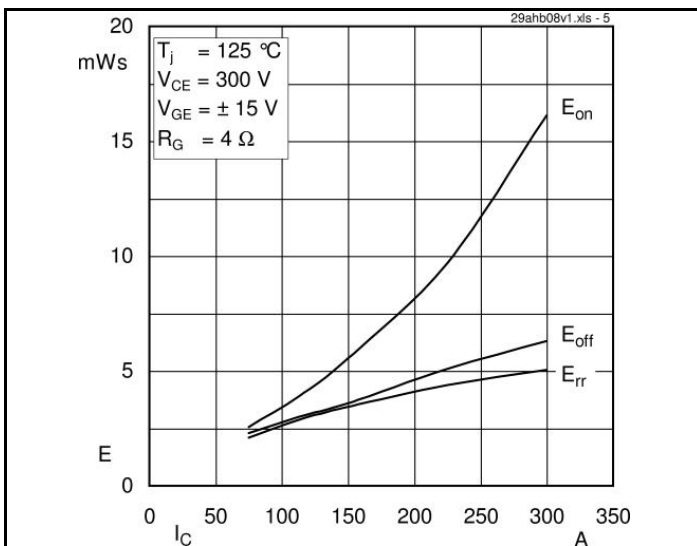


Fig. 5 Typ. Turn-on /-off energy = $f(I_C)$








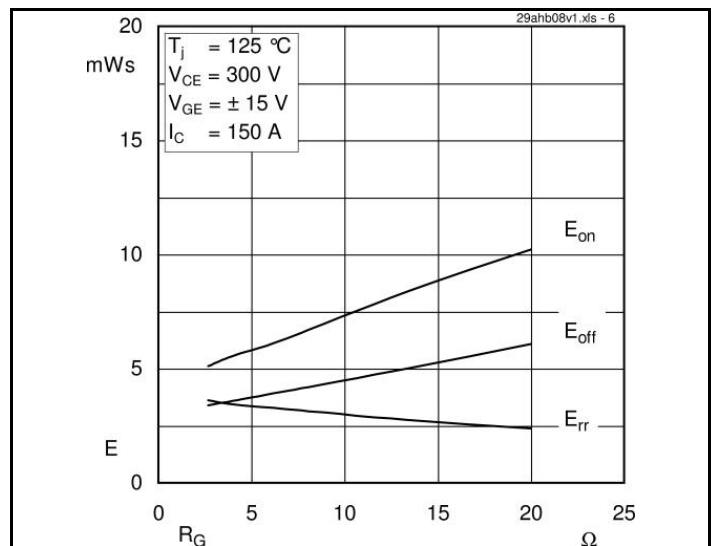


Fig. 6 Typ. Turn-on /-off energy = $f(R_G)$

SKiP 29AHB08V1

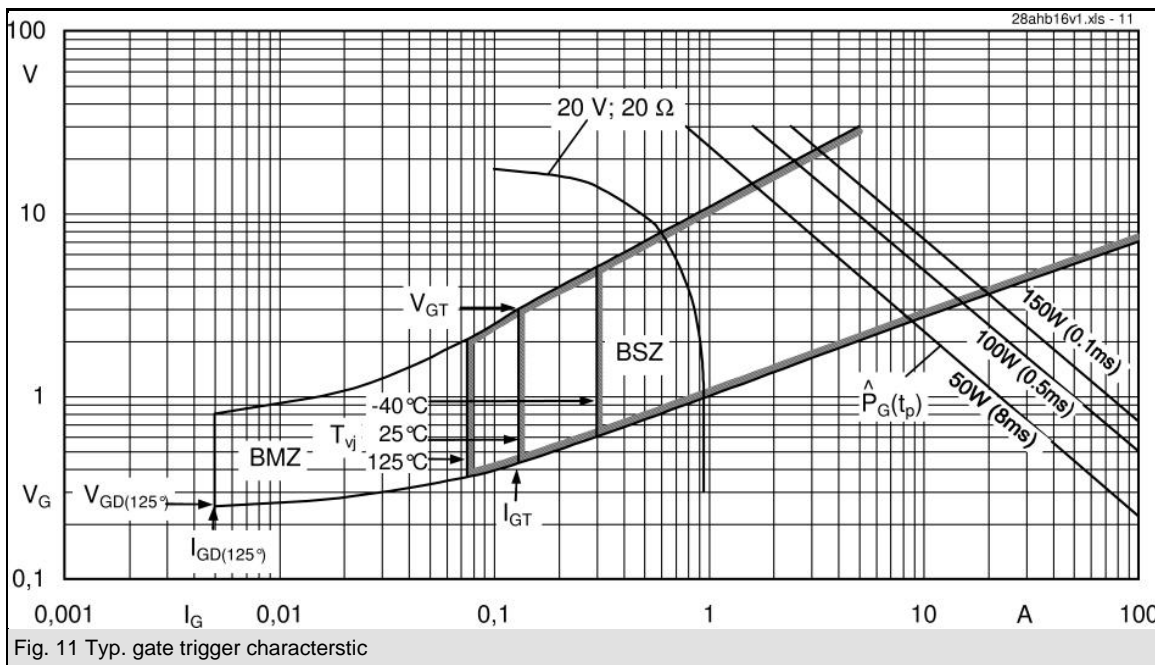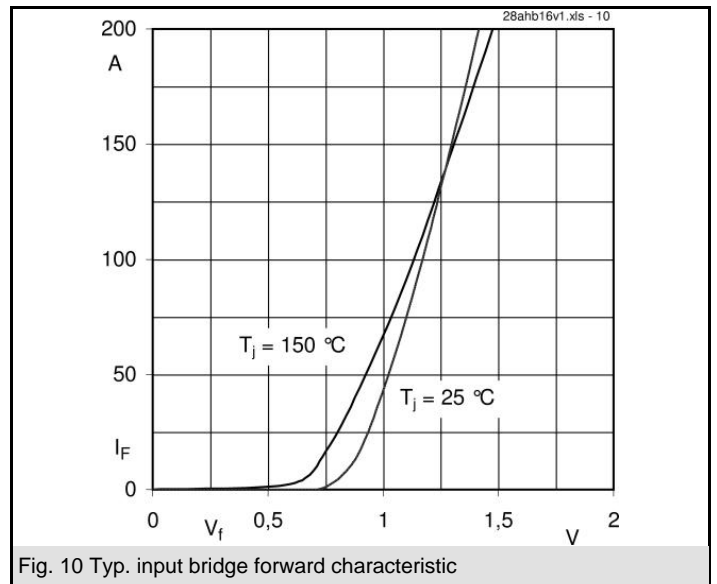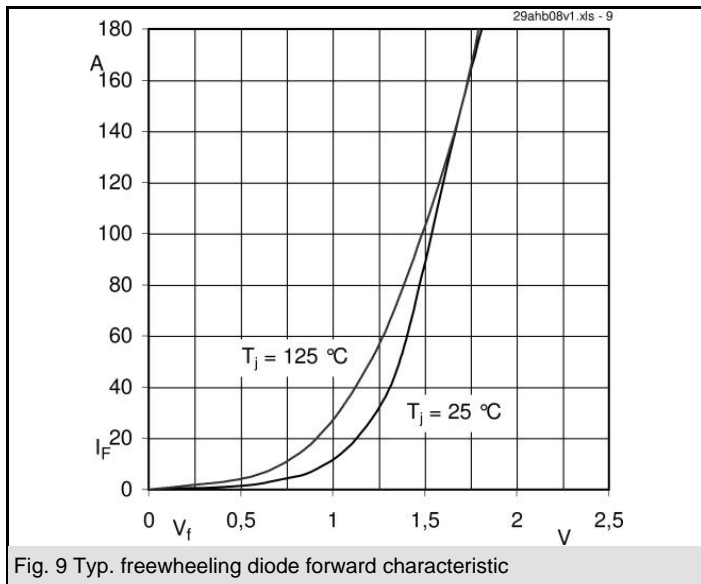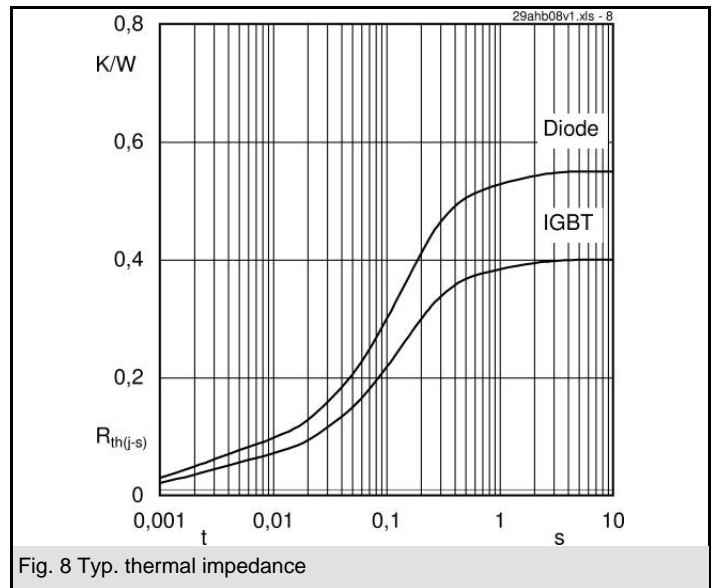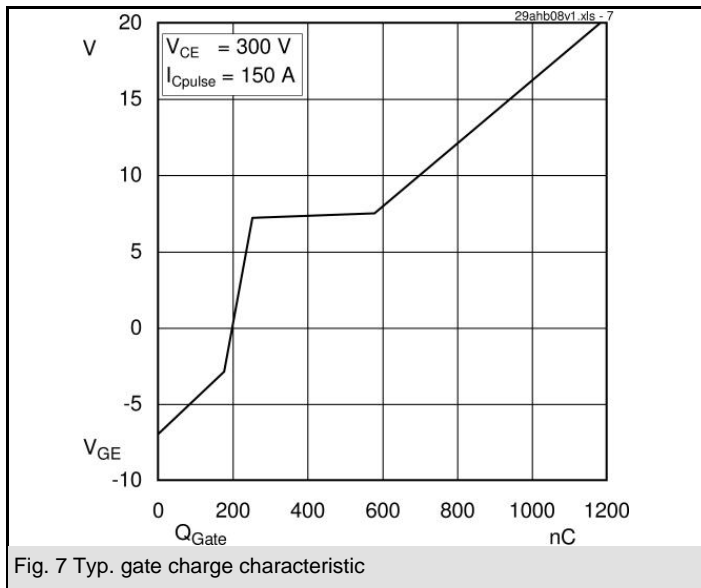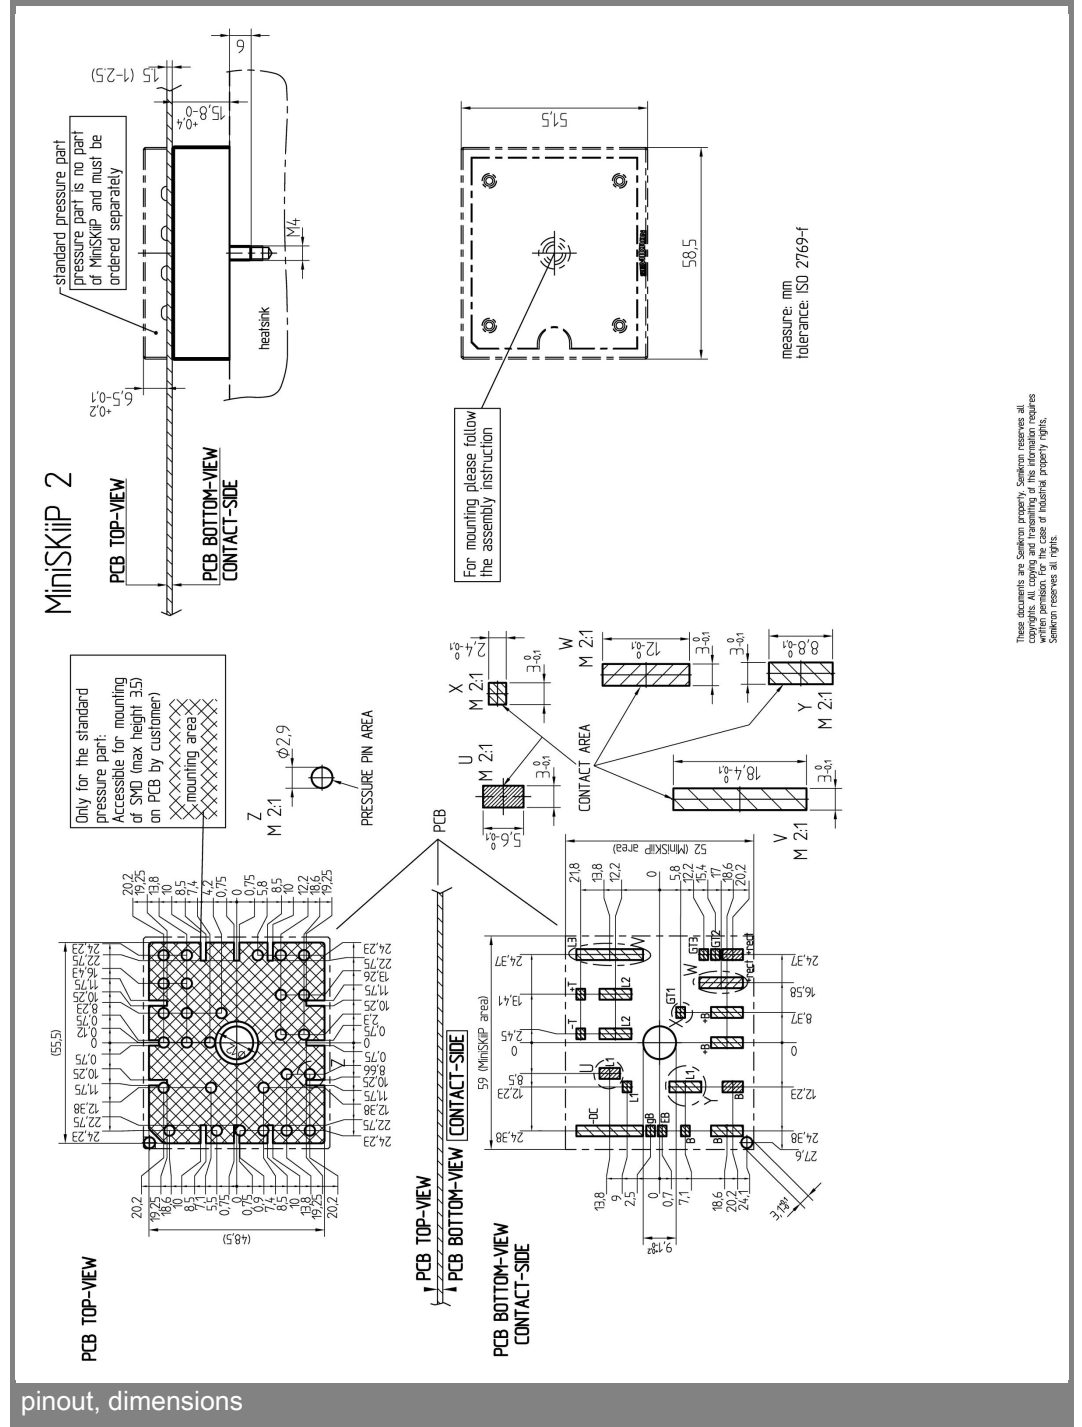

SKiiP 29AHB08V1

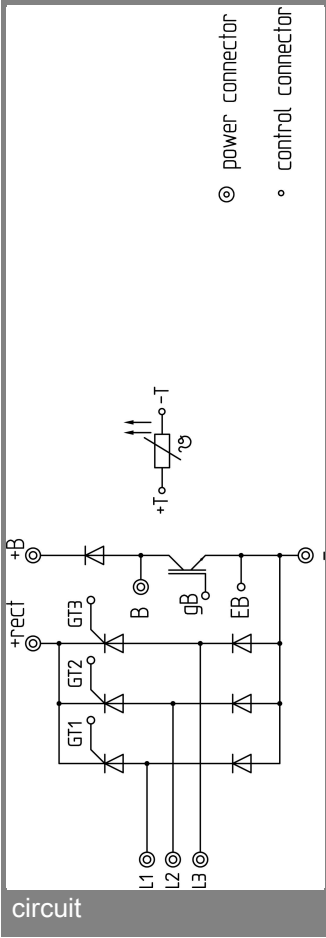

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.